

REV.	DATE	DESCRIPTION
NC	05/08/03	INITIAL RELEASE



RECOMMENDED CABLE
STRIPPING DIM'S.

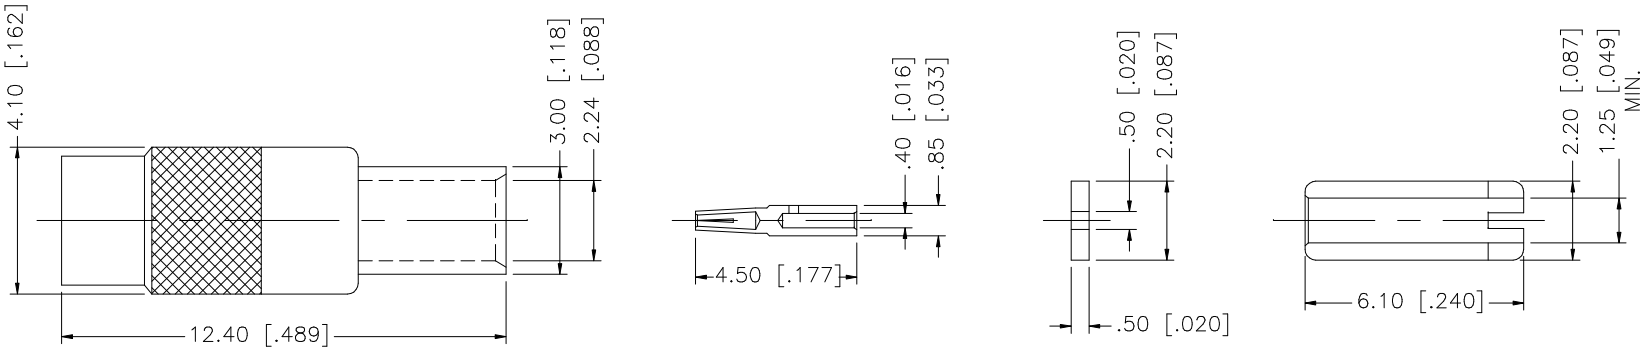

NOTE:

1. CONTACT PIN TO SOLDER

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	SOLDER BARREL	BRASS	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	05/08/03
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/262/262125.DWG

Amphenol Connex

PART DESCRIPTION
MMCX SEMI–RIGID JACK
(FOR .047" SEMI–RIGID CABLE)

PART NO. 262125

DWG. NO.	REV.	SIZE	SCALE
262125.DWG	NC	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-G0805CLF 68001-200HLF 70218-1116LF DCMF37P 54202-S08-07LF 70430-164LF 86093968813H45V1LF 863013A LD25S33E4GV00LF 70234-112LF 68001-108HLF 69192-408HLF 91614-403ALF RJE061661210 67996-204HLF 86130202123355E1LF 65781-158 86093967896755LF RJSBE5080C2 LD15P33E4GV00LF 68000-236HLF 68002116HLF 86093968191755E3LF CD15S13E4RV09LF 76384-316LF 86093488314745V1LF 95157-140LF D15P13A6RV12LF DAPO15S365TLF DEM09P032N