
NOTES:

1. MATERIALS AND FINISHES:
   BODY – BRASS, NICKEL PLATING
   CONTACT – BRASS, GOLD PLATING
   INSULATOR – PTFE, NATURAL
2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM
   B. FREQUENCY RANGE: DC 0–2 GHz
   C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: – 65°C to +165°C
4. SOLDER CONTACT TO CABLE.
   WHEN CRIMPING CONTACT TO CABLE, CRIMP WITH AMPHENOL TOOL 227–944 (M22520/5–01) AND DIE SET 227–1221–13, CAVITY 'B' (M22520/5–13, CLOSURE 'B')
5. WHEN CRIMPING FERRULE TO CABLE, CRIMP WITH AMPHENOL TOOL 277–944 (M22520/5–01) AND DIE SET 227–1221–13 CAVITY 'A' (M22520/5–13 CLOSURE 'A')
6. USE WITH BELDEN 1505A, 1426A, 9659, 9259, 9240, 8212, 9274, 9275, 9100 CABLES AND CLARK CV7559 CABLES.


THIRD ANGLE PROJ.


REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
A2	SEE SHEET 1	27–Jul–05	41541	SH
A3	SEE SHEET 1	16–Aug–05	––	SH
B	SEE SHEET 1	27–Feb–08	––	AW
K	REDRAWN TO UPDATE FORMAT	29–Dec–08	47204	SH
L	SEE SHEET 1	09–Sep–10	47967	SH
M	NOTE 4 WAS CHANGED\RD–10121301F	27–Dec–10	48342	SH

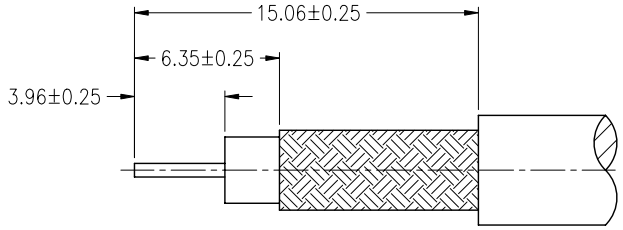

RECOMMENDED
CABLE STRIPPING DIM'S

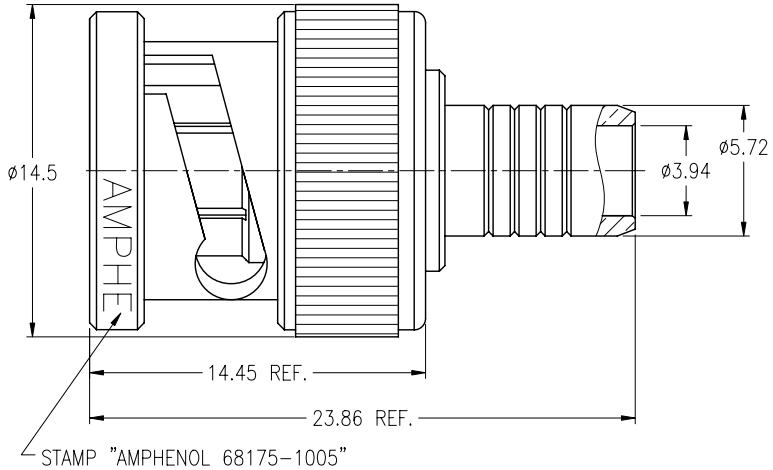

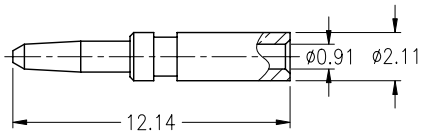

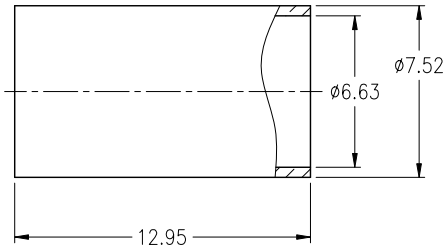

THIS CONNECTOR IS COVERED BY U.S. PATENT 3,336,563

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

<0.5mm	0.5 – 6mm	6 – 30mm	30 – 120mm	ANGLES
±0.05mm	±0.1mm	±0.2mm	± 0.3mm	±1°

NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

FINISH

DRAWN	F.WANG	DATE 27–Dec–10
ENGINEER	S.LI	DATE 27–Dec–10
APPROVED	S.HSIEH	DATE 27–Dec–10
CAD FILE	F:\DWG\CNPD\68175\1005–MSZ	

TITLE
BNC PLUG QUICK CRIMP FOR RG59/U TYPE CABLE .032 CENTER CONDUCTOR

SCALE: 3/1 | SHEET 2 OF 2

DWG SIZE	CODE ID	REV
B	74868	M

Amphenol RF
Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO. 68175–1005
ITEM NO. 68175–1005
PART NO. 68175–1005

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

69192-408HLF 863013A DCMF37P 68001-108HLF 86093967896755LF LD25S33E4GV00LF 68001-200HLF 70234-112LF 70430-164LF 76384-316LF CD15S13E4RV09LF DAPO15S365TLF RJE061661210 54202-G0805CLF 67996-204HLF 86093968191755E3LF 86093968813H45V1LF 91614-403ALF 65781-158 68002116HLF 68000-236HLF 70218-1116LF D15P13A6RV12LF LD15P33E4GV00LF RJSBE5080C2 86093488314745V1LF 95157-140LF 54202-S08-07LF 86130202123355E1LF DEM09P032N