



REV.	DATE	DESCRIPTION
A	01/13/99	ADD CRIMP NOTES / CHANGE FERRULE DIMS.
B	07/20/05	UPDATE DRAWING FORMAT
C	10/31/05	MODIFY CRIMP NOTES
D	02/15/07	REVISE BARREL O.D. , FERRULE DIA.

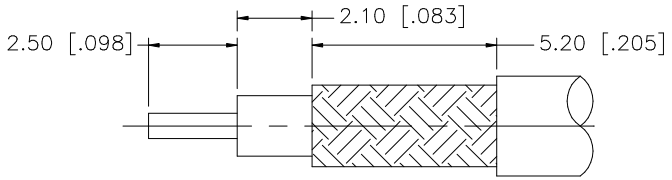

RECOMMENDED CABLE
STRIPPING DIMENSIONS

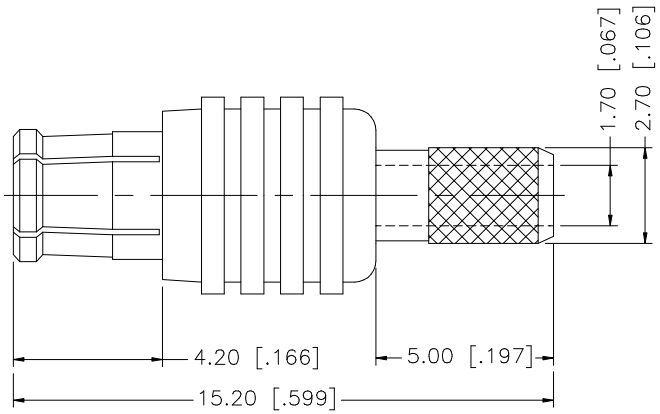

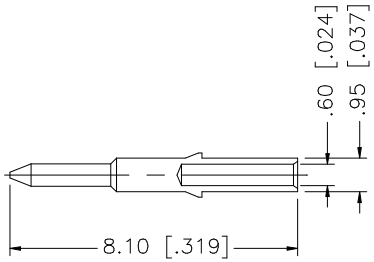

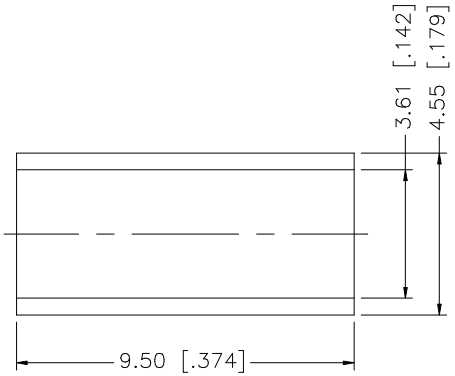

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN SQ. CRIMP SIZE 0.7(Mmm)

8				
7				
6				
5	FERRULE	COPPER	GOLD	1
4	CONTACT PIN	BRASS	GOLD	1
3	INSULATOR	TEFLON	NATURAL	1
2	BODY	BER. COPPER	GOLD	1
1	HOUSING	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	02/15/07
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/252/252121.DWG

Amphenol Connex

PART DESCRIPTION
MCX STRAIGHT CRIMP PLUG – GOLD
(FOR RG–316/U DOUBLE BRAID)

PART NO. 252121

DWG. NO.	REV.	SIZE	SCALE
252121.DWG	D	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

70218-1116LF 86093967896755LF 863013A D15P13A6RV12LF DAPO15S365TLF 68001-108HLF 86093968191755E3LF DCMF37P LD25S33E4GV00LF RJSBE5080C2 68001-200HLF 68002116HLF 69192-408HLF 76384-316LF 54202-G0805CLF 67996-204HLF 95157-140LF DEM09P032N LD15P33E4GV00LF 54202-S08-07LF 65781-158 68000-236HLF 86093488314745V1LF RJE061661210 70234-112LF CD15S13E4RV09LF 86130202123355E1LF 91614-403ALF 70430-164LF 86093968813H45V1LF