




REV.	DATE	DESCRIPTION
NC	04/01/08	INITIAL RELEASE

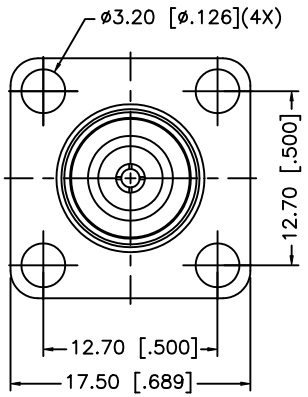


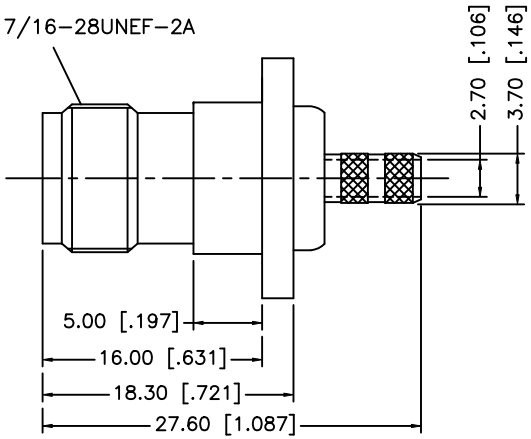



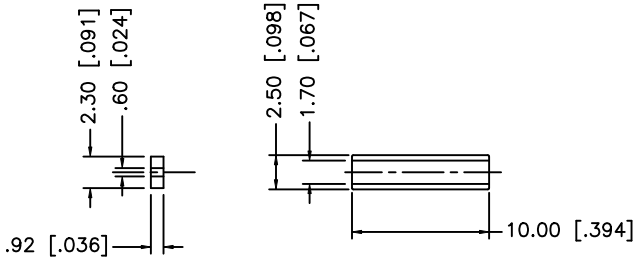

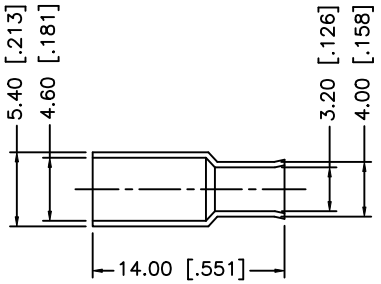

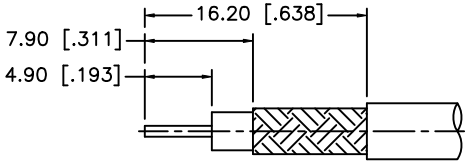

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	FERRULE	BRASS	NICKEL	1
6	SLEEVE	TEFLON	NATURAL	1
5	SPACER	BRASS	NICKEL	1
4	CONTACT PIN	PHOS. BRONZE	GOLD	1
3	BODY	BRASS	NICKEL	1
2	INSULATOR	DELRIN	NATURAL	1
1	HOUSING	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	04/01/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/122/122379.DWG

Amphenol Connex

PART DESCRIPTION
TNC PANEL CRIMP JACK
FOR RG–316 DOUBLE BRAID

PART NO. 122379

DWG. NO.	REV.	SIZE	SCALE
122379.DWG	NC	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

69192-408HLF 70234-112LF RJSBE5080C2 54202-G0805CLF 67996-204HLF 68000-236HLF 68002116HLF 76384-316LF 68001-108HLF 65781-158 86130202123355E1LF DAPO15S365TLF DCMF37P DEM09P032N 70218-1116LF 91614-403ALF 95157-140LF 54202-S08-07LF 86093968813H45V1LF 863013A CD15S13E4RV09LF RJE061661210 70430-164LF 86093488314745V1LF 86093968191755E3LF LD15P33E4GV00LF 68001-200HLF 86093967896755LF D15P13A6RV12LF LD25S33E4GV00LF