



REV.	DATE	DESCRIPTION
NC	06/07/99	INITIAL RELEASE
A	03/20/07	UPDATE DRAWING FORMAT, ADD BODY X-SEC.

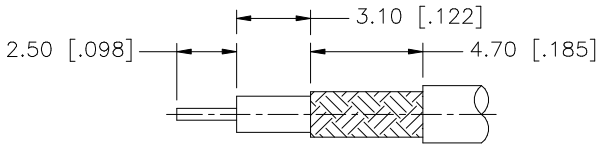

RECOMMENDED
CABLE STRIPPING DIM'S

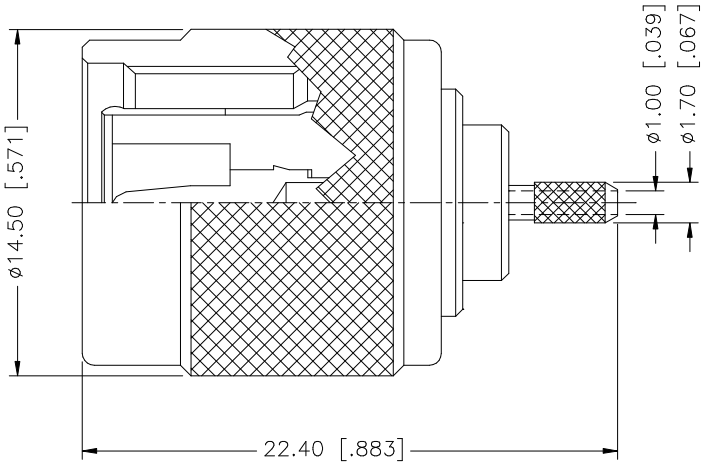





	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	FERRULE	COPPER	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	DELRIN	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/20/07
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/122/122429.DWG

Amphenol Connex

PART DESCRIPTION
TNC CRIMP PLUG
(RG-178B/U, 196A/U CABLE)

PART NO. 122429

DWG. NO.	REV.	SIZE	SCALE
122429.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

65781-158 76384-316LF DAPO15S365TLF 68000-236HLF 69192-408HLF 70234-112LF 863013A DEM09P032N 86093488314745V1LF 86093968813H45V1LF DCMF37P LD15P33E4GV00LF RJE061661210 70218-1116LF 86093968191755E3LF CD15S13E4RV09LF RJSBE5080C2 68001-108HLF 68002116HLF 70430-164LF D15P13A6RV12LF 68001-200HLF 54202-S08-07LF 67996-204HLF 86093967896755LF 91614-403ALF 54202-G0805CLF 86130202123355E1LF 95157-140LF LD25S33E4GV00LF