


REV.	DATE	DESCRIPTION
NC	03/23/99	INITIAL RELEASE
A	05/22/07	UPDATE DRAWING FORMAT
B	09/20/07	REVISE BODY PLATING TO NEXCOTE

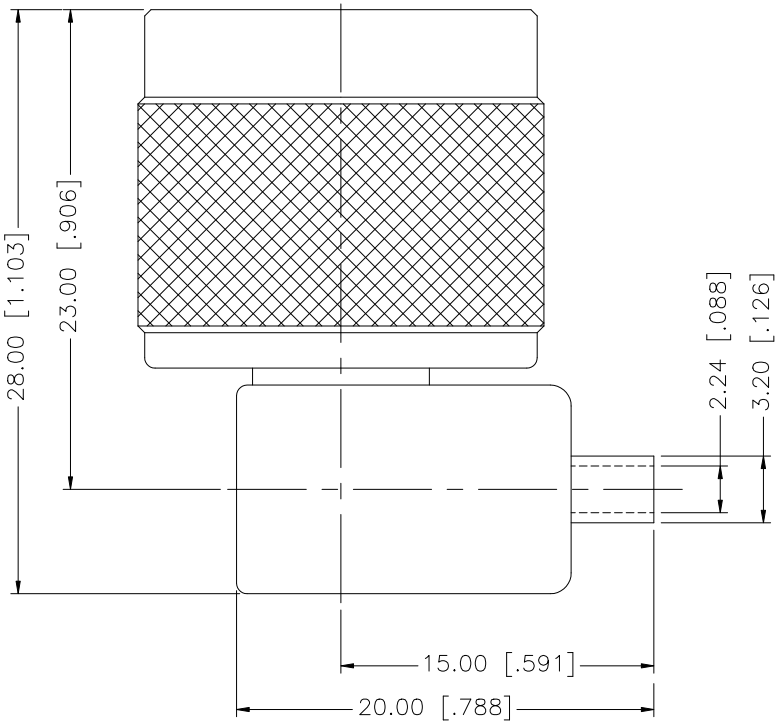



RECOMMENDED
CABLE STRIPPING DIM'S



	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	BARREL	BRASS	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NEXCOTE	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	09/20/07
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/172/172235.DWG

Amphenol Connex

PART DESCRIPTION
N R/A DIRECT SOLDER PLUG
(FOR .085", .086" SEMI RIGID CABLE)

PART NO. 172235

DWG. NO.	REV.	SIZE	SCALE
172235.DWG	B	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

LD25S33E4GV00LF RJSBE5080C2 69192-408HLF 86093488314745V1LF 70218-1116LF 54202-S08-07LF 65781-158 91614-403ALF CD15S13E4RV09LF 76384-316LF 86093967896755LF 67996-204HLF 68001-108HLF 68001-200HLF DAPO15S365TLF DEM09P032N 70234-112LF D15P13A6RV12LF LD15P33E4GV00LF 68000-236HLF 68002116HLF 86093968191755E3LF 86093968813H45V1LF DCMF37P RJE061661210 70430-164LF 54202-G0805CLF 86130202123355E1LF 863013A 95157-140LF