


REV.	DATE	DESCRIPTION
A	04/03/05	UPDATE DRAWING FORMAT

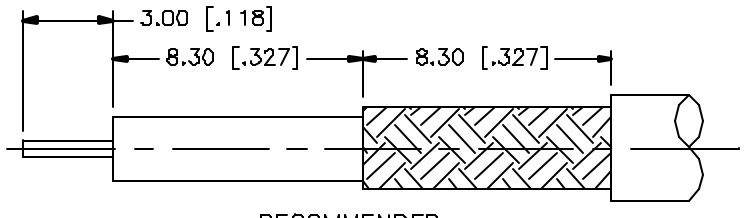

RECOMMENDED
CABLE STRIPPING DIM'S

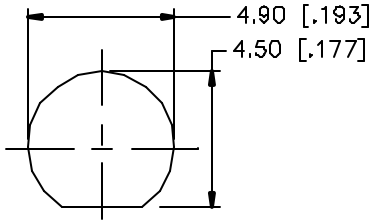

RECOMMENDED
MOUNTING HOLE

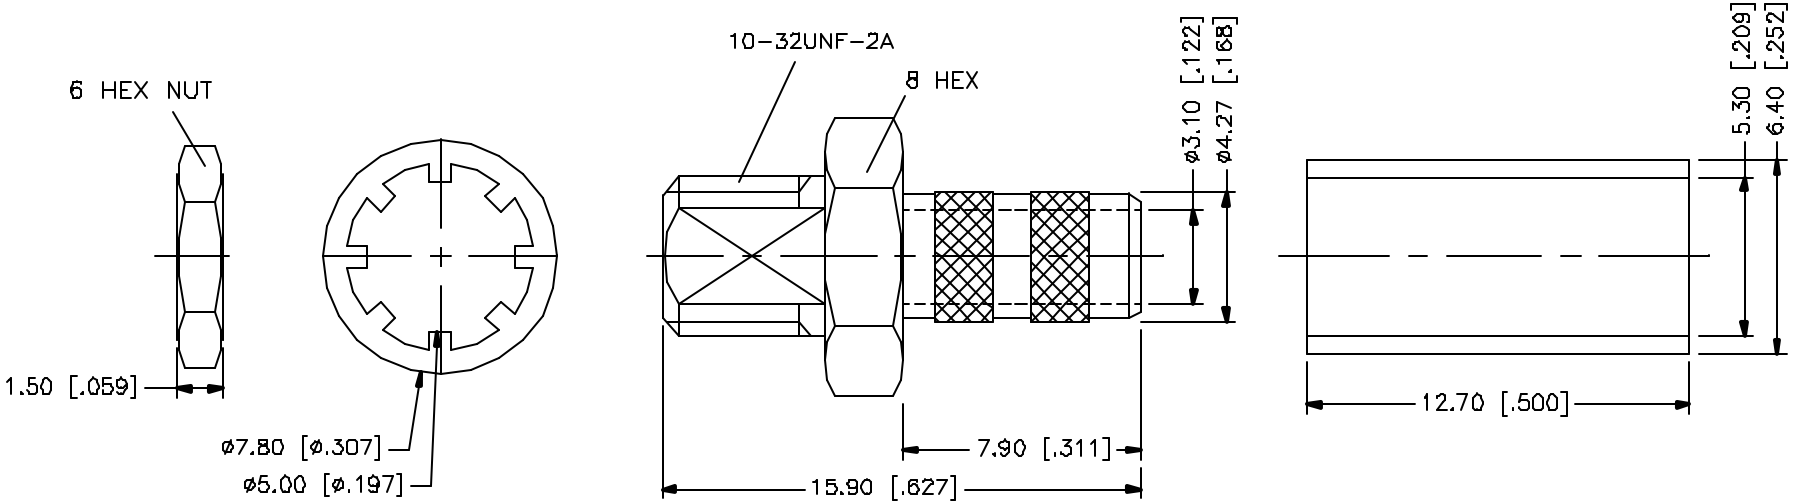

CRIMP NOTES:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .213"

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	FERRULE	COPPER	NICKEL	1
3	HEX NUT	BRASS	NICKEL	1
2	LOCK WASHER	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN C.R.S.	04/03/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/142/2142271.DWG

Amphenol Connex

PART DESCRIPTION
BULKHEAD CABLE TERMINATION
(FOR RG-58C/U, 58/U CABLE)

PART NO. 142271

DWG. NO.	REV.	SIZE	SCALE
142271	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

86093968191755E3LF 86130202123355E1LF DCMF37P LD25S33E4GV00LF 54202-S08-07LF 68000-236HLF 68001-108HLF 68001-200HLF DAPO15S365TLF 70430-164LF 91614-403ALF RJSBE5080C2 54202-G0805CLF 67996-204HLF 86093967896755LF CD15S13E4RV09LF DEM09P032N RJE061661210 LD15P33E4GV00LF 69192-408HLF 70218-1116LF 70234-112LF 65781-158 68002116HLF 95157-140LF 86093488314745V1LF 863013A D15P13A6RV12LF 86093968813H45V1LF 76384-316LF