


REV.	DATE	DESCRIPTION
NC	08/28/98	INITIAL RELEASE
A	07/20/05	UPDATE DRAWING FORMAT



RECOMMENDED CABLE
STRIPPING DIMENSIONS

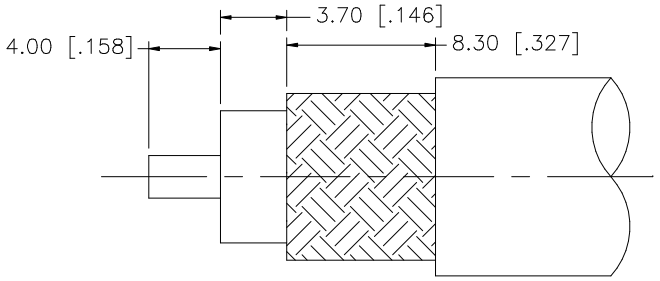

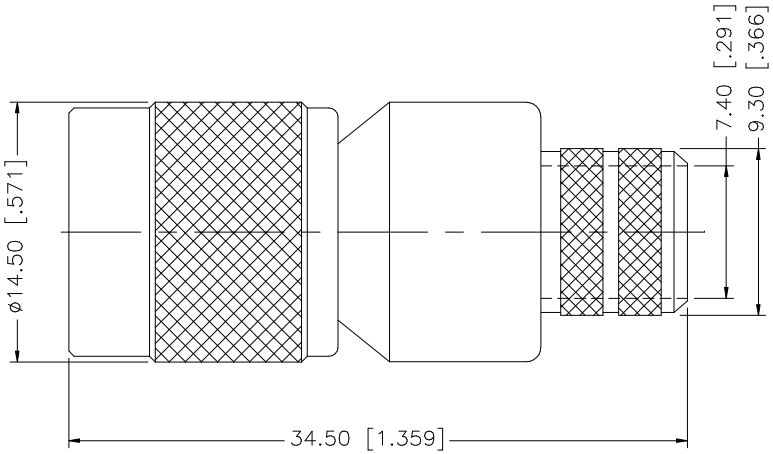

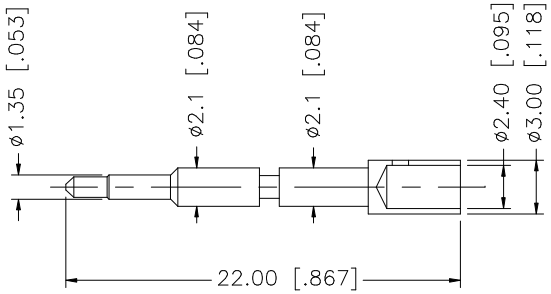

CRIMP NOTES:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
   HEX CRIMP SIZE .100"

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	FERRULE	BRASS	NICKEL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	07/20/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/122/122398.DWG

Amphenol Connex

PART DESCRIPTION
TNC CRIMP PLUG
(FOR 214/U CABLE)

PART NO. 122398

DWG. NO.	REV.	SIZE	SCALE
122398.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

68002116HLF 95157-140LF LD15P33E4GV00LF 54202-G0805CLF 69192-408HLF 76384-316LF DAPO15S365TLF DEM09P032N 54202-S08-07LF 65781-158 70234-112LF 86093968191755E3LF 86093488314745V1LF 91614-403ALF RJSBE5080C2 67996-204HLF 68001-200HLF D15P13A6RV12LF DCMF37P RJE061661210 68001-108HLF 70218-1116LF 863013A LD25S33E4GV00LF 68000-236HLF 70430-164LF 86093967896755LF 86130202123355E1LF 86093968813H45V1LF CD15S13E4RV09LF