
Toggle Switch | **TD2-1F-DC-3-H**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

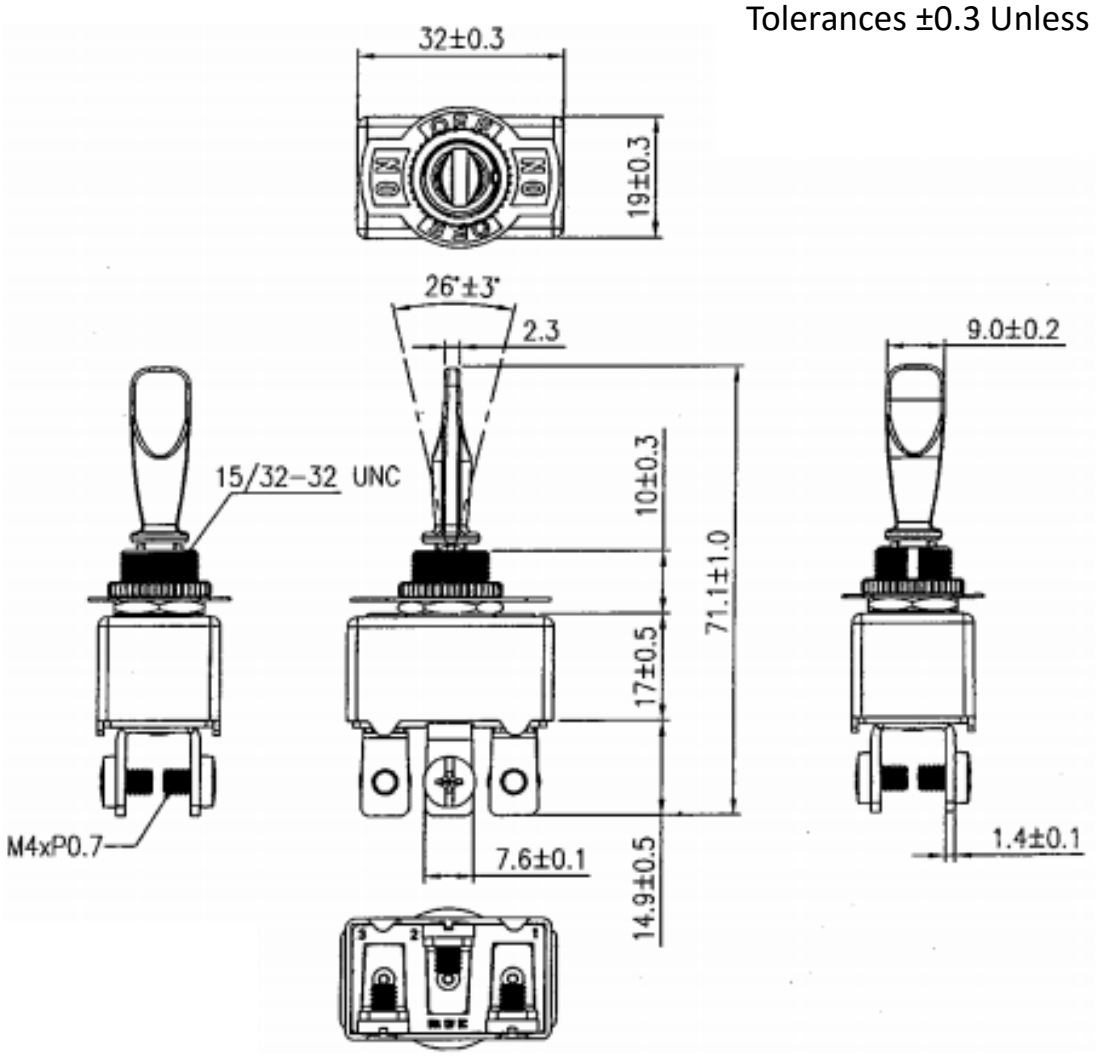

Mounting Hole

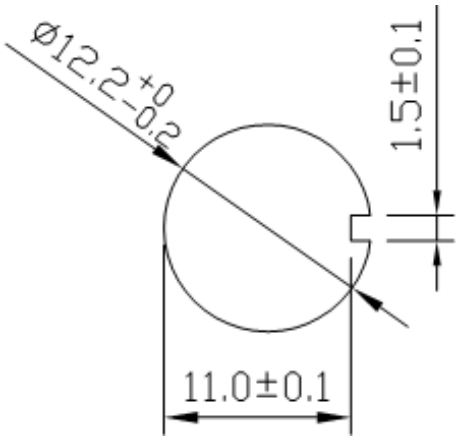

Thickness: 3mm max

Circuit Diagram

3P SPDT ON-OFF-ON



Electrical Specifications

Rating	50A 12V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 500V 1 minute

Material Specifications

Frame	Zn alloy
Actuator	Ni-plating, Zn alloy

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RC-1A-DC-1-AL SRD1-2A-DC-1-BGN SRD2-2F-DC-1-RNN TA2-1G-DC-6-O TE6-1A-DC-1-UL
RG3-1A-DC-1-B TA1-1A-DC-4 TA2-1A-DC-5 TE6-1A-DC-1-AL SRD2-1G-DC-1-BNN TC6-P1-Z
TE3-1A-DC-1-AL SB-1B-DC-3-R SC-B PB-1A-DC-2-B PB-1A-DC-2-RDL RD2-1A-DC-1-AL
RF1-1A-DC-2-B-3 SB-1B-DC-3-B SRB1-1G-DC-1-NN SRD2-2F-DC-1-BNN TA1-1F-DC-4 TB2-2H-DC-1
SRC1-1B-DC-1-B PD-1E-DC-9-UL TB1-2H-DC-6 TE1-1F-DC-1-PB WR1 RA4-2A-DC-2-AL PB-1B-DC-2-RIL