




MAPX	MODIFICATION	DATE

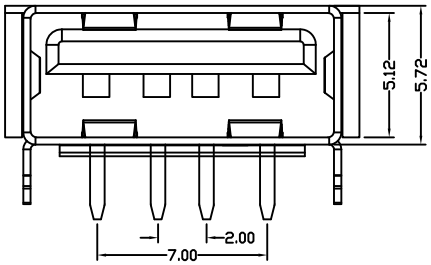





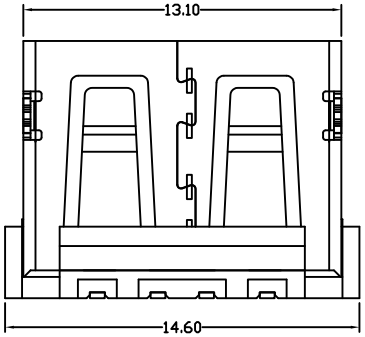



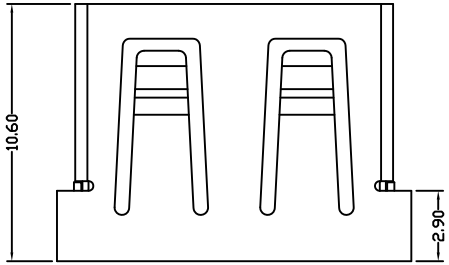

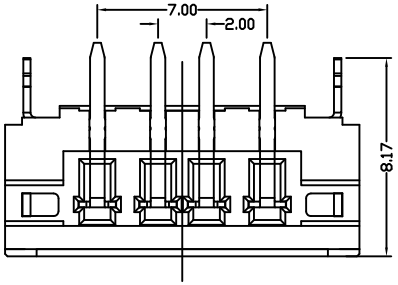

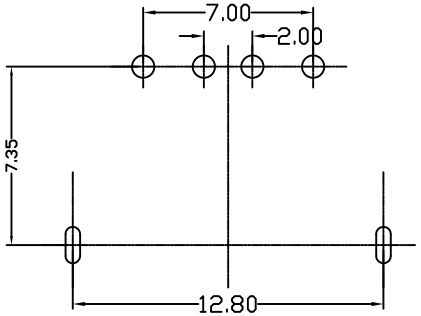

PCB HOLES

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ\Min.

Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;

Shell: Bronze, C2680R-H =0.30mm

Plating: Nickel underplate 2.54 um Min;

Housing: LCP Black

4.Environmental:

Operating Temperature: 0°C to +85°C.

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.15	X.	±5.°
.X	±0.10	.X	±2.°
.XX	±0.05	.XX	±1.°
.XXX	±0.03	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	914-222A1011D10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.6苹果款两脚鱼叉方弹铜壳白胶偏蓝DIP
日期 DATE	2011.09.02	核准 APPD		角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

905-761A2032S10200 910-151A2021D10100 918-418K2022Y40011 920-A62A2021S10108
920-154A2021Y10110 906-262A1021D10200 916-151A1022Y10200 904-232B2032S10100
904-331B2032S10200 911-221A2021S10100 912-112A2021S10100 912-312A1012D10100
917-B88C201AH70201 918-415K3028S40000 920-C62A2021S10103 904-232A2031S10100
906-552A1012D10200 918-468K2029Y50000 919-162A1012D10400 907-111A1022D10200
912-112A1011D10100 918-318K2023C40005 908-351A1011D10100 920-A62A2021S10104
920-F52A2021S10105 920-A64A2091S101A3 920-C52A2021S10105 906-752B1114D10200
907-312A1101Y10210 917-P81A202ES60201