




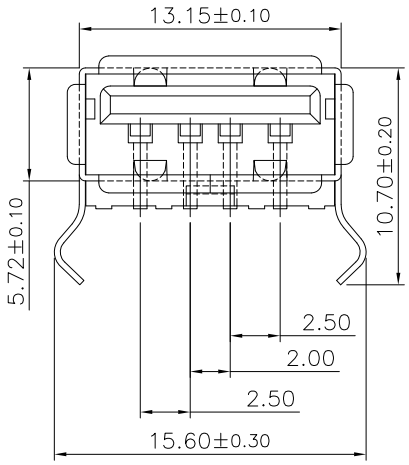

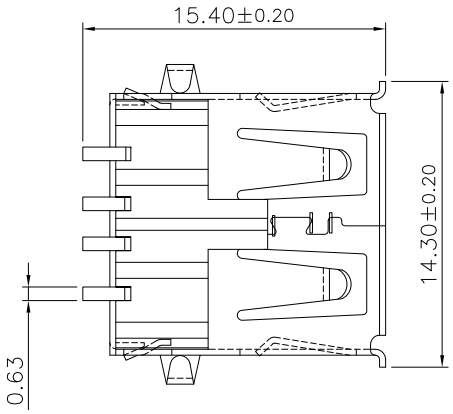

Specifications:
Current Rating:1.5A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:30m ohm. Max.
Insulation Resistance:1,000M ohm. min.
Withstanding Voltage:500V AC For One Minute
Operating Temperature Range:−40°C ~ +105°C

Material and Finish
Insulator:LCP (UL94V−0)
Insulator Color:Black
Contact:Brass
Plating:30u" Gold Plated on Contact Area
Tin Plated on Solder Tail.
Shell:Brass,Nickel Plated

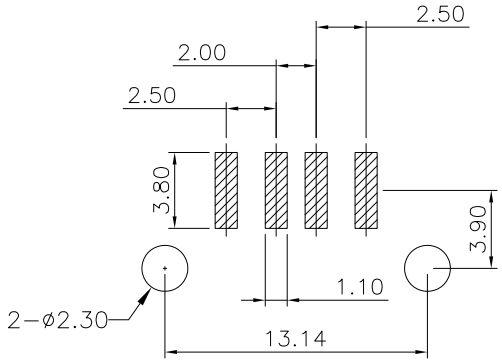

PCB layout

RoHS Compliant

REV	DATE	FILE	BY

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:
.X=±0.20 X°.=±5°
.XX=±0.10 .X°=±3°

UNIT: MM

SCALE:1:1

SHEET: 1 / 2


PROJECTION:


CnC Tech
Industrial Cable and Connector Technology


DESCRIPTION:
USB A TYPE SMD W/KINK TYPE, 30 u"

PART NO:
1002-002-01100-TR


SIZE
A4

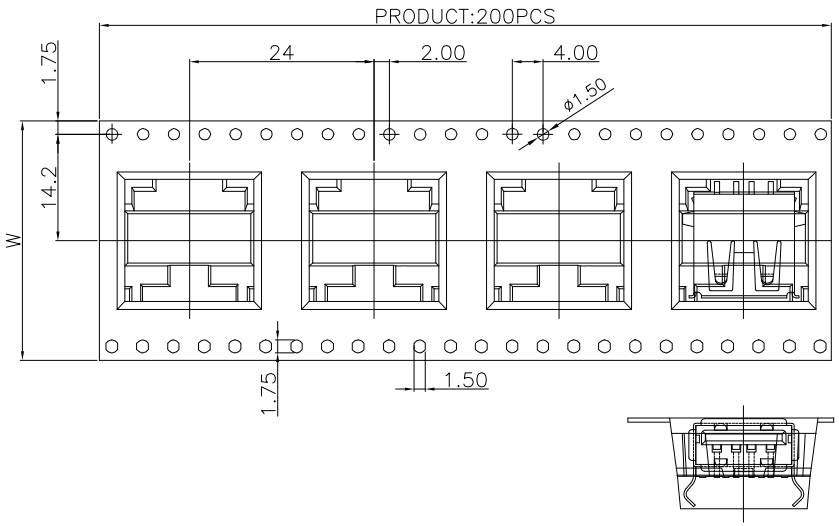







Note:
1.Dimension:
Carton Size:350X350X296 (mm)
2.Quqntity:
200 Pcs/R
7 R/Carton
Q'TY: 1400pcs

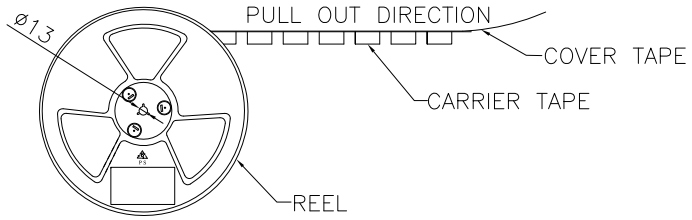



Pin. NO	W	Pcs/R	R/Carton	Q'TY
04	32	200	7	1400



7/Reel

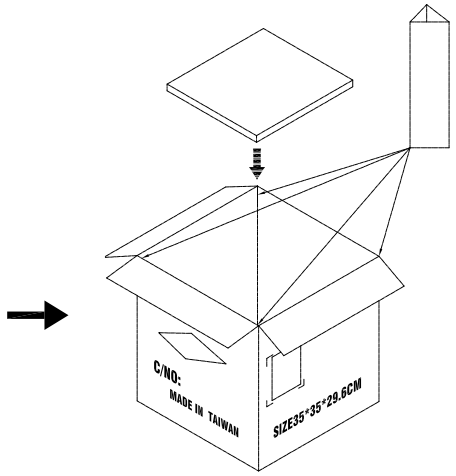



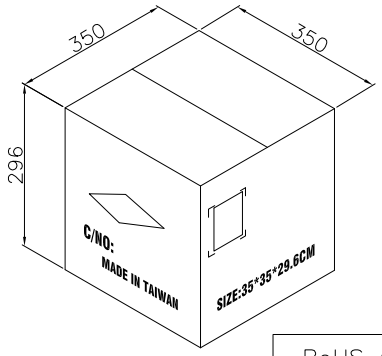

Carton

RoHS Compliant

REV	DATE	FILE	BY

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:
.X=±0.20 X°.=±5°
.XX=±0.10 .X°=±3°

UNIT: MM

SCALE:1:1

SHEET: 2 / 2

PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION:
USB A TYPE SMD W/KINK TYPE, 30 u"

PART NO:
1002-002-01100-TR

SIZE
A4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

3521-08-0101-99 3522-20-0100-99 520-26-4400-SV-0010F 512-26-8800-BL-0007F 521-26-04-SV-014F
3135-18-1-0500-005-1-TS 3239-16-1-0500-005-1-TS CNC-SAE-16-183-002 10064-30-1-0500-007-1-TS
1007-20-1-2000-007-1-TS 102-1030-BE-00100 1002-003-02000 1569-18-1-0500-008-1-TS
1569-22-1-0500-007-1-TS 3132-24-1-0500-002-1-TS 3135-18-1-0500-003-1-TS 3239-20-1-0500-002-1-TS
1332-22-1-0500-001-1-TS 302-28-26-GR-0100F 3221-26-0300-00 743-60010-00200
1007-18-1-2000-007-1-TD 3122-18-1-0500-002-1-TS 3132-22-1-0500-001-1-TS 51025-10-0100-01
521-26-04-SV-005F 523-26-6600-SV-0010F 911S-2-5-00700-PL 1569-22-1-0500-006-1-TS
2000-1-2-41-00-BK