




RoHS

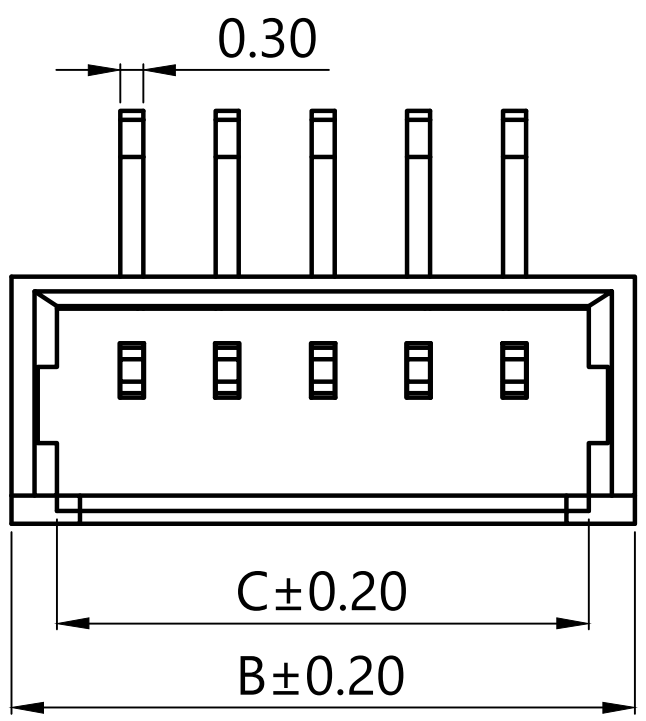


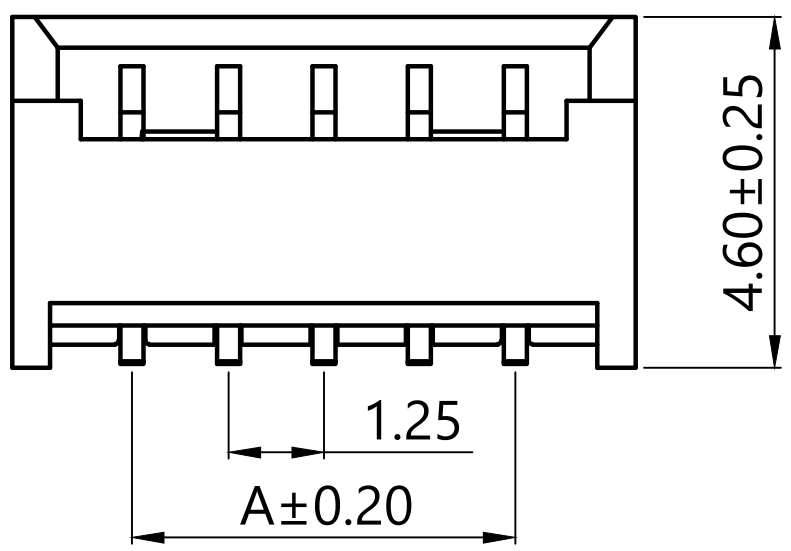


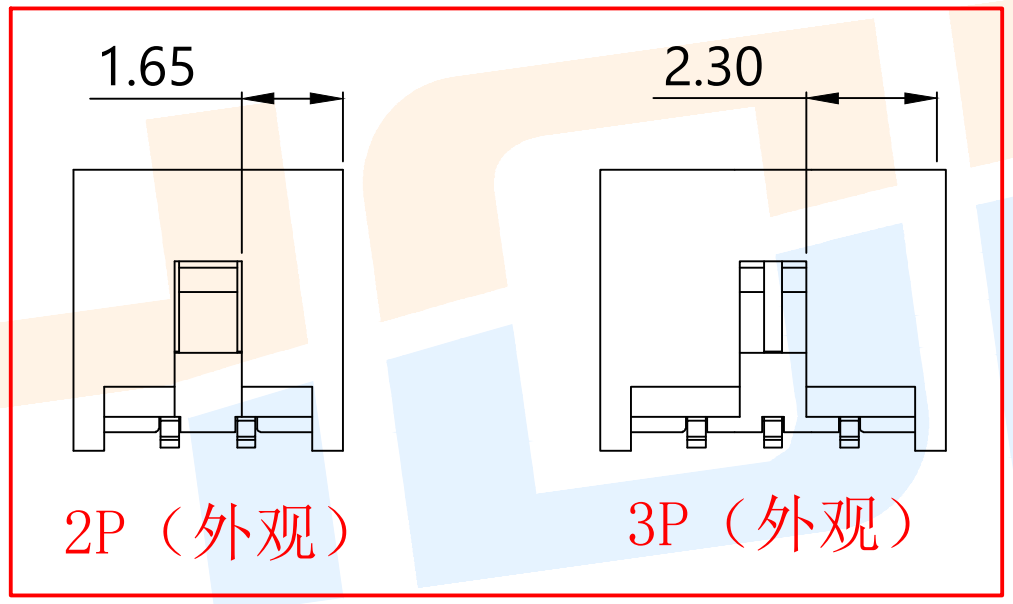

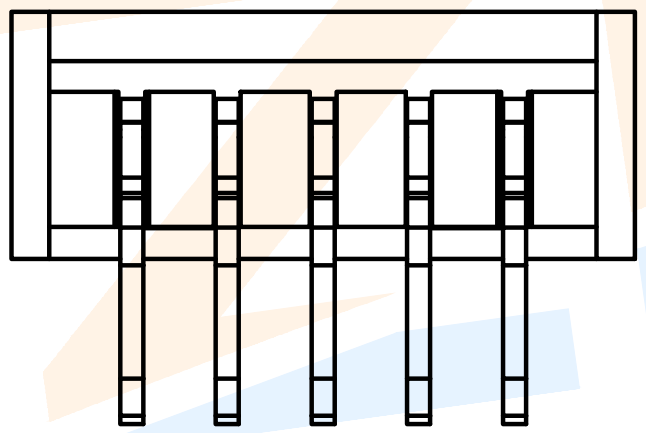


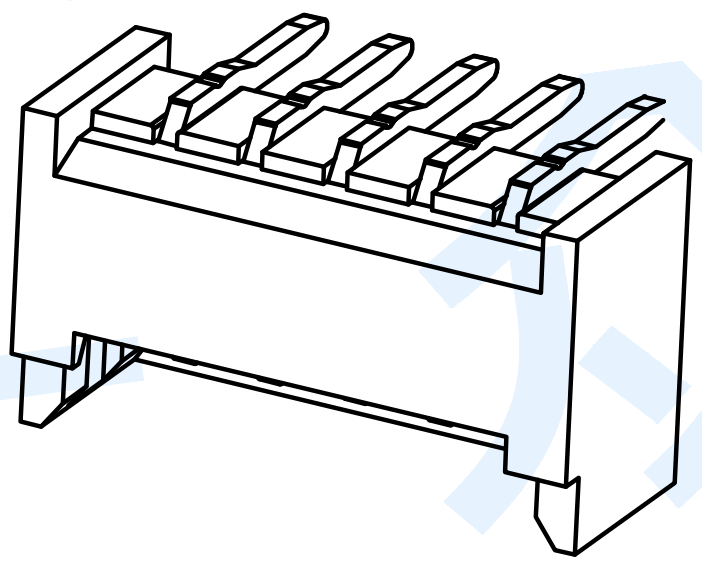


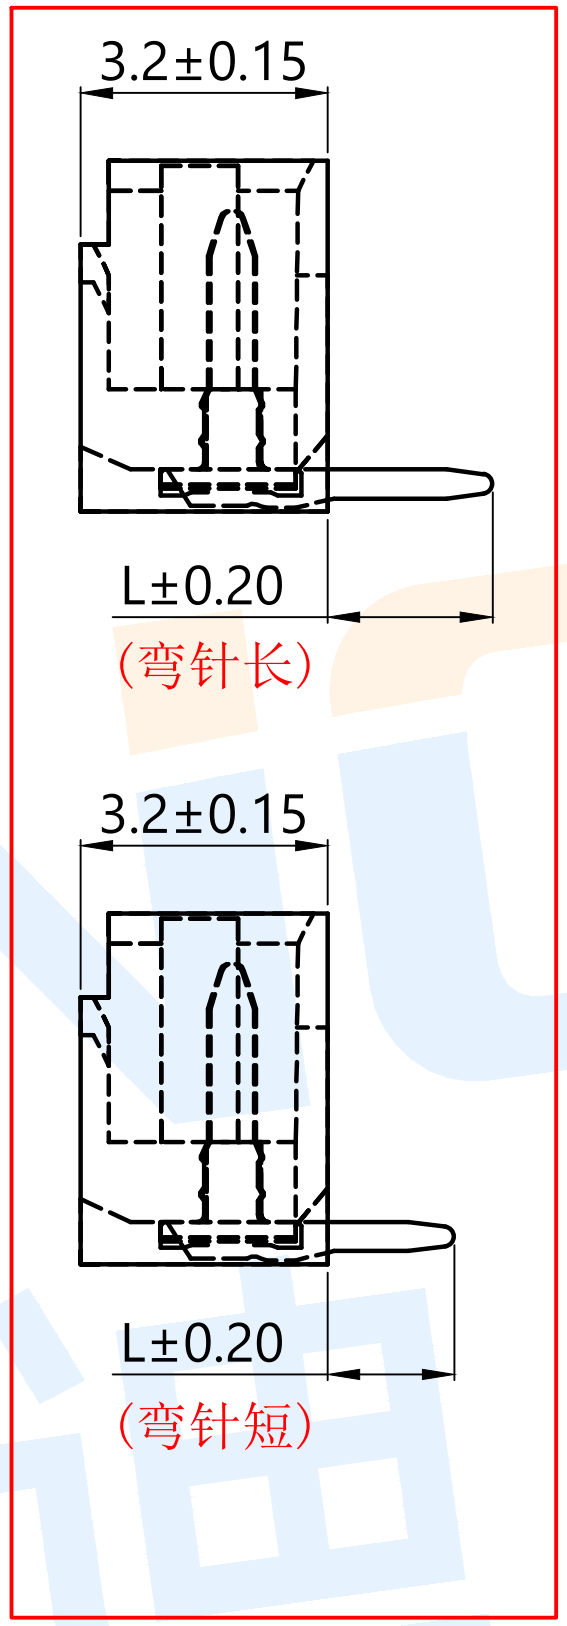

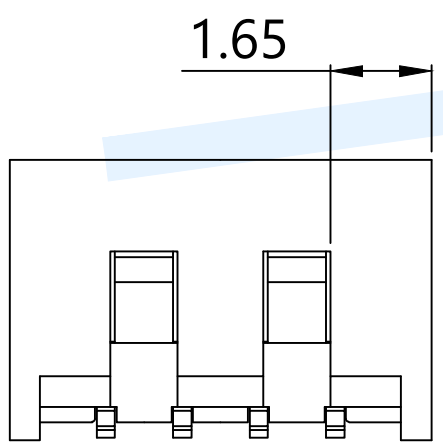

4P～20P（外观随孔位递进自然变化）

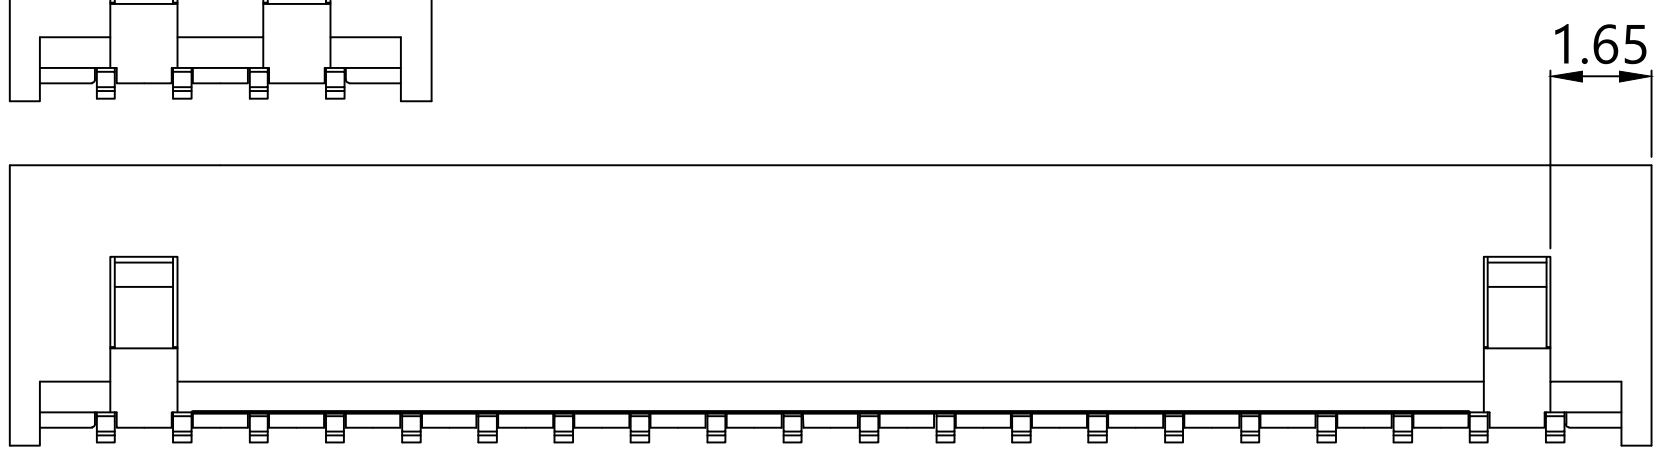

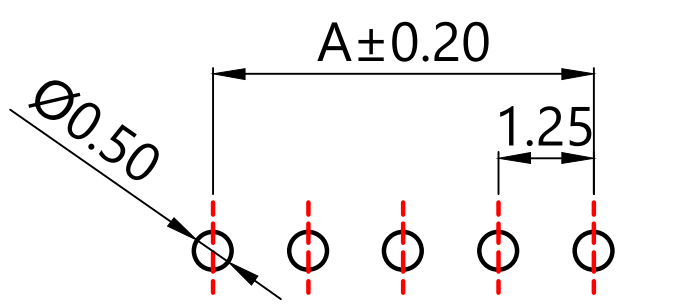

适用线路板(PCB LAYOUT)

Curved needle length	
Code	L
C15	1.5
C22	2.2

Model No.	Pin	A	B	C
WAFER–MX1.25–2PWZ–C□□–9T	2	1.25	4.45	3.20
WAFER–MX1.25–3PWZ–C□□–9T	3	2.50	5.70	4.45
WAFER–MX1.25–4PWZ–C□□–9T	4	3.75	6.95	5.70
WAFER–MX1.25–5PWZ–C□□–9T	5	5.00	8.20	6.95
WAFER–MX1.25–6PWZ–C□□–9T	6	6.25	9.45	8.20
WAFER–MX1.25–7PWZ–C□□–9T	7	7.50	10.70	9.45
WAFER–MX1.25–8PWZ–C□□–9T	8	8.75	11.85	10.70
WAFER–MX1.25–9PWZ–C□□–9T	9	10.00	13.20	11.85
WAFER–MX1.25–10PWZ–C□□–9T	10	11.25	14.35	13.20
WAFER–MX1.25–11PWZ–C□□–9T	11	12.50	15.70	14.35
WAFER–MX1.25–12PWZ–C□□–9T	12	13.75	16.95	15.70
WAFER–MX1.25–13PWZ–C□□–9T	13	15.00	18.20	16.95
WAFER–MX1.25–14PWZ–C□□–9T	14	16.25	19.45	18.20
WAFER–MX1.25–15PWZ–C□□–9T	15	17.50	20.70	19.45
WAFER–MX1.25–16PWZ–C□□–9T	16	18.75	21.95	20.70
WAFER–MX1.25–17PWZ–C□□–9T	17	20.00	23.20	21.95
WAFER–MX1.25–18PWZ–C□□–9T	18	21.25	24.45	23.20
WAFER–MX1.25–19PWZ–C□□–9T	19	22.50	25.70	24.45
WAFER–MX1.25–20PWZ–C□□–9T	20	23.75	26.95	25.70

Specifications/技术规格:

1.Poles/线数：2～20P
2.Wire range/适用线规：AWG 32#～28#
3.Applicable PC board thickness/适用PC板厚度：0.6～1.2mm
4.Current rating/额定电流：1.0A
5.Voltage rating/额定电压：125V DC/AC
6.Insulation Resistance/绝缘电阻：100MΩ Min
7.Dielectric Withstanding/ 耐电压：500V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	PA9T	Off White

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

angle	±2°	design		date		name	WAFER CONNECTOR
10~30	±0.30	Review		date			
5~10	±0.20	Approved		date		model	WAFER–MX1.25–□□PWZ–C□□–9T
~ 5	±0.10	Drawing number:					
Tolerance not specified		Proportion	1:1	unit	mm	gape number	A4

modify	Review	Approved

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-MX1.25-5PLT-W1-P WAFER-SHB1.0-13PLT-W1-P WAFER-ZH1.5-12PWT-W1-P
WAFER-ZH1.5-2PLT-W1-P WAFER-ZH1.5-2PWT-W1-P WAFER-PH2.0-2PWT-W1-P
WAFER-SH1.0-6PWT-W1-P WAFER-SUR0.8-12PWT-W1-P WAFER-GH1.25-12PLT-W1-P
WAFER-HY2.0-10PWT-W1-P WAFER-TJC8-2.54-2PWZ WAFER-SH1.0-8PWT-W1-P
WAFER-SHB1.0-8PWT-W1-P WAFER-VH3.96-5PWT-W1-P WAFER-HY2.0-6PLT-W1-P
WAFER-SH1.0-11PLT-W1-P WAFER-SUR0.8-4PLT-W1-P WAFER-XH2.54-12PWT-W1-P
WAFER-GH1.25-14PWT-W1-P WAFER-SUR0.8-14PWT-W1-P WAFER-XHB2.54-7PWT-W1-P
WAFER-HY2.0-7PWT-W1-P WAFER-MX1.25-5PZZ-C22-9T WAFER-TJC8-2.54-12PZZ
WAFER-VH3.96-3PWT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-HY2.0-6PWT-W1-P
WAFER-MX1.25-2PWZ-C22-9T WAFER-MX1.25-4PWZ-C22-9T WAFER-ZH1.5-4PLT-W1-P