100Base-TX PulseJack™ Integrated SMD Connector

Rugged latch-up design for industrial and outdoor use

Pulse
a YAGEO company



Features and Benefits:

- *Fully compliant to IEEE802.3.u for 100Base-TX*
- *Compatible with market leading PHYs*
- *Rugged design for outdoor and industrial use*
- *Fully RoHS and lead free compliant*
- *Supplied in tray or tape and reel*
- *Peak reflow solder temperature 245°C*

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C

Part Number*	Inductance 100kHz, 0.1mA - across pins shown	LED Configuration (L/R)	EMI Fingers Configuration	IC Design Style	Isolation (Pri:Sec)
JXD6-0001NL	350uH @ 8mA (4-5), (6-7)	Green/Yellow	None	AUTOMDIX	2250VDC / 60sec
JXD6-0002NL	350uH @ 8mA (3-5), (6-8)	Green/Green	Top and Side	AUTOMDIX	2250VDC / 60sec
JXD6-0003NL	350uH @ 8mA (4-5), (6-7)	Green/Yellow	Top and Side	AUTOMDIX	2250VDC / 60sec

* Component marking will not include the "**T**" as that denotes product to be shipped in Tape and Reel - see page 4 for details

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C


Part Number	Insertion Loss (Max)	Return Loss (dB MIN) 100Ω (±15Ω)			Cross Talk (dB TYP)			Common Mode Rejection (dB TYP)	
	1-100 MHz	1-30 MHz	30-60 MHz	60-80 MHz	1 MHz	30-60 MHz	100 MHz	1-30 MHz	30-100 MHz
JXD6-0001NL	-1.2dB	-16dB	-12dB	-10dB	-40dB	-35dB	-30dB	-30dB	-30dB
JXD6-0002NL	-1.2dB	-16dB	-12dB	-10dB	-40dB	-35dB	-30dB	-30dB	-30dB
JXD6-0003NL	-1.2dB	-16dB	-12dB	-1dB	-40dB	-35dB	-30dB	-30dB	-30dB

Notes:

1. ROHS Compliant:
2. Plastic housing: thermoplastic material with flammability rating UL 94V-0 or better
3. Contacts plating: 6 micro-inch gold plating
4. Contacts base material: Phosphor bronze
5. Under plating: 30 micro-inch min nickel
6. Solder Tail Plating: 100 micro-inch (min), inches 100% tin, matte finish
7. Metal shield nickel plating on Copper Alloy
8. Jack cavity conforms to FCC part 68 subpart
9. PCB plating: HASL
10. Storage temperature: -40°C to +85°C
11. Compliance to J-STD:
    - A. J-STD-002: solderabilitiy at 245°C DIP and LOOK test
    - B. J-STD-020: level 1, no moisture sensitive
    - C. J-STD-075: R7, 245°C maximum through Reflow Solder
12. Parts are shipped in either trays of 50 pcs or full reels - see page 4 for details


MECHANICALS

JXD6-000XNL

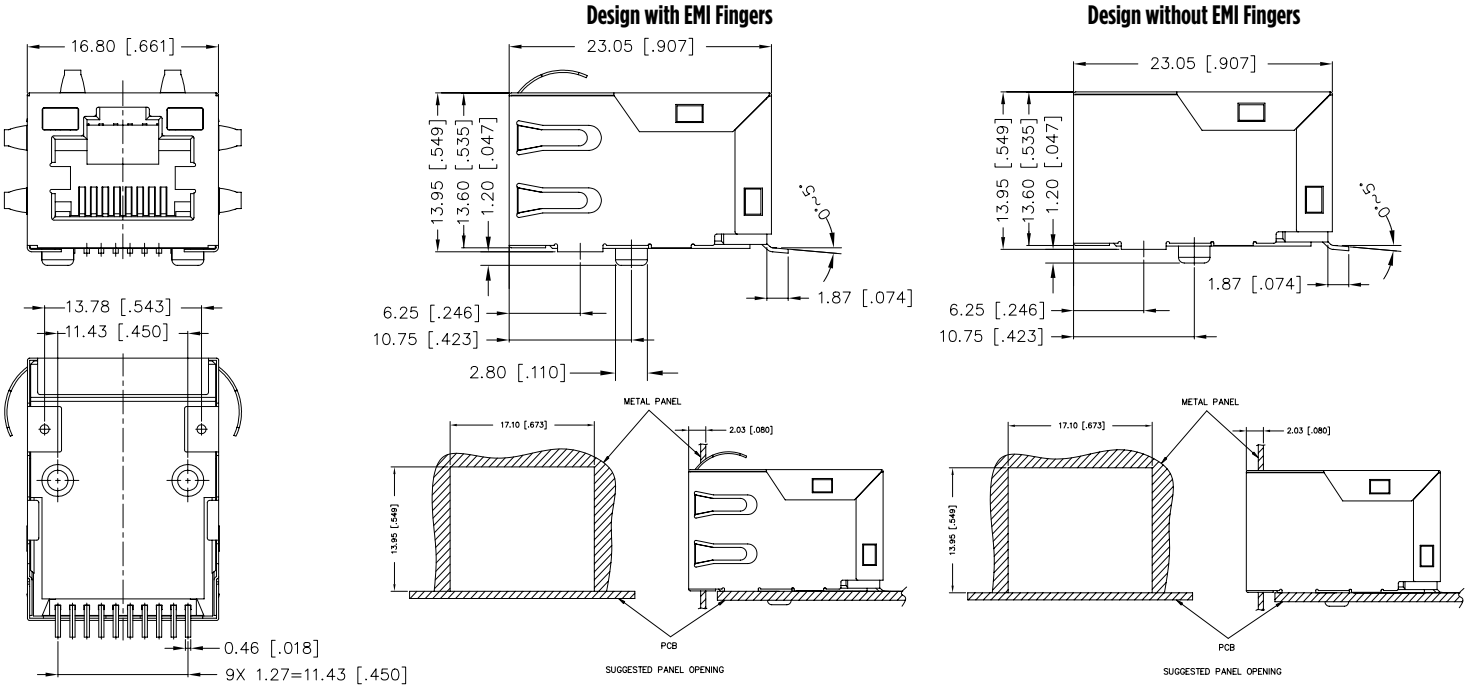

Dimensions:
Unless otherwise specified,
all tolerances are ± 0,25

RECOMMENDED FOOTPRINT

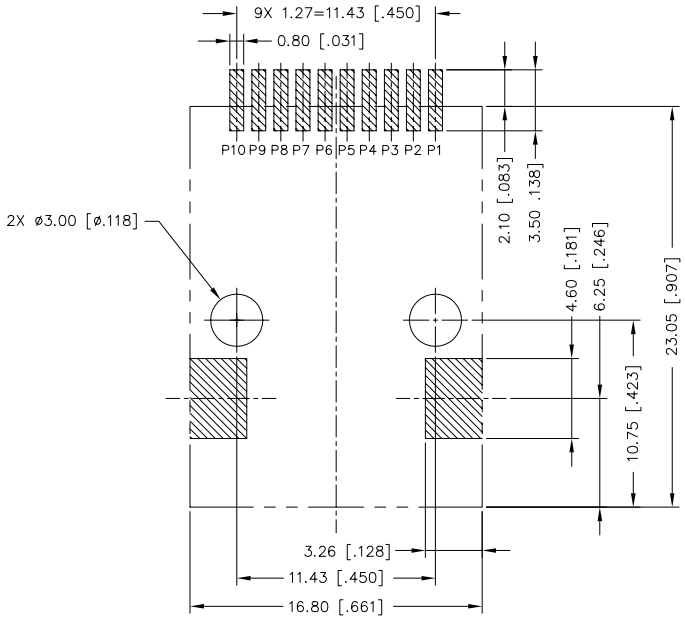


SUGGESTED FOOTPRINT (COMPONENT SIDE SHOWN)

Dimensions:
Unless otherwise specified,
all tolerances are ± 0,25

SCHEMATICS

JXD6-0001NL, JXD6-0003NL

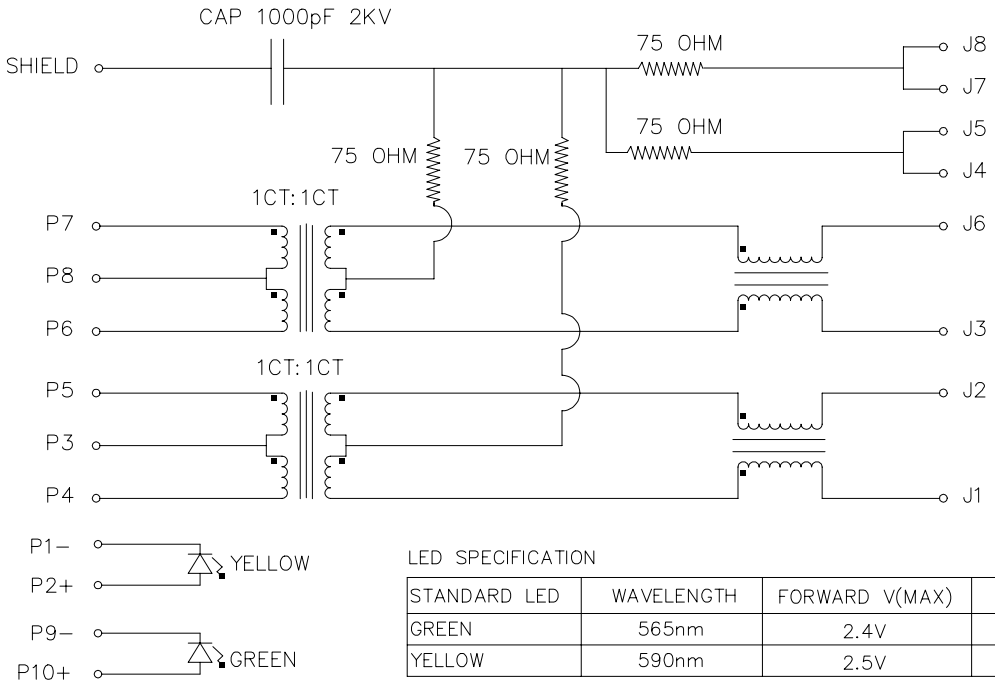


LED SPECIFICATION

STANDARD LED	WAVELENGTH	FORWARD V(MAX)	TYP
GREEN	565nm	2.4V	2.2V
YELLOW	590nm	2.5V	2.1V

*WITH A FORWARD CURRENT OF 20mA

JXD6-0002NL

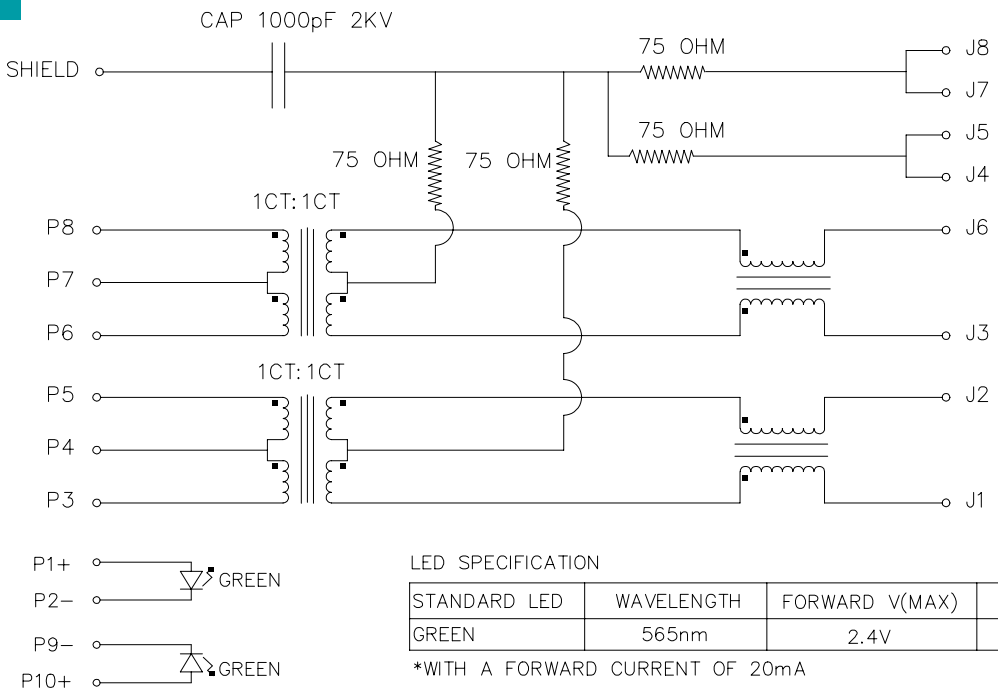

LED SPECIFICATION

STANDARD LED	WAVELENGTH	FORWARD V(MAX)	TYP
GREEN	565nm	2.4V	2.2V


*WITH A FORWARD CURRENT OF 20mA


100Base-TX PulseJack™
Integrated SMD Connector

Rugged latch-up design for industrial and outdoor use


PACKING SPECS - TAPE and REEL

JXD6-000xNLT

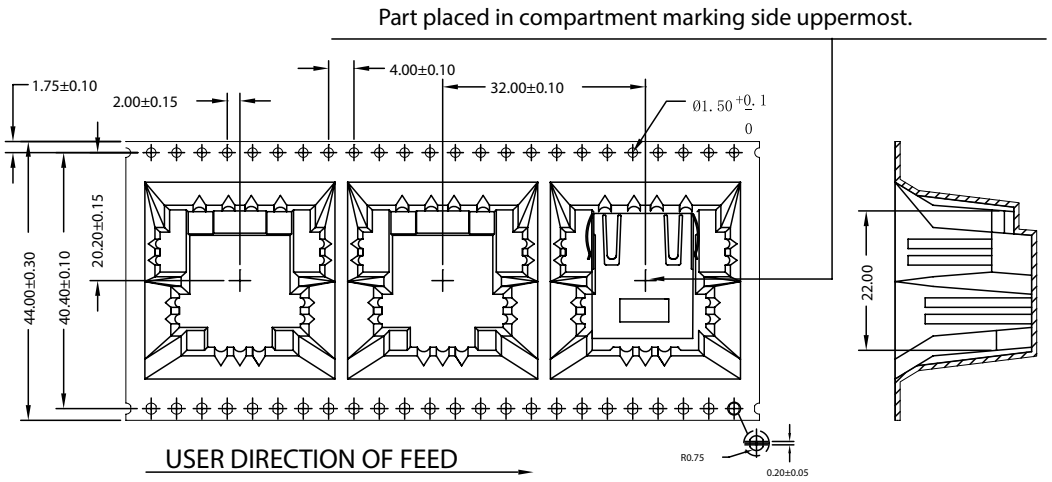

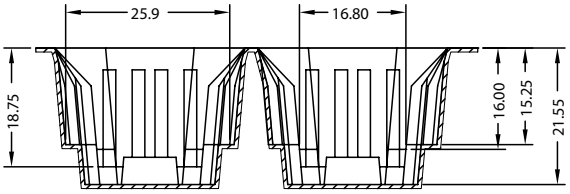

Dimensions: given in mm
Unless otherwise specified, all tolerances are ±0.15

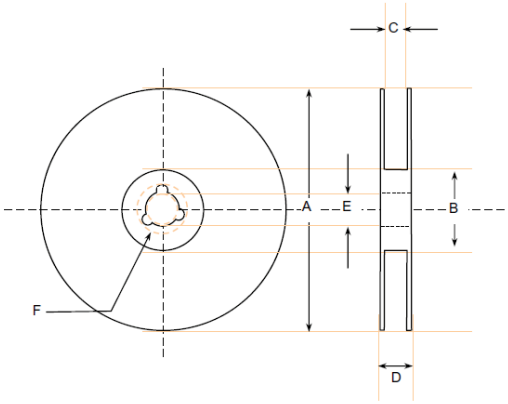

REEL SPECIFICATION in mm

A = Ø 360.0 ±/-2.0	C = Ø 45.4 ±/-1.0	C = Ø 13.1 ±/-0.3
B = Ø 100.0 ±/-0.5	D = Ø 50.4 ±/-1.0	D = Ø 21.0 ±/-0.5

PACKING SPECIFICATION:

JXD6-0001NLT = TAPE and REEL .....110 parts/reel
JXD6-0002NLT = TAPE and REEL .....86 parts/reel
JXD6-0003NLT = TAPE and REEL 86parts/reel

5x Reels = 550/430 Parts in an Export Carton

For More Information:

Americas - prodinfo_network_americas@yageo.com | **Europe -** prodinfo_network_emea@yageo.com | **Asia -** prodinfo_network_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2023. Pulse Electronics, Inc. All rights reserved.

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Pulse Electronics:

AWCS0012070736NJ00 DPX1608LKF3R2460A PA4341.301NLT BBUP00201209121Y00 BSPQ000603043N0B00 JXD2-0Z10NL PA4343.361NLT PG2290.151HLT PA2744NL W3334B0150 PA4343.451NLT PAT6261.003NLT ANT1204F007R0870A BSPQ000603041N4B00 P0585NL PA0369NL PE-68386NLT W1902 BDHE002520122R2MQ1 E5J88-032-02-L PA4341.221NLT PD617-6000M243 PGL6395.121HLT PA4320.104NLT PA4320.334NLT PE-67100NL W1093 W3078 JXD0-2015NL PD380-4000S1NF