Track rollers LR5202-X-2Z-TVH-XL (Series LR52)

double row, sealed on both sides

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	15	mm	
D	40	mm	
C	15,9	mm	
d_2	21	mm	
r_{min}	0,6	mm	
m	0,11	kg	Mass
C_{rw}	10800	N	Effective dynamic load rating as track roller (radial)
C_{0rw}	7500	N	Effective static load rating as track roller (radial)
F_{rper}	7500	N	Permissible dynamic radial load
C_{urw}	385	N	Fatigue limit load
n_{DG}	10200	1/min	Speed (with continuous operation and grease lubrication)
			Track roller with cylindrical outside surface

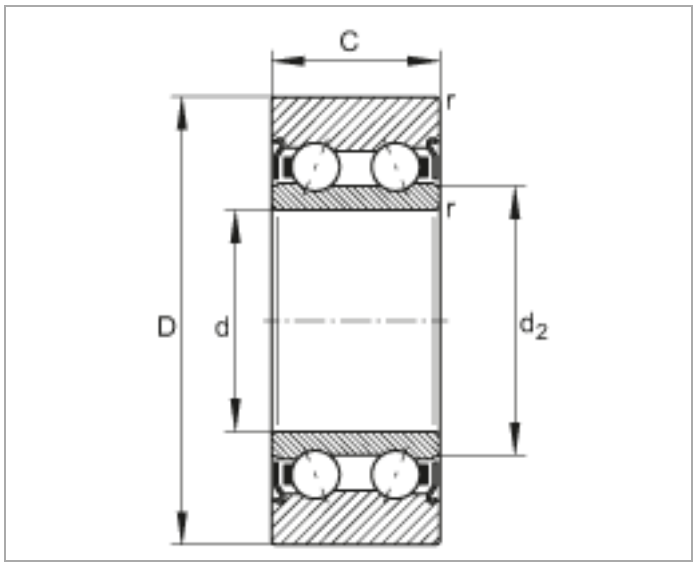
C
r
r
D
d
d_2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

INA:

KWVE25-B-V2-G3 NATV15-PP-A NKIA59/22-XL NKIB5902-XL PNA20/42-XL RAE30-XL-NPP-FA106
GE40-FO-2RS KB16-PP-AS KB40-PP-AS KR5207-2RS NKXR30-XL RME60-XL-N#N1>1 TME50-XL-N
GE35-DO-2RS GE40-UK-2RS-A KRE52-PP-A LR203-X-2RSR NUKR35-X-A PCJT40-XL-N
HK20202RSL271 IR17X22X14-IS1-OF-XL IR7X10X12-XL GE6-UK NA4907-2RSR-XL RCJY40-XL-N
NA2200-2RSR GE50-UK-2RS-A KH10PP GE50-DO-2RS KH06-PP