


Technical Data Sheet

STRAIGHT PLUG CLAMP TYPE CABLE 5/50 S


PAGE **1/2**	ISSUE **1446 V**	SERIES **BNC-HT / MHV**	PART NUMBER **R316007000**

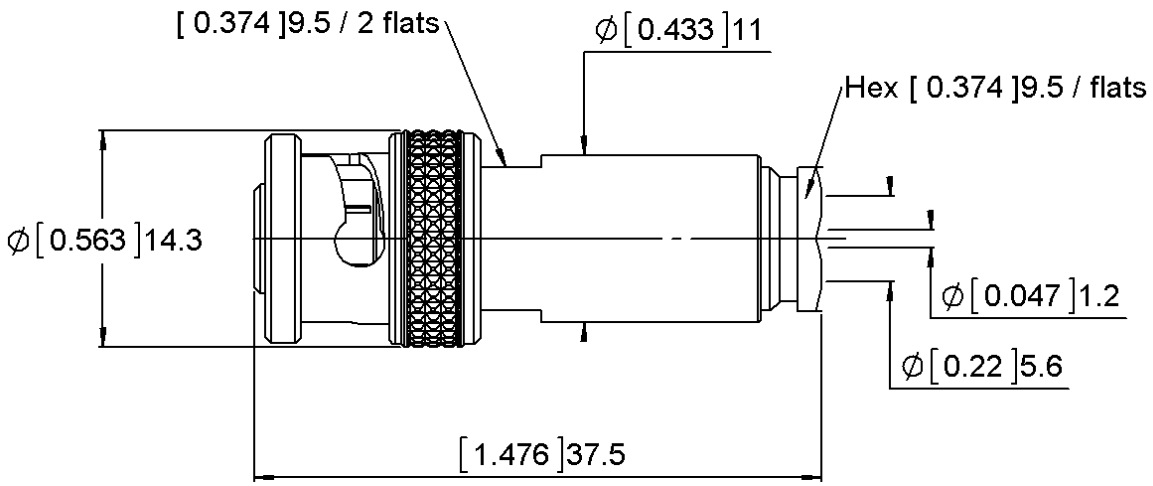

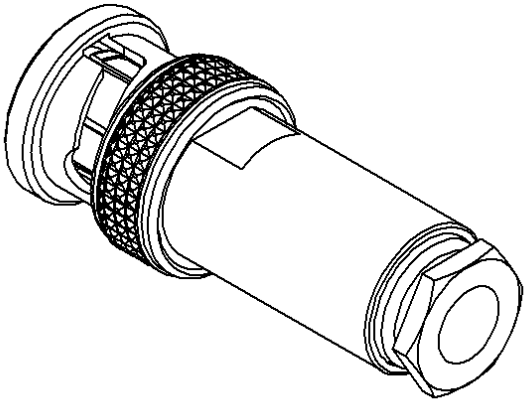



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	**BRASS**	**NICKEL 2**
Center contact	**BRASS**	**SILVER**
Outer contact	**-**	**-**
Insulator	**PTFE**	
Gasket	**-**	
Others parts	**BRASS**	**NICKEL2**
-	-	-
-	-	-

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

PACKAGING

Standard	Unit	Other
100	**Contact us**	**Contact us**

ELECTRICAL CHARACTERISTICS

Impedance			**50**	Ω
Frequency			**0-2**	GHz
VSWR	**1.2**	**+**	**0.2000**	x F(GHz) Maxi
Insertion loss			**-**	√F(GHz) dB Maxi
RF leakage	- (		**-**	- F(GHz)) dB Maxi
Voltage rating			**-**	Veff Maxi
Dielectric withstanding voltage			**6000***	Veff mini
Insulation resistance			**-**	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	**NA**	N mini
Axial force – Opposite end	**NA**	N mini
Torque	**-**	N.cm mini
Recommended torque		
Mating	**-**	N.cm
Panel nut	**-**	N.cm
Clamp nut	**150**	N.cm
A/F clamp nut	**9.5000**	mm
Mating life	**500**	Cycles mini
Weight	**18.1700**	g

ENVIRONMENTAL

Operating temperature	**-55/+155**	°C
Hermetic seal	**-**	Atm.cm3/s
Panel leakage	**-**	

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	**2.5**	**14.7**	**0**	**0**	**11.5**	**0**

Assembly instruction**: Clamp 03**

Recommended cable(s)

RG 58
KX 15
RG 141

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	**90**	N mini
- torque	**NA**	N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.

OTHER CHARACTERISTICS

***Test frequency at 60Hz;**
10 KVeff for mated pair

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Radiall:

R125326000 R141407000W R284C0351003 R284C0351015 R284C0351050 R114554000W R191329000 R929101/C290001-10CM EPXBE28SA R141557000W R142076161 R191303000 R124510000W R180300007W R191405000 R223424000 R284C0351054 R114165000W R112186000 R112553000 R180160007 R316553000 R125078000W R125403001 R143012000 R284C0351026 EPXBE13P1SB R142703000 R161325000W R929104/C290004-20CM