



MAPX	MODIFICATION	DATE

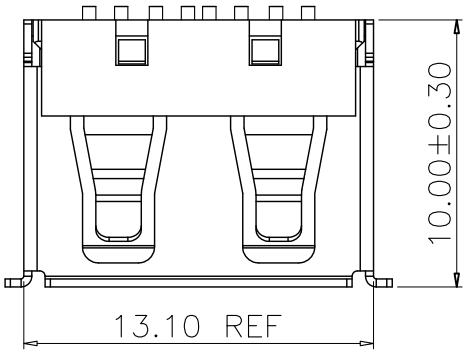

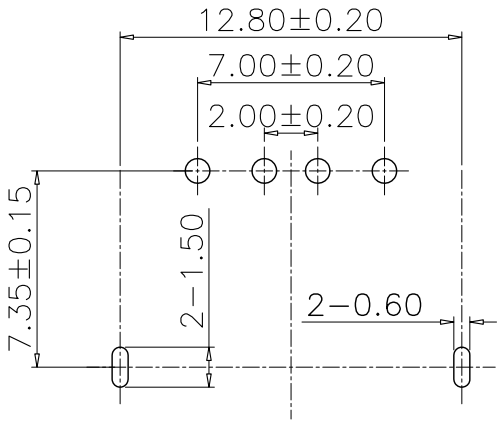

PCB HOLES(THE PATTERN SIDE) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.1mm

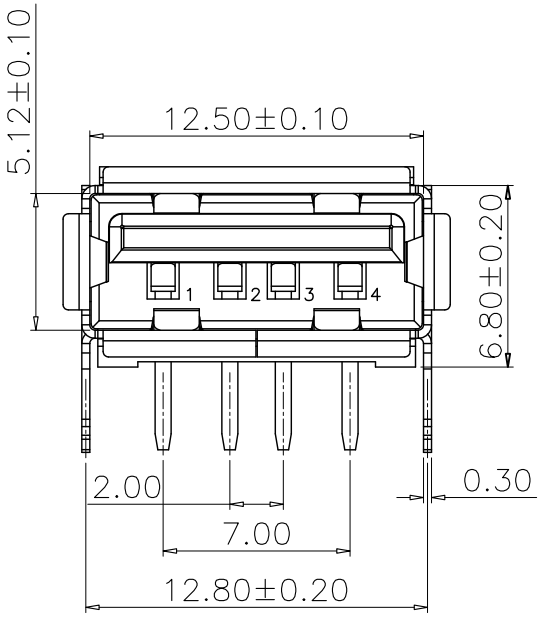

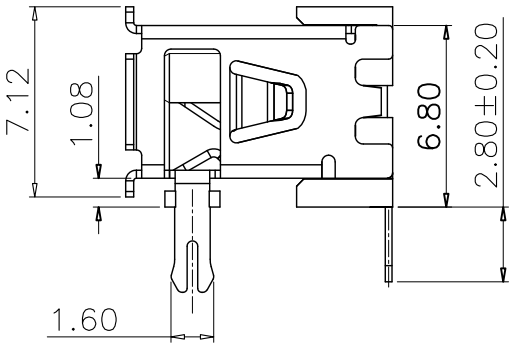

NOTES:
1. HOUSING: SEE NOTES,
   TERMINAL: SEE NOTES.
   SHELL: SEE NOTES.

SPECIFICATION:
1. ELECTRICAL CHARACTERISTIC:
   CONTACT RESISTANCE: 30MΩ MAX
   DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
   INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
   INSERTION FORCE: 35N(3.57KGF) MAX
   EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
   DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
   5000 CYCLES MIN
   5000 CYCLES EXTRACTION FORCE:3~35N
3. ENVIRONMENTAL:
   OPERATING TEMPERATURE: -55℃+85℃
4. Contact finish:
   01:Selective Gold Flash
   02:Selective Gold 3U″
   03:Selective Gold 5U″
   04:Selective Gold 15U″
   05:Selective Gold 30U″

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE

X	±0.25	X	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	909-151A1023D10100
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0B款前两脚有边铁壳PBT黑胶 DIP无耳朵
日期 DATE	2015.02.04	核准 APPD		角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

904-232A2031S10100 907-111A1022D10200 908-351A1011D10100 920-154A2021Y10110
905-761A2032S10200 906-262A1021D10200 917-B88C201AH70201 920-A62A2021S10108
910-151A2021D10100 920-A62A2021S10104 904-232B2032S10100 904-331B2032S10200
906-552A1012D10200 912-112A1011D10100 918-468K2029Y50000 920-C62A2021S10103
906-752B1114D10200 907-312A1101Y10210 911-221A2021S10100 918-415K3028S40000
920-A64A2091S101A3 912-312A1012D10100 916-151A1022Y10200 918-318K2023C40005
920-C52A2021S10105 920-F52A2021S10105 912-112A2021S10100 917-P81A202ES60201
918-418K2022Y40011 919-162A1012D10400