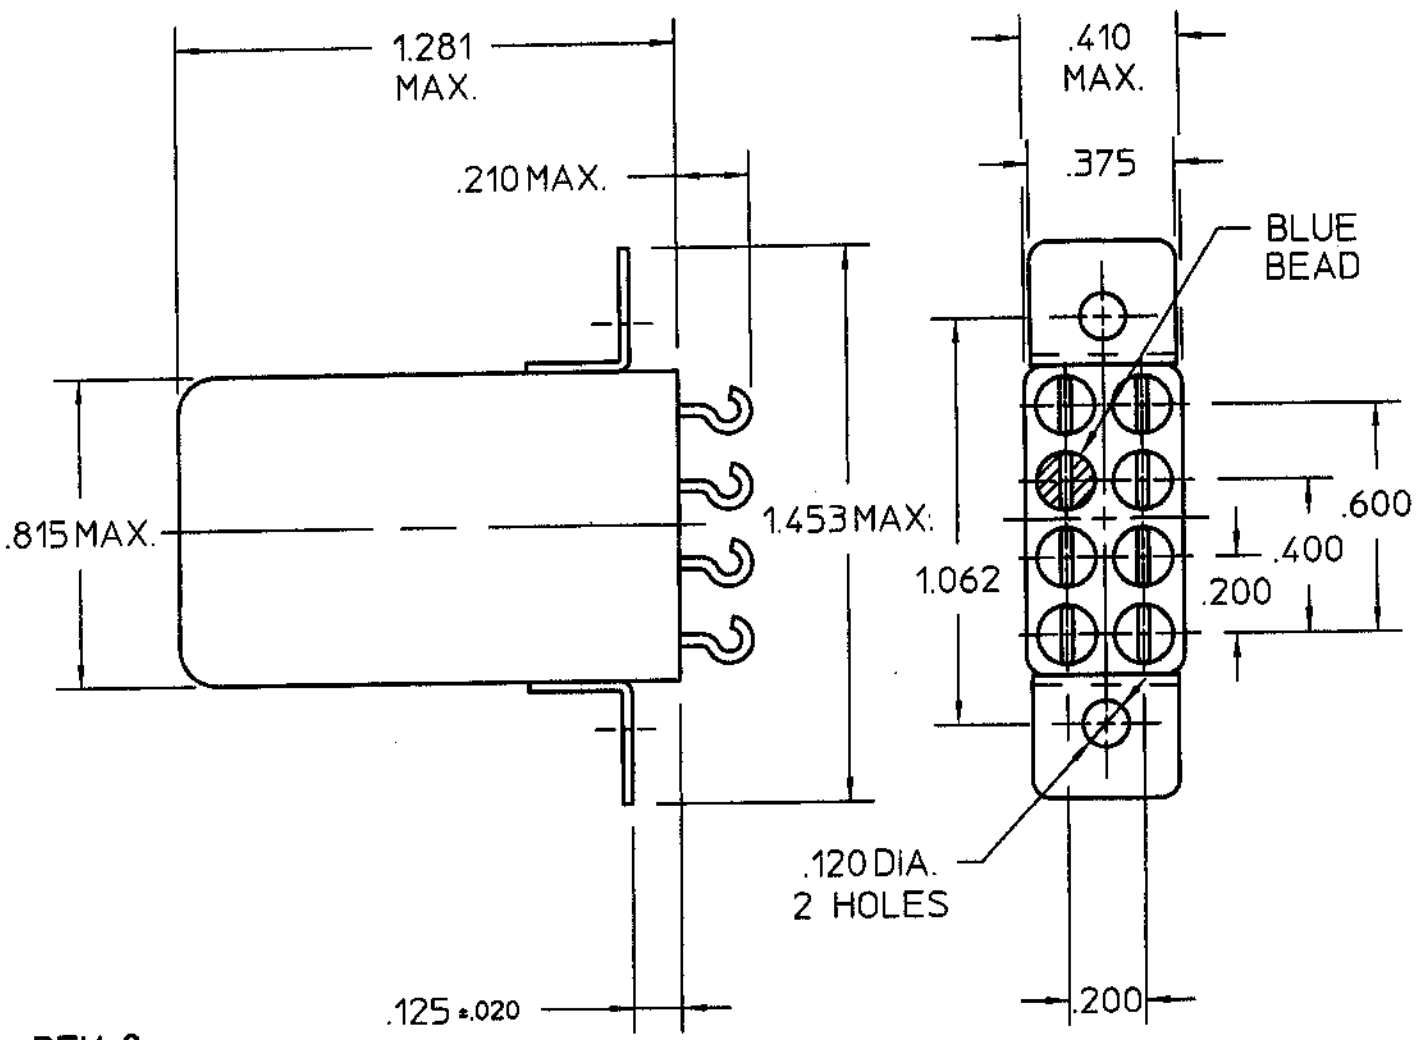


REV. 0

DCO 170403

CUSTOMER DATA SHEET


COIL: @ 25°C

RESISTANCE 100 OHMS ± 10%

NOMINAL VOLTAGE 40.0 mADC

MUST OPERATE 20.0 mADC

MUST RELEASE 10.0 mADC MAX, 2.0 mADC MIN

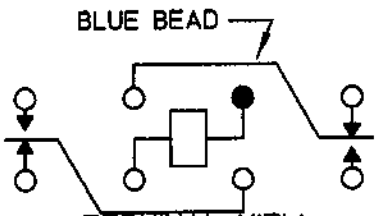

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX
RELEASE TIME 10 MS MAX
CONTACT BOUNCE 2 MS MAX

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 2/16/01 | CK. TLG 02-16-01

CII Technologies™
advanced control electronic solutions

CUST. QPL

CUST. NO. M5757/13-084 REV.

3SAT RELAY

3SAT1301A2

F-718 REV 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

3-1393225-0 3430B2F51RTDF 650075-000 CRGCQ2010J3K3 RH73H2A40MKTN SBCHE154R7K SBCHE64R7K 1-794222-0 1743455-2 175977-2 2-292161-3 2310537-1 3631B101LL 936348-1 CPF0402B37K4E1 1969656-1 917696-1 2834055-1 2380312-2 1-962915-1 1903112-2 2377783-2 1393431-1 MPT100C18RF SMW73R0JT 2005330-1 ROX05SJ18R TE50BR39J 141991-2 U5254-000005-030PA