
Ultrasonic distance measuring sensors

UNDK 09U6914/KS35AD1

dimension drawing

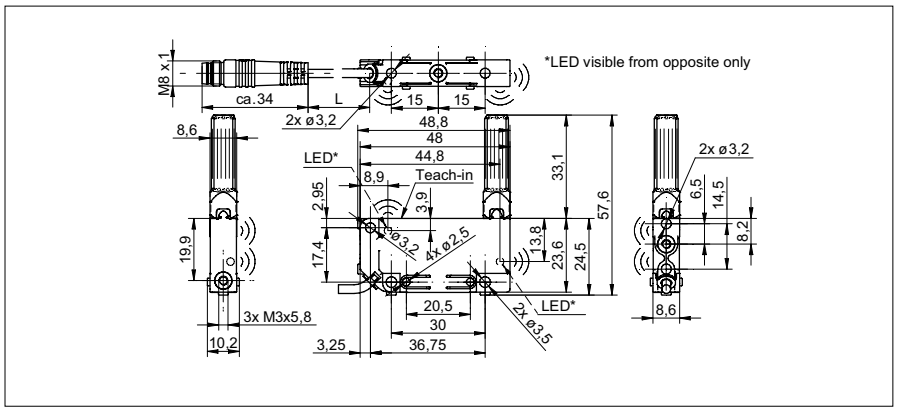

general data

scanning range Sd	3 ... 150 mm
scanning range close limit Sdc	3 ... 150 mm
scanning range far limit Sde	3 ... 150 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
response time ton	< 35 ms
release time toff	< 35 ms
temperature drift	< 2 % of distance to target So
sonic frequency	380 kHz
adjustment	Teach-in
alignment aid	target indication flashing
light indicator	yellow LED / red LED

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
output current	< 15 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
material (beam columnator)	POM
width / diameter	8,6 mm
height / length	48,8 mm
depth	57,7 mm
connection types	flylead connector M8, L=200 mm


ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

photo



connection diagram

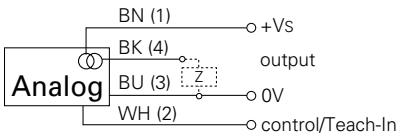


- Scanning range 3 ... 150 mm, measured from nozzle

Ultrasonic distance measuring sensors

UNDK 09U6914/KS35AD1

typical sonic cone profile

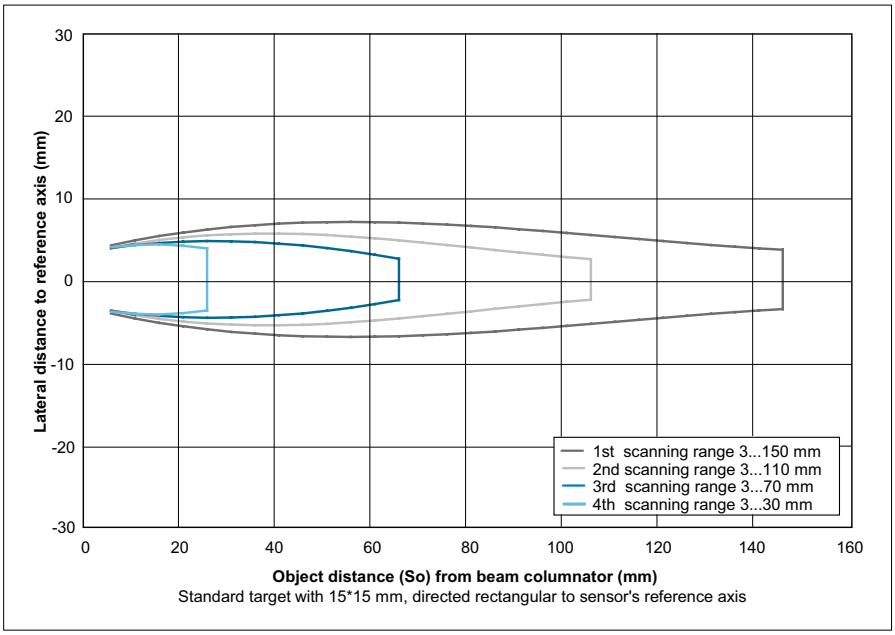

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Baumer:

IFFM08P17A6/L MEX3-F20.B19 MEX5-D31.B38 11223791 11232565 ARA-10.D30L FTDR 047A048 MEX5-D30.B26 MTR2-D50.B19 11229489 MEX3-F21.B82 MEX5-D30.B24 11112012 IFFM04N1501/O1L O300.GP-GW1B.72N EIL580-SC10.5FN.01024.A MEX5-F30.B22 O300.TR-ZZZZ.72N OR18.ZL-PV1P.7BO/B013 11130475 11190721 MEX3-F21.B29 11007902 IFRM 06P17A5/S35L IFRM12N1701/S14L LBFS-03421.0 MTR1F50B19 MEX5-D31.B79 MIT3-D22.B16 10127804