
# 132-0113-0003 Product Details

Live Product Chat

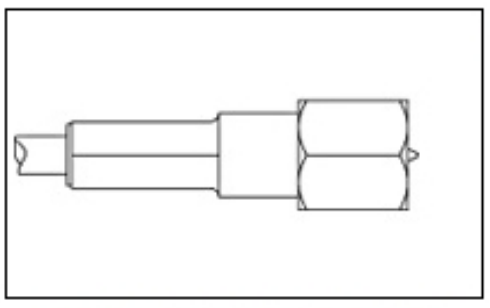

**132-0113-0003**
(1466327-1)
TE Part Number: 1466327-1
Active
Add to Part List

## SMB RF Connectors

Always EU RoHS/ELV Compliant (Statement of Compliance)

**Product Highlights:**
- Connector
- Plug
- Miniature
- Terminate To Coaxial Cable
- Coupler Style = Threaded

View all Features | Find Similar Products

**Quick Links**
- Check Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product

## Documentation & Additional Information

**Product Drawings:**
- 132-0113-000X=PLUG ASSY ENVIRONMENTAL GOLDEN CRIMP 5... (TIF, English)

**Catalog Pages/Data Sheets:**
- None Available

**Product Specifications:**
- None Available

**Application Specifications:**
- None Available

**Instruction Sheets:**
- Golden Crimp and Crimp Silver Connectors (PDF, English)

**CAD Files:**
- None Available

List all Documents

**Additional Information:**
- Product Line Information

**Related Products:**
- Tooling

## Product Features (Please use the Product Drawing for all design activity)

**Product Type Features:**
- Product Type = Connector
- Gender = Plug
- Connector Series = Miniature
- Body Style = Straight
- Grade = Commercial
- Safety Wire Holes = Without
- Thread Size = 4.83 [.190]-32
- Body Material = Brass
- Coupling Nut Style = Full Hex
- Dielectric Material = TEFLON

**Mechanical Attachment:**
- Panel Attachment = Without

**Electrical Characteristics:**
- Connector Impedance (Ω) = 50
- Environmental Seal = With
- Solderless = Yes

**Termination Related Features:**
- Coaxial Cable Termination Type = Crimp

**Body Related Features:**
- Coupler Style = Threaded
- Pin Protection = Without
- Solder Lug = Without
- Body Plating = Gold per MIL-G-45204, Type II, Grade C, Class 1
- Cable Jacket Diameter (mm [in]) = 2.24 [0.088]

**Contact Related Features:**
- Center Contact Plating = Gold per MIL-G-45204, Type II, Grade C, Class 1
- Contacts = With

**Industry Standards:**
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260° C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**
- Terminate To = Coaxial Cable

**Other:**
- Brand = Microdot


© 2008 Tyco Electronics Corporation All Rights Reserved

Downloaded from Arrow.com.