KUU SEMICONDUCTOR

KAU3321D5

Transient Voltage Suppressors for ESD protection

DESCRIPTION

The KAU3321D5 a is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

This device has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EFT (electrical fast transients).

FEATURES

- ✧IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- ✧IEC61000-4-4 (EFT) 40A (5/50ηs)
- ✧Peak power dissipation: 75W (8/20μs)
- ✧Protects one I/O line
- ✧Low clamping voltage
- ✧Working voltages : 5V
- ✧Low leakage current

MACHANICAL DATA

- ✧SOD-523 package
- ✧Terminals: Tin plated, solderable per MIL-STD-750, method 2026
- ✧Packaging: Tape and Reel
- ✧Reel size: 7 inch
- ✧MSL3


ORDERING INFORMATION

- ✧Package: SOD-523
- ✧Material: Halogen free
- ✧Packing: Tape & Reel
- ✧Quantity per reel: 3,000pcs

APPLICATIONS

- ✧High Speed Line :USB1.0/2.0, VGA, DVI, SDI,
- ✧Serial and Parallel Ports
- ✧Notebooks, Desktops, Servers
- ✧Projection TV
- ✧Cellular handsets and accessories
- ✧Portable instrumentation
- ✧Peripherals

PIN CONFIGURATION

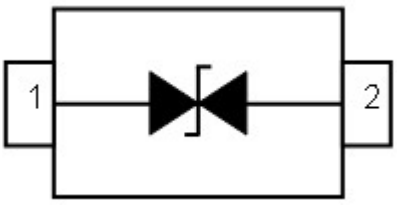

PACKAGE OUTLINE




ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	±30 ±30	kV
P_{PP}	Peak Pulse Power (8/20μs)	75	W
T_{OPT}	Operating Temperature	-40~150	°C
T_{STG}	Storage Temperature	-40~150	°C


ELECTRICAL CHARACTERISTICS (Tamb=25°C)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V_{RWM}	Reverse Working Voltage				5.0	V
V_{BR}	Reverse Breakdown Voltage	I_T = 1mA	5.6		9.0	V
I_R	Reverse Leakage Current	V_{RWM} = 5V			1.0	μA
V_C	Clamping Voltage	I_{PP} = 1A, t_p = 8/20μs			9.5	V
V_C	Clamping Voltage	I_{PPmax} = 5A , t_p = 8/20μs			15.0	V
C_J	Junction Capacitance	V_R = 0V, f = 1MHz			15	pF

ELECTRICAL CHARACTERISTICS CURVE

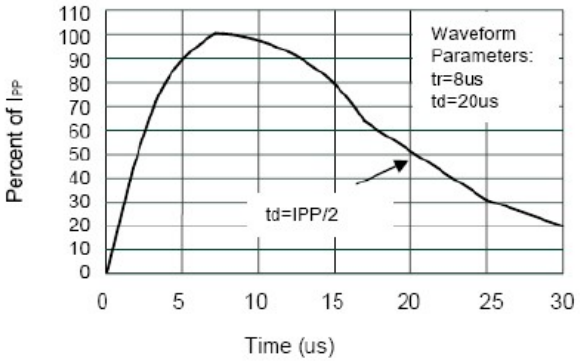


Pulse Waveform

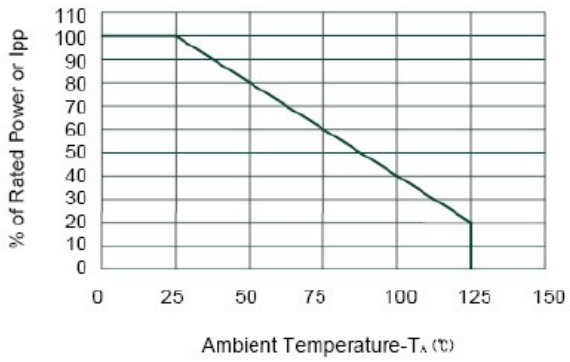

Power Derating Curve

SOD-523 PACKAGE OUTLINE DIMENSIONS

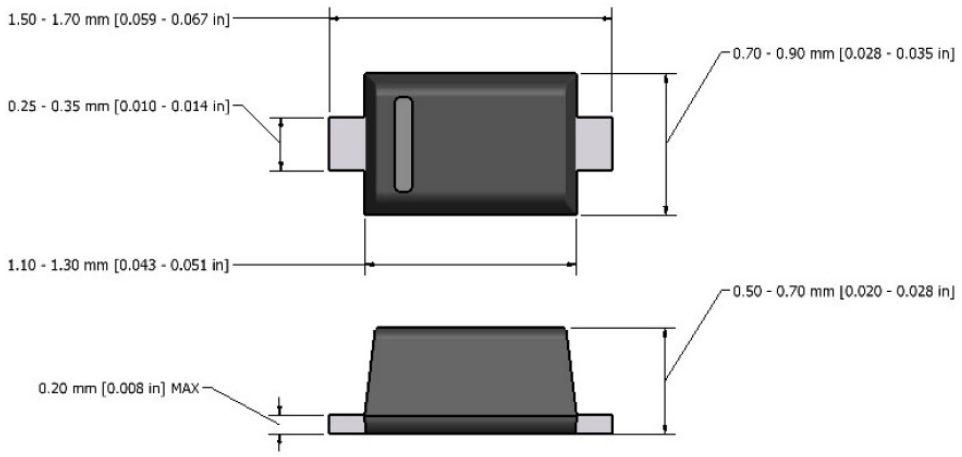

Note: Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

KUU:

PESD12VS1UB SMDJ9.0A MBR0540-7-F K1N5819HW-7-F KNTC0603/10KF3950 LSMD150 1N5819W S4 BV03C MSMD150 SD103AWS S4 SMF15A LSMD050 MSMD050/24 SJD12C15L01 ESD05V32D-LC WNM4002-3/TR SMBJ6.0CA SMDJ7.0A 1N60PW B340A GBLC15CI SMBJ17A SM712.TCT SMBJ160CA SMDJ16A SMDJ7.5CA SMDJ8.5A KMOV0402E180C030T ESD0301BU ESD3V3D523-2U