
This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

1. Electrical
1.1 Impedance: 50ohm
1.2 Frequency: DC-3GHz
1.3.Insulation resistance: ≥5000MΩ
1.4 Dielectric withstanding voltage: 500V(rms)
1.5 Center Contact resistance≤ 3MΩ
1.6 Outer contact ≤ 2MΩ

2 Material&Finish
2.1 Inner Contact: Beryllium copper, gold plated
2.2 Outer Contact: brass, gold plated
2.3 Insulators: PTFE

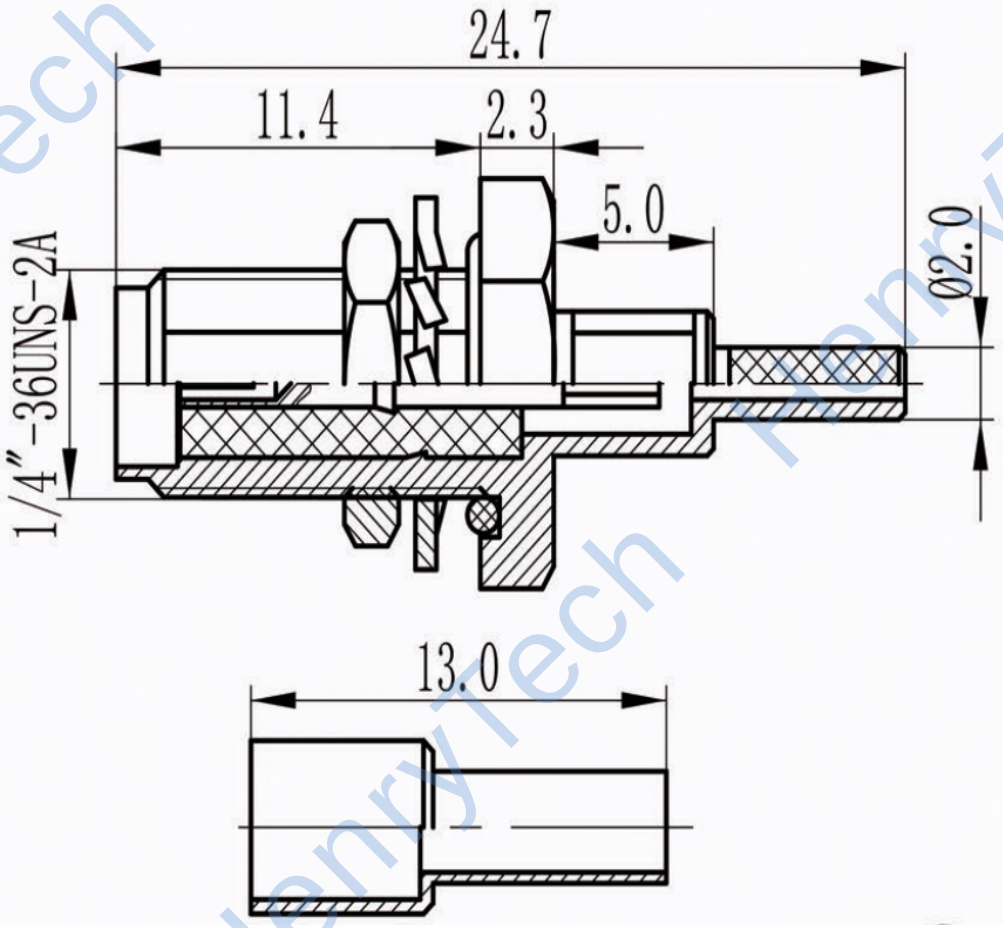

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector SMA Female B/H Conn. for 1.37mm Cable	HenryTech			
ENGINEER: L. yu 19/03/17		DIMENSION IN MILLIMETERS (mm)			
APPROVED: W. yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPECIFIED: X ±0.50, .X ±0.20, .XX ±0.10, ANGLES ±1°	PART NO: HL-SMA-KY21Y	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HT-LFCN-400+ HT-LFCG-1700+ H3-TC1-1TG2+ HG-SCN-2-65+ HL-SMAMF-2-18-15dB HL-SSMA-KHD-1 HT-SCA-4-10+ HX-SMA/SMP-JK HT-QCN-19+ H2SYDC-20-62HP+ H3-MABA-007871-CT1A40 H3-MABA-010551-CF1071 H3-MAPD-008109-C30040 HL-SMA/SMB-KK HL-SMB-K3DY HN-LP7-0.5-1.27(9.4-2.8) HX-1.85-JJ HL-MCX-KE-02 HLCC2250G HT-HFCN-2700+ HT-HFCN-3800+ HT-LFCG-530+ HX-N-JK H3-MABA-011085 HN-DC2016-0.5(12-4.6)M HG-SCN-2-22+ HL-N-KKC HL-SMA-KHD4 HT-BFHKI-1572+ HT-LFCN-3800+