




| MAPX | MODIFICATION | DATE |
|---|---|---|
| | | |

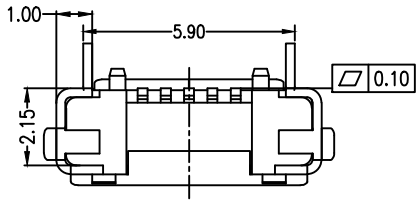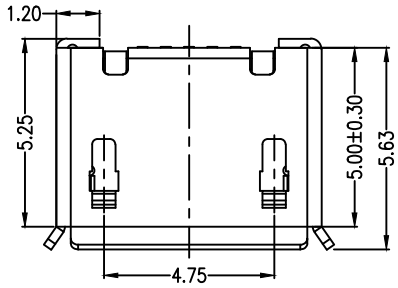





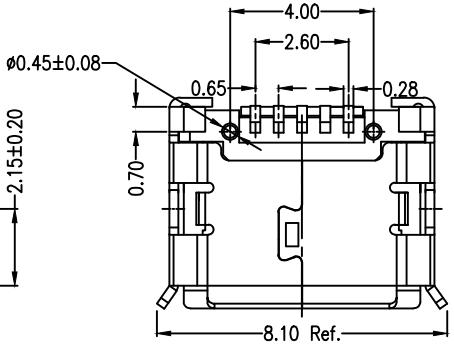

RECOMMANDED PCB LAYOUT
PCB图仅供参考

Note:
1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

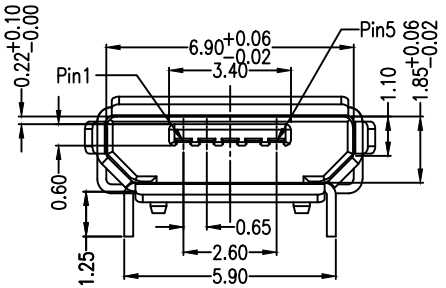2.Specification:
- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C
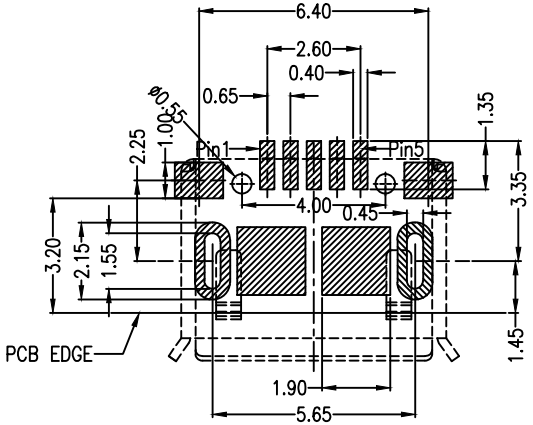
| 产品图 PRODUCT CHART DWG | | |
|---|---|---|
| 公差一览表 TOLERANCE UNLESS OTHERMSE | | |
| X. | ±0.30 | X. ±5.° |
| .X | ±0.25 | .X ±2.° |
| .XX | ±0.20 | .XX ±1.° |
| .XXX | ±0.10 | .XXX ±0.5° |

# 深圳市精拓金电子有限公司

| | | | | | |
|---|---|---|---|---|---|
| 单位 UNITS | MM | 制图 DRAWING | YANG | 制图料号 PRODUCT PART NO. | 920-C52A2021S10112 |
| 比例 SCALE | 1:1 | 审核 CHKD | 郭志富 | 产品名称 PRODUCT NO. | MICRO 5S B型5.9两脚长1.25插板有边有柱加焊脚SMT短端 |
| 日期 DATE | 2019.11.23 | 核准 APPD | 黄国荣 | 角法 VIEW | 版本 VER A0 |

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## Jing extension:

904-331B2032S10200 907-111A1022D10200 907-312A1101Y10210 908-351A1011D10100
911-221A2021S10100 918-418K2022Y40011 920-A62A2021S10104 920-A64A2091S101A3
920-C52A2021S10105 912-112A1011D10100 906-552A1012D10200 920-A62A2021S10108
920-C62A2021S10103 904-232A2031S10100 905-761A2032S10200 916-151A1022Y10200
918-415K3028S40000 912-112A2021S10100 906-752B1114D10200 910-151A2021D10100
920-154A2021Y10110 920-F52A2021S10105 912-312A1012D10100 917-B88C201AH70201
917-P81A202ES60201 918-318K2023C40005 918-468K2029Y50000 919-162A1012D10400
904-232B2032S10100 906-262A1021D10200