

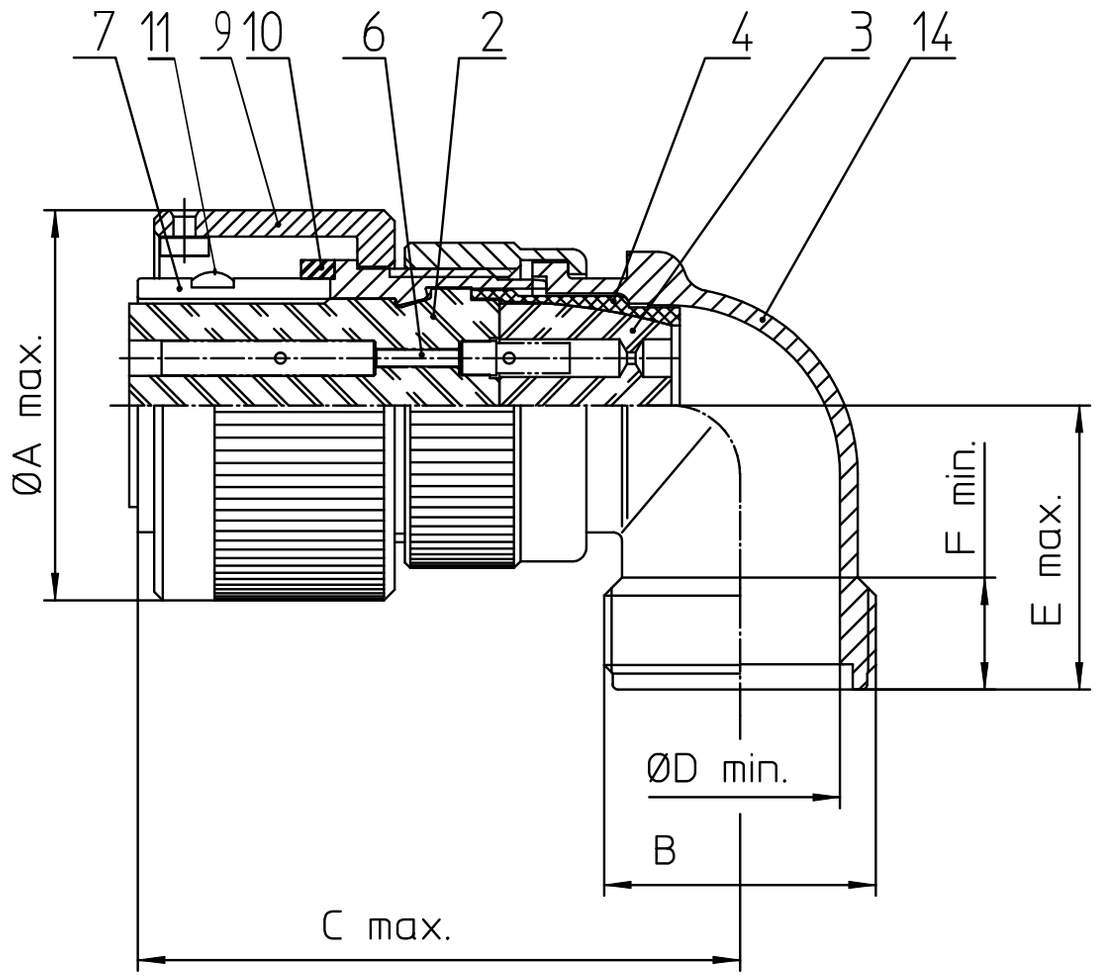


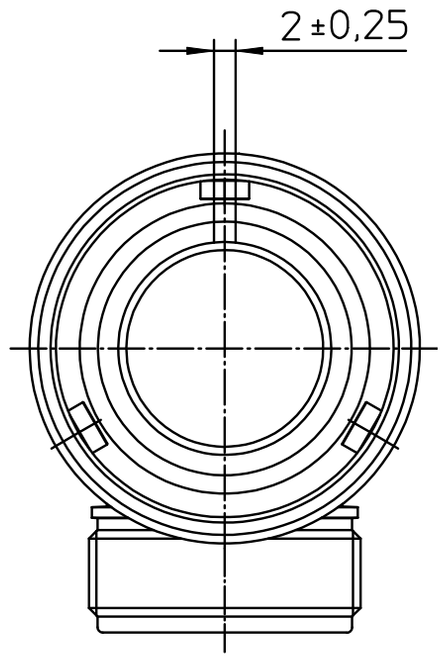

NO.	MASSE / DIMENSIO
A	36.5
B	1-20UNEF-2A
C	58
D	18.3
E	27
F	9.4



NO.	BESCHREIBUNG / DESCRIPTION
2	ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
6	KONTAKTBUCHSE / CONTACT SOCKET
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT
10	DICHTRING FRONT / FRONT SEALING RING
11	SCHIRMKRANZ/SHIELDING BRAID
14	F-ENDGEHÄUSE / F-ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:	
Shell Material:	Aluminium alloy
Shell Plating:	Olive drab chromate over cadmium (conductive)
Insulator Material:	CR-Elastomere
Contact Material:	Copper alloy
Contact Plating:	Hard silver

all dimensions are in mm
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for
CUSTOMER

ITT
Engineered for life
ITT CANNON GmbH
D - 71384 Weinstadt/Germany

description CA3108F18-12S-B-15
Plug, 90° shielded
Shielded with endbell for shielded braids & heat shrinkable boots
AWG Crimp / Socket / Layout: 18-12

© All rights reserved. Reproduction or issue to third in any form whatever is only permitted with written authorization of ITT Cannon

page 1/1

revision 3765 3. Sep 24

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ITT:

CA3101F14S-A7PA206 CA3102E18-10PYBF80 CA3108R20-23SB CB12-12SG KPT02E-12-3S CA06COME14SA7S-44 CA08COM-F14S-2S CA3102E16S-1SWBF80A176 CA3102R16S-4P CA3102R18-10PY KPT04-12-3S CA3102R14S-6S MS3102E12S3P 1929900460 CA3102E16S-1PWBF80A176 CA3108E24-10PBF80 KPT02E83AP VG95234B1-22-22PN CA3102R18-22SF80 KPT06J-14-12P MS3101R10SL-4S CA3102E16S-5SB 192900-0030 CA3100F18-10PB MS3106F16S-8S XLR531 CA3102E16-10PXBF80 CA3102E24A24PB01A176 MS3106E2222P VG95234B1-28-11SN