



ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

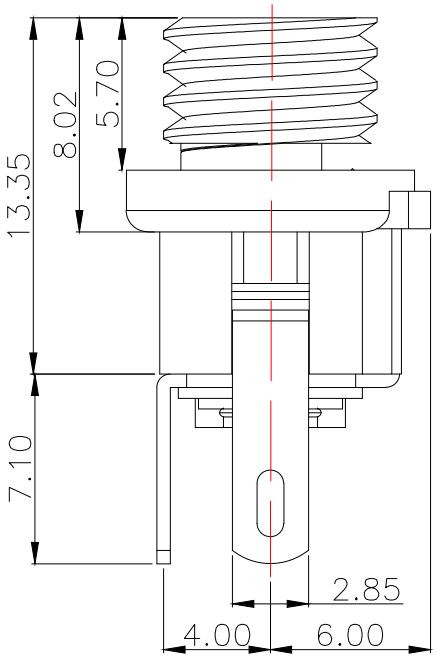


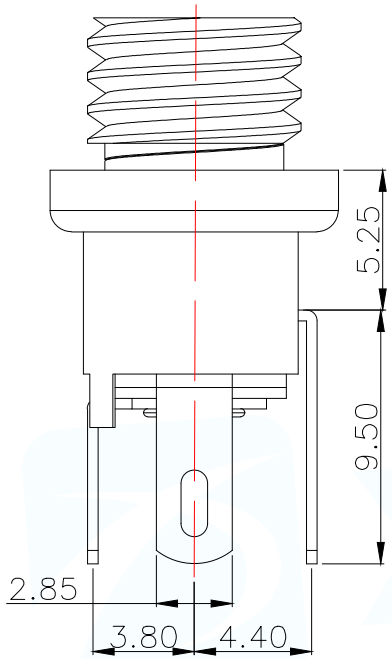


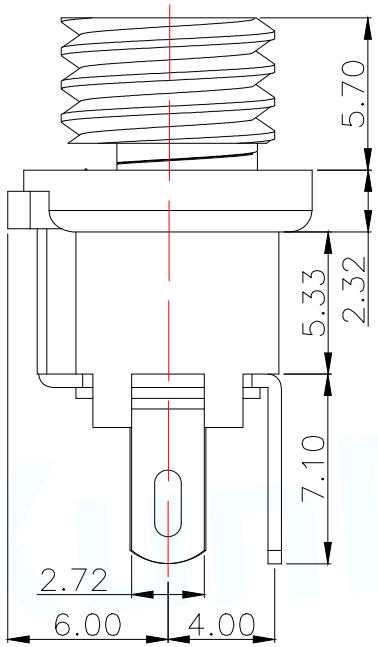


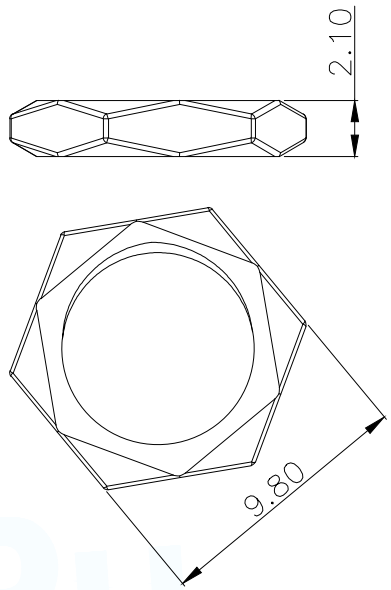

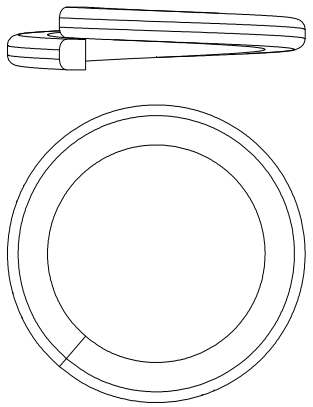


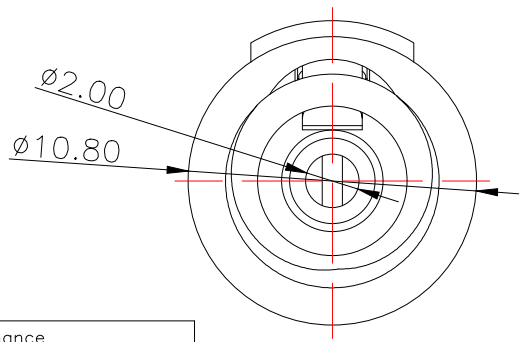

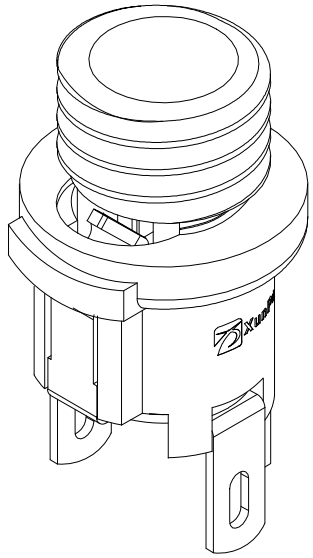



SCHEMATIC

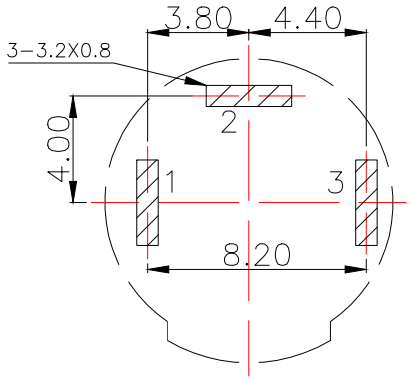

PCB.WELDING DRAWING

Main technical performance	
Rated electrical load	DC 24V 2.5A
Contact resistance	≤0.03Ω
Insulation resistance	≥100MΩ
Pressure resistance	AC 500V 1min
Insertion force	3–30N
Operating temperature range	–20C°~+70C°
service life	5000cycles

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd		
UNLESS OTHERWISE SPECIFED TOLERANCES			TITLE: DC SOCKET	
			PAR	DC–025M–B200
DECIMALS:	ANGLES:		DWN	
X.X±0.30	X.°±5°		CHKD	
X.XX±0.25	X.X°±1°		APVD	
X.XXX±0.15		CUSTOMER COPY	SCALE N:A	UNIT:MM
			SIZE:A4	SHEET:1F1 REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

WAFER-GH1.25-6PLB WAFER-PH2.0-2PJK WAFER-PH2.0-3PWB DC-031A-A100
FPC-0.5FX-14PWCR-H20 FPC-0.5AL-6PB FPC-0.5FX-4PWCR-H20 SMA-KWE-323C-H13X23-LW
TYPEC-304YDSW-ACP16 WAFER-PH2.0-8PLB WAFER-WBM4.2-16PJK-GB FPC-0.5FX-4PWBH15
FPC-1.0AX-14PWCR-H25 FPC-1.0AX-4PWCR-H25 FPC-0.5FX-16PWCR-H20 WAFER-VH3.96-4PLB
FPC-0.5AS-5PWCR-H20 FPC-0.5HF-10PWBR-H20 PHB2.0-02-20PZZ RJ45-005-014-11
WAFER-MX1.25B-8PWB FPC-0.5AX-30PWCR-H20 WAFER-PH2.0-11PZZ WAFER-PH2.0-6PWB
FPC-0.5AX-24PWCR-H20 HDMI-212L MU-103-ARW64 WAFER-XH2.54-4PWZ-H62 FPC-0.5FX-20PWBH15
FPC-1.0HF-4PWAR-H20