



标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

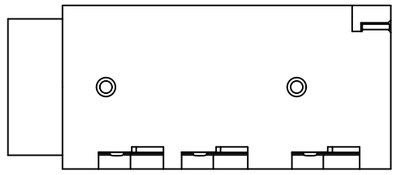


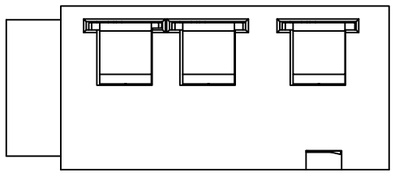


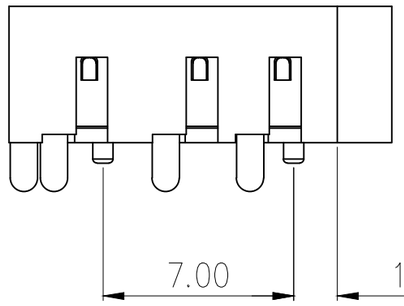

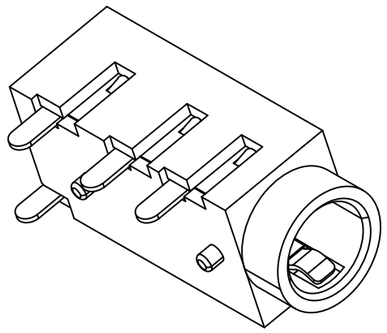



3D VIEW

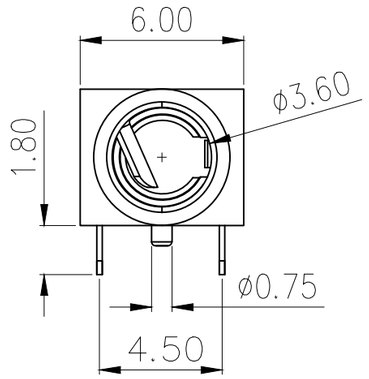



电气性能

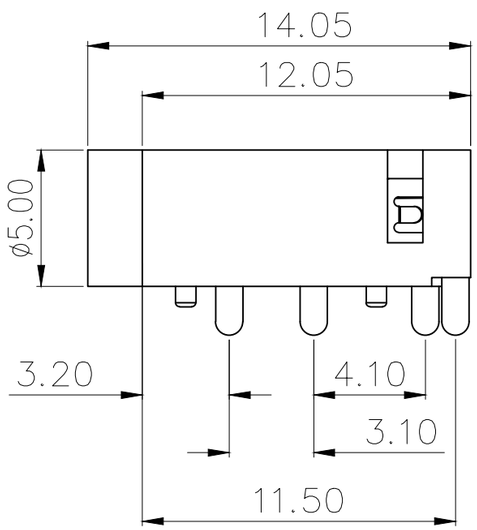

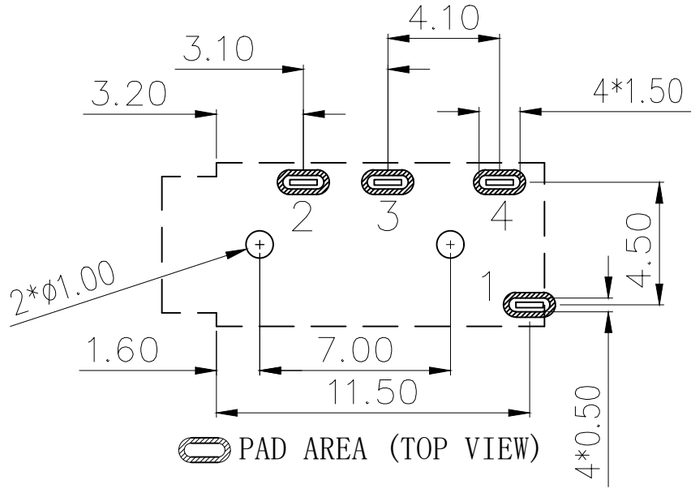

PAD AREA (TOP VIEW)

RECOMMEND PCB LAYOUT(±0.05)

NOTES
1. MATERIAL:
   1.1. HOUSING:LCP COLOR IS BLACK
   1.2. CONTACT: PHOSPHOR COPPER (C5191,T=0.2mm);
2. FINISH:
   2.1. TERMINAL:
        CONTACT AREA: NI PLATED OVER ALL;
        SOLDER AREA: SN PLATED OVER ALL;
3. ELECTRICAL:
   3.1. VOLTAGE RATING: 30 VAC RMS;
   3.2. CURRENT RATING: 0.5 AMP;
   3.3. CONTACT RESISTANCE: 30MILLIOHMS MAX.;
   3.4. WITHSTAND VOLTAGE: 500 VAC RMS
        50(60)Hz,1MIN.;
   3.5. INSULATION RESISTANCE: 100MEGOHMS MIN
        @500V DC;
4. MECHANICAL:
   4.1. MATING FORCE: 5~25N;
   4.2. UNMATING FORCE: 5~25N;
   4.3. OPERATING LIFE: 5000 CYCLES;
5. ENVIRONMENTAL:
   5.1. STORAGE TEMPERATURE RANGE: -40℃~+85℃
   5.2. OPERATION TEMPERATURE RANGE: -25℃~+70℃;
6.SALT SPRAY TEST:8H(EXCLUDING RIVETED BENDS)

序 号	品 名	材 质	电镀/颜色	备 注
2	接触	铜	镀镍	
1	基座	LCP	黑色	

深圳市虹成电子有限公司		品 名 TITLE	耳机座		
		料 号 PART NO	HC-PJ-320AB		
UNLESS OTHERWISE, GENERAL TOLERANCE:	比 列 SCALE	1:1			
X.xxx ±0.10 X.xx ±0.20 X.x ±0.30 ANGULAR: X.xx° ±1° X.x° ±3° X.° ±5°	单 位 UNIT	MM	制 图 DRAW	AhYe	
	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云	
	版 本 REV	A	批 准 APPROVE	赵亮亮	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HC:

HC-FPC-0.5-40P-FH20 HC-FPC-0.5-50P-FHH20 HCZZ0001-2 HCZZ0451-3 HC-PHB2.0-2x5A HC-PZ254-11.5L-1x10PZ HCZZ0451-6 HCZZ0530-4 HC-PM254-8.5H-2x20PS HC-PZ254-11.5L-2x18PZ HCZZ0001-4 HC-PZ254-13.8L-1x6PWA HC-USB3.0-C26 HC-USB3.0-L175-2X1-J HC-FPC-0.5-24P-FH20 HC-USB3.0-C34-P HCZZ0032-6 HCZZ0576-5 HC-FPC-0.5-10P-FH20 HC-FPC-0.5-6P-CSH20 HC-PHB2.0-2x4AW HC-PM200-4.3H-2x20PZ HC-PM200-4.3H-2x8PS HCZZ0451-4 HC-USB3.0-L257-J HCZZ0001-6 HC-PM254-5.0H-2x10PZ HC-PM254-8.5H-1x21PZ HC-PZ127-7.2L-2x3PS HCZZ0514-6