
This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

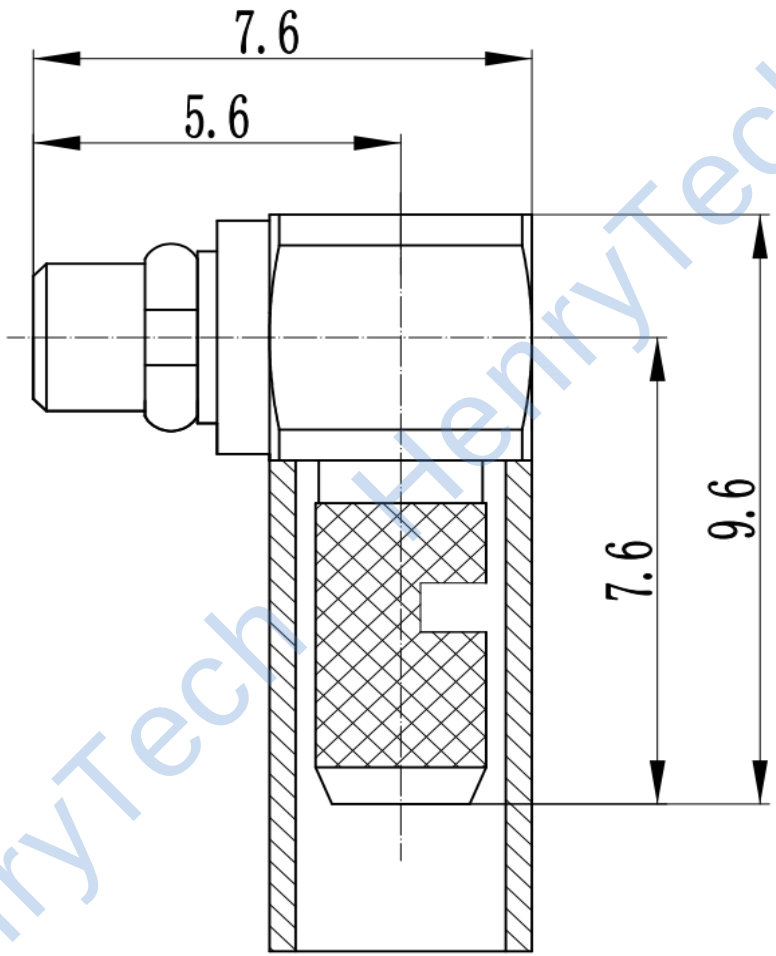

1 Electrical
1.1 Impedance: 50Ω
1.2 Frequency: 0-6GHz
1.3 Working voltage: ≤170V
1.4 Insulation resistance: ≥1000MΩ
1.5 Dielectric withstanding voltage: 500V
1.6 .Center contact resistance≤ 10MΩ
1.7 Outer contact resistance ≤ 5MΩ
1.8 VSWR: 1.30:1

2 Material&Finish
2.1 Inner Contact: Brass, gold plated
2.2 Outer Contact: brass,gold plated
2.3 Insulators: Teflon
2.4 C-ring: Beryllium-copper,gold plated

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector MMCX Male Right Angle Conn. For RG316 cable		HenryTech		
ENGINEER: L. yu 19/03/17			DIMENSION IN MILLIMETERS (mm)		
APPROVED: W. yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-MMCX-JW3F	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech HenryTech HenryTech HenryTech HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HT-LFCN-3800+ HL-SMAMF-2-18-15dB H3-MABA-010551-CF1071 H3-TC1-1TG2+ HL-SMA-KHD4 HL-SMA/SMB-KK H2SYDC-20-62HP+ H3-MAPD-008109-C30040 HT-HFCN-2700+ HT-LFCG-1700+ HX-N-JK HL-SMB-K3DY HG-SCN-2-22+ HT-QCN-19+ HX-SMA/SMP-JK HL-SSMA-KHD-1 HT-HFCN-3800+ HT-LFCG-530+ HT-LFCN-400+ H3-MABA-007871-CT1A40 HG-SCN-2-65+ HN-LP7-0.5-1.27(9.4-2.8) H3-MABA-011085 HL-N-KKC HLCC2250G HN-DC2016-0.5(12-4.6)M HT-BFHKI-1572+ HX-1.85-JJ HL-MCX-KE-02 HT-SCA-4-10+