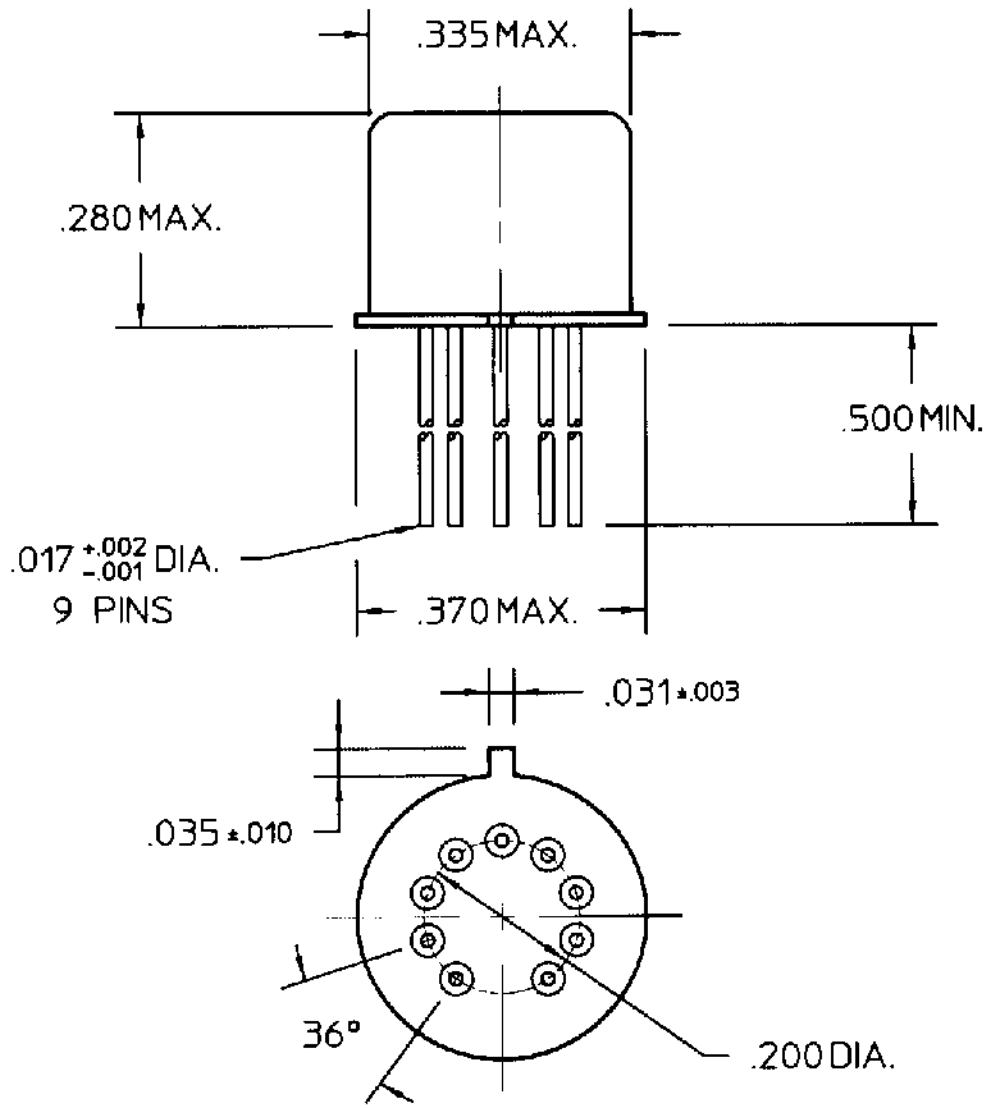


REV. 0

DCO 141534

COIL: @ 25°C

RESISTANCE	1560 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
	TURN-ON BASE CURRENT 0.13 mADC
MUST RELEASE	8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 2.0 MS MAX

TURN-OFF TIME 7.5 MS MAX

CONTACT STABILIZATION TIME 2.0 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 12/3/99 CK. [illegible] 12/3/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL

CUST. NO. M28776/1-030M REV.

JMAT RELAY

JMACT-26XM

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2834055-1 CRGCQ2010J3K3 TE50BR39J 1-962915-1 2-292161-3 650075-000 CPF0402B37K4E1 MPT100C18RF 2380312-2 ROX05SJ18R 2310537-1 2377783-2 936348-1 1-794222-0 175977-2 3430B2F51RTDF 3631B101LL U5254-000005-030PA 1743455-2 1903112-2 SBCHE64R7K 1393431-1 1969656-1 3-1393225-0 917696-1 RH73H2A40MKTN SBCHE154R7K SMW73R0JT 141991-2 2005330-1