Final datasheet

EasyPACK™ module with TRENCHSTOP™ 5 and RAPID 1 diode and PressFIT / pre-applied thermal interface material / NTC

Features


Typical appearance

- Electrical features
  - V_{CES} = 650 V
  - $I_{C\ nom}$ = 75 A / I_{CRM} = 150 A
  - Low switching losses
  - Increased blocking voltage capability up to 650 V
  - Suitable Infineon gate drivers can be found under https://www.infineon.com/gdfinder
- Mechanical features
  - Al_2O_3 substrate with low thermal resistance
  - Compact design
  - PressFIT contact technology
  - Rugged mounting due to integrated mounting clamps
  - Pre-applied thermal interface material

Potential applications

- UPS systems
- Three-level applications

Product validation

- Qualified for industrial applications according to the relevant tests of IEC 60747, 60749 and 60068

Description

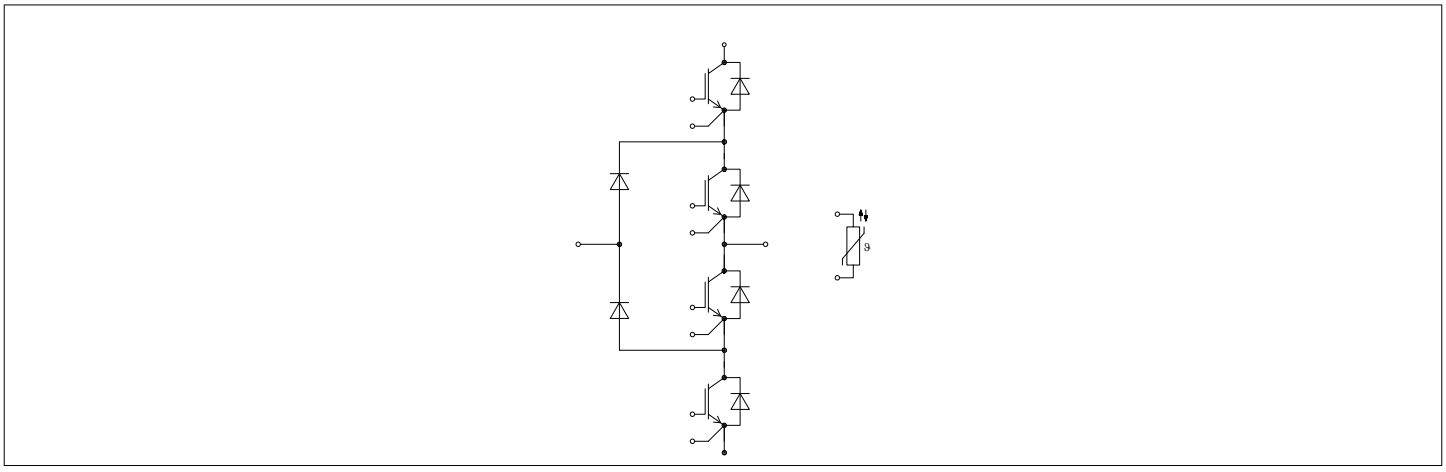


Table of contents

	Description	1
	Features	1
	Potential applications	1
	Product validation	1
	Table of contents	2
1	**Package**	3
2	**IGBT, T1 / T4**	3
3	**IGBT, T2 / T3**	5
4	**Diode, D1 / D4**	6
5	**Diode, D2 / D3**	7
6	**Diode, D5 / D6**	8
7	**NTC-Thermistor**	9
8	**Characteristics diagrams**	10
9	**Circuit diagram**	19
10	**Package outlines**	20
11	**Module label code**	21
	Revision history	22
	Disclaimer	23

1 Package

Table 1 Insulation coordination

Parameter	Symbol	Note or test condition	Values	Unit
Isolation test voltage	V_{ISOL}	RMS, f = 50 Hz, *t* = 1 min	2.5	kV
Isolation test voltage NTC	$V_{ISOL(NTC)}$	RMS, f = 50 Hz, *t* = 1 min	2.5	kV
Internal isolation		basic insulation (class 1, IEC 61140)	Al_2O_3	
Comparative tracking index	*CTI*		> 200	
Relative thermal index (electrical)	*RTI*	housing	140	°C

Table 2 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Stray inductance module	L_{sCE}			23		nH
Module lead resistance, terminals - chip	$R_{AA'+CC'}$	T_H = 25 °C, per switch		1.1		mΩ
Module lead resistance, terminals - chip	$R_{CC'+EE'}$	T_H = 25 °C, per switch		1.4		mΩ
Storage temperature	T_{stg}		-40		125	°C
Maximum baseplate operation temperature	T_{BPmax}				125	°C
Mounting force per clamp	*F*		40		80	N
Weight	*G*			39		g

***Note**: The current under continuous operation is limited to 25A rms per connector pin.*
Storage and shipment of modules with TIM => see AN 2012-07

2 IGBT, T1 / T4

Table 3 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Collector-emitter voltage	V_{CES}		T_{vj} = 25 °C	650	V
Implemented collector current	I_{CN}			75	A
Continuous DC collector current	I_{CDC}	$T_{vj\,max}$ = 175 °C	T_H = 65 °C	50	A
Repetitive peak collector current	I_{CRM}	t_p limited by $T_{vj\,op}$		150	A
Gate-emitter peak voltage	V_{GES}			±20	V

Table 4 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Collector-emitter saturation voltage	$V_{CE\,sat}$	I_C = 75 A, V_{GE} = 15 V	T_{vj} = 25 °C		1.42	1.90	V
			T_{vj} = 125 °C		1.53		
			T_{vj} = 150 °C		1.56		
Gate threshold voltage	V_{GEth}	I_C = 0.75 mA, V_{CE} = V_{GE}, T_{vj} = 25 °C		3.25	4	4.75	V
Gate charge	Q_G	V_{GE} = ±15 V, V_{CC} = 400 V			0.315		µC
Internal gate resistor	R_{Gint}	T_{vj} = 25 °C			0		Ω
Input capacitance	C_{ies}	f = 100 kHz, T_{vj} = 25 °C, V_{CE} = 25 V, V_{GE} = 0 V			5.17		nF
Reverse transfer capacitance	C_{res}	f = 100 kHz, T_{vj} = 25 °C, V_{CE} = 25 V, V_{GE} = 0 V			0.018		nF
Collector-emitter cut-off current	I_{CES}	V_{CE} = 650 V, V_{GE} = 0 V	T_{vj} = 25 °C			79	µA
Gate-emitter leakage current	I_{GES}	V_{CE} = 0 V, V_{GE} = 20 V, T_{vj} = 25 °C				100	nA
Turn-on delay time (inductive load)	t_{don}	I_C = 75 A, V_{CC} = 300 V, V_{GE} = ±15 V, R_{Gon} = 10 Ω	T_{vj} = 25 °C		0.022		µs
			T_{vj} = 125 °C		0.023		
			T_{vj} = 150 °C		0.023		
Rise time (inductive load)	t_r	I_C = 75 A, V_{CC} = 300 V, V_{GE} = ±15 V, R_{Gon} = 10 Ω	T_{vj} = 25 °C		0.019		µs
			T_{vj} = 125 °C		0.022		
			T_{vj} = 150 °C		0.022		
Turn-off delay time (inductive load)	t_{doff}	I_C = 75 A, V_{CC} = 300 V, V_{GE} = ±15 V, R_{Goff} = 1.5 Ω	T_{vj} = 25 °C		0.093		µs
			T_{vj} = 125 °C		0.110		
			T_{vj} = 150 °C		0.110		
Fall time (inductive load)	t_f	I_C = 75 A, V_{CC} = 300 V, V_{GE} = ±15 V, R_{Goff} = 1.5 Ω	T_{vj} = 25 °C		0.018		µs
			T_{vj} = 125 °C		0.048		
			T_{vj} = 150 °C		0.062		
Turn-on energy loss per pulse	E_{on}	I_C = 75 A, V_{CC} = 300 V, L_σ = 35 nH, V_{GE} = ±15 V, R_{Gon} = 10 Ω, di/dt = 3100 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		0.85		mJ
			T_{vj} = 125 °C		1.13		
			T_{vj} = 150 °C		1.2		
Turn-off energy loss per pulse	E_{off}	I_C = 75 A, V_{CC} = 300 V, L_σ = 35 nH, V_{GE} = ±15 V, R_{Goff} = 1.5 Ω, dv/dt = 6900 V/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		0.53		mJ
			T_{vj} = 125 °C		0.95		
			T_{vj} = 150 °C		1.05		
Thermal resistance, junction to heat sink	R_{thJH}	per IGBT, Valid with IFX pre-applied Thermal Interface Material, λ_{grease} = 1 W/(m·K)				1.17	K/W

(table continues...)

Table 4 (continued) Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Temperature under switching conditions	$T_{vj\,op}$		-40		150	°C

3 IGBT, T2 / T3

Table 5 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Collector-emitter voltage	V_{CES}		T_{vj} = 25 °C	650	V
Implemented collector current	I_{CN}			150	A
Continuous DC collector current	I_{CDC}	$T_{vj\,max}$ = 175 °C	T_H = 65 °C	85	A
Repetitive peak collector current	I_{CRM}	t_p limited by $T_{vj\,op}$		300	A
Gate-emitter peak voltage	V_{GES}			±20	V

Table 6 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Collector-emitter saturation voltage	$V_{CE\,sat}$	I_C = 150 A, V_{GE} = 15 V	T_{vj} = 25 °C		1.42	1.90	V
			T_{vj} = 125 °C		1.53		
			T_{vj} = 150 °C		1.56		
Gate threshold voltage	V_{GEth}	I_C = 1.5 mA, V_{CE} = V_{GE}, T_{vj} = 25 °C		3.25	4	4.75	V
Gate charge	Q_G	V_{GE} = ±15 V, V_{CC} = 400 V			0.63		µC
Internal gate resistor	R_{Gint}	T_{vj} = 25 °C			0		Ω
Input capacitance	C_{ies}	f = 100 kHz, T_{vj} = 25 °C, V_{CE} = 25 V, V_{GE} = 0 V			10.34		nF
Reverse transfer capacitance	C_{res}	f = 100 kHz, T_{vj} = 25 °C, V_{CE} = 25 V, V_{GE} = 0 V			0.036		nF
Collector-emitter cut-off current	I_{CES}	V_{CE} = 650 V, V_{GE} = 0 V	T_{vj} = 25 °C			93	µA
Gate-emitter leakage current	I_{GES}	V_{CE} = 0 V, V_{GE} = 20 V, T_{vj} = 25 °C				100	nA
Turn-on delay time (inductive load)	t_{don}	I_C = 150 A, V_{CC} = 300 V, V_{GE} = ±15 V, R_{Gon} = 20 Ω	T_{vj} = 25 °C		0.072		µs
			T_{vj} = 125 °C		0.065		
			T_{vj} = 150 °C		0.064		

(table continues...)

Table 6 (continued) Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Rise time (inductive load)	t_r	I_C = 150 A, V_{CC} = 300 V, V_{GE} = ±15 V, R_{Gon} = 20 Ω	T_{vj} = 25 °C		0.053		µs
			T_{vj} = 125 °C		0.059		
			T_{vj} = 150 °C		0.060		
Turn-off delay time (inductive load)	t_{doff}	I_C = 150 A, V_{CC} = 300 V, V_{GE} = ±15 V, R_{Goff} = 56 Ω	T_{vj} = 25 °C		0.660		µs
			T_{vj} = 125 °C		0.690		
			T_{vj} = 150 °C		0.700		
Fall time (inductive load)	t_f	I_C = 150 A, V_{CC} = 300 V, V_{GE} = ±15 V, R_{Goff} = 56 Ω	T_{vj} = 25 °C		0.032		µs
			T_{vj} = 125 °C		0.035		
			T_{vj} = 150 °C		0.040		
Turn-on energy loss per pulse	E_{on}	I_C = 150 A, V_{CC} = 300 V, L_σ = 35 nH, V_{GE} = ±15 V, R_{Gon} = 20 Ω, di/dt = 2300 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		3.85		mJ
			T_{vj} = 125 °C		4.7		
			T_{vj} = 150 °C		4.76		
Turn-off energy loss per pulse	E_{off}	I_C = 150 A, V_{CC} = 300 V, L_σ = 35 nH, V_{GE} = ±15 V, R_{Goff} = 56 Ω, dv/dt = 3700 V/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		2.73		mJ
			T_{vj} = 125 °C		2.94		
			T_{vj} = 150 °C		3.07		
Thermal resistance, junction to heat sink	R_{thJH}	per IGBT, Valid with IFX pre-applied Thermal Interface Material, λ_{grease} = 1 W/(m·K)				0.708	K/W
Temperature under switching conditions	$T_{vj\,op}$			-40		150	°C

4 Diode, D1 / D4

Table 7 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Repetitive peak reverse voltage	V_{RRM}		T_{vj} = 25 °C	650	V
Implemented forward current	I_{FN}			225	A
Continuous DC forward current	I_F			150	A
Repetitive peak forward current	I_{FRM}	t_P = 1 ms		450	A
I^2t - value	I^2t	t_P = 10 ms, V_R = 0 V	T_{vj} = 125 °C	3850	A^2s
			T_{vj} = 150 °C	3680	

Table 8 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Forward voltage	V_F	I_F = 150 A, V_{GE} = 0 V	T_{vj} = 25 °C		1.34	1.73	V
			T_{vj} = 125 °C		1.29		
			T_{vj} = 150 °C		1.25		
Peak reverse recovery current	I_{RM}	V_{CC} = 300 V, I_F = 150 A, V_{GE} = -15 V, -di$_F$/dt = 2300 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		51		A
			T_{vj} = 125 °C		84		
			T_{vj} = 150 °C		92		
Recovered charge	Q_r	V_{CC} = 300 V, I_F = 150 A, V_{GE} = -15 V, -di$_F$/dt = 2300 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		3.72		µC
			T_{vj} = 125 °C		8.65		
			T_{vj} = 150 °C		10.2		
Reverse recovery energy	E_{rec}	V_{CC} = 300 V, I_F = 150 A, V_{GE} = -15 V, -di$_F$/dt = 2300 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		0.44		mJ
			T_{vj} = 125 °C		1.1		
			T_{vj} = 150 °C		1.4		
Thermal resistance, junction to heat sink	R_{thJH}	per diode, Valid with IFX pre-applied Thermal Interface Material, λ_{grease} = 1 W/(m·K)				0.718	K/W
Temperature under switching conditions	$T_{vj\,op}$			-40		150	°C

5 Diode, D2 / D3

Table 9 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Repetitive peak reverse voltage	V_{RRM}		T_{vj} = 25 °C	650	V
Implemented forward current	I_{FN}			225	A
Continuous DC forward current	I_F			150	A
Repetitive peak forward current	I_{FRM}	t_P = 1 ms		450	A
I^2t - value	I^2t	t_P = 10 ms, V_R = 0 V	T_{vj} = 125 °C	3850	A^2s
			T_{vj} = 150 °C	3680	

Table 10 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Forward voltage	V_F	I_F = 150 A, V_{GE} = 0 V	T_{vj} = 25 °C		1.34	1.73	V
			T_{vj} = 125 °C		1.29		
			T_{vj} = 150 °C		1.25		
Peak reverse recovery current	I_{RM}	V_{CC} = 300 V, I_F = 150 A, V_{GE} = -15 V, -di$_F$/dt = 2300 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		51		A
			T_{vj} = 125 °C		84		
			T_{vj} = 150 °C		92		
Recovered charge	Q_r	V_{CC} = 300 V, I_F = 150 A, V_{GE} = -15 V, -di$_F$/dt = 2300 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		3.72		µC
			T_{vj} = 125 °C		8.65		
			T_{vj} = 150 °C		10.2		
Reverse recovery energy	E_{rec}	V_{CC} = 300 V, I_F = 150 A, V_{GE} = -15 V, -di$_F$/dt = 2300 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		0.44		mJ
			T_{vj} = 125 °C		1.1		
			T_{vj} = 150 °C		1.4		
Thermal resistance, junction to heat sink	R_{thJH}	per diode, Valid with IFX pre-applied Thermal Interface Material, λ_{grease} = 1 W/(m·K)				0.718	K/W
Temperature under switching conditions	$T_{vj\,op}$			-40		150	°C

6 Diode, D5 / D6

Table 11 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Repetitive peak reverse voltage	V_{RRM}		T_{vj} = 25 °C	650	V
Implemented forward current	I_{FN}			150	A
Continuous DC forward current	I_F			75	A
Repetitive peak forward current	I_{FRM}	t_P = 1 ms		300	A
I^2t - value	I^2t	t_P = 10 ms, V_R = 0 V	T_{vj} = 125 °C	1810	A^2s
			T_{vj} = 150 °C	1720	

Table 12 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Forward voltage	V_F	I_F = 75 A, V_{GE} = 0 V	T_{vj} = 25 °C		1.25	1.57	V
			T_{vj} = 125 °C		1.17		
			T_{vj} = 150 °C		1.13		
Peak reverse recovery current	I_{RM}	V_{CC} = 300 V, I_F = 75 A, V_{GE} = -15 V, -di$_F$/dt = 3100 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		70		A
			T_{vj} = 125 °C		110		
			T_{vj} = 150 °C		121		
Recovered charge	Q_r	V_{CC} = 300 V, I_F = 75 A, V_{GE} = -15 V, -di$_F$/dt = 3100 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		2.69		µC
			T_{vj} = 125 °C		5.67		
			T_{vj} = 150 °C		6.59		
Reverse recovery energy	E_{rec}	V_{CC} = 300 V, I_F = 75 A, V_{GE} = -15 V, -di$_F$/dt = 3100 A/µs (T_{vj} = 150 °C)	T_{vj} = 25 °C		0.37		mJ
			T_{vj} = 125 °C		1.03		
			T_{vj} = 150 °C		1.27		
Thermal resistance, junction to heat sink	R_{thJH}	per diode, Valid with IFX pre-applied Thermal Interface Material, λ_{grease} = 1 W/(m·K)				1.00	K/W
Temperature under switching conditions	$T_{vj\,op}$			-40		150	°C

7 NTC-Thermistor

Table 13 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Rated resistance	R_{25}	T_{NTC} = 25 °C		5		kΩ
Deviation of R_{100}	$\Delta R/R$	T_{NTC} = 100 °C, R_{100} = 493 Ω	-5		5	%
Power dissipation	P_{25}	T_{NTC} = 25 °C			20	mW
B-value	$B_{25/50}$	$R_2 = R_{25} \exp[B_{25/50}(1/T_2-1/(298{,}15\ K))]$		3375		K
B-value	$B_{25/80}$	$R_2 = R_{25} \exp[B_{25/80}(1/T_2-1/(298{,}15\ K))]$		3411		K
B-value	$B_{25/100}$	$R_2 = R_{25} \exp[B_{25/100}(1/T_2-1/(298{,}15\ K))]$		3433		K


***Note**: For an analytical description of the NTC characteristics please refer to AN2009-10, chapter 4.*

8 Characteristics diagrams

Output characteristic (typical), IGBT, T1 / T4

$I_C = f(V_{CE})$


V_{GE} = 15 V

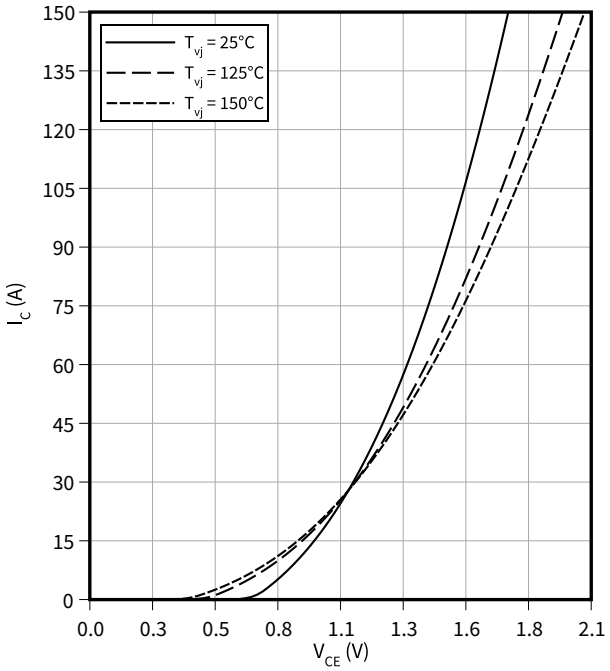

Output characteristic field (typical), IGBT, T1 / T4

$I_C = f(V_{CE})$


T_{vj} = 150 °C

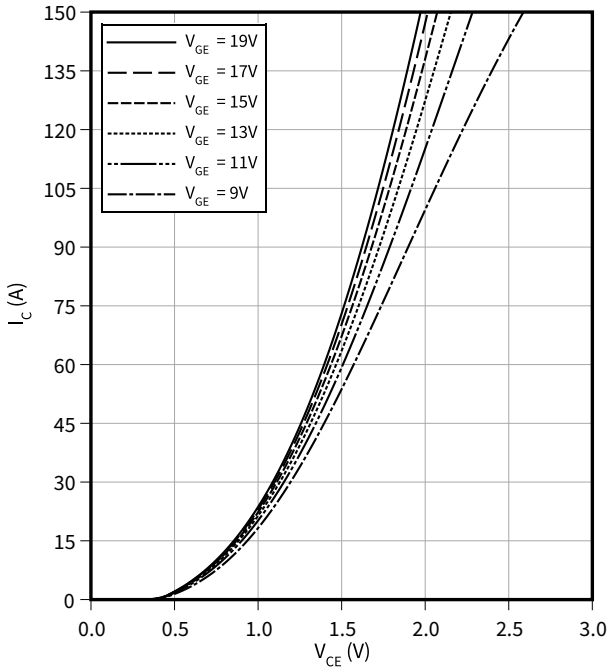

Transfer characteristic (typical), IGBT, T1 / T4

$I_C = f(V_{GE})$


V_{CE} = 20 V

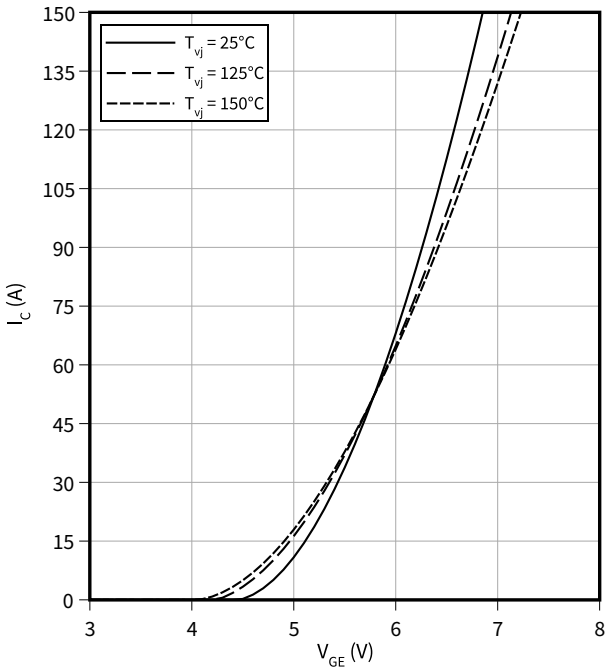

Gate charge characteristic (typical), IGBT, T1 / T4

$V_{GE} = f(Q_G)$


I_C = 75 A, T_{vj} = 25 °C

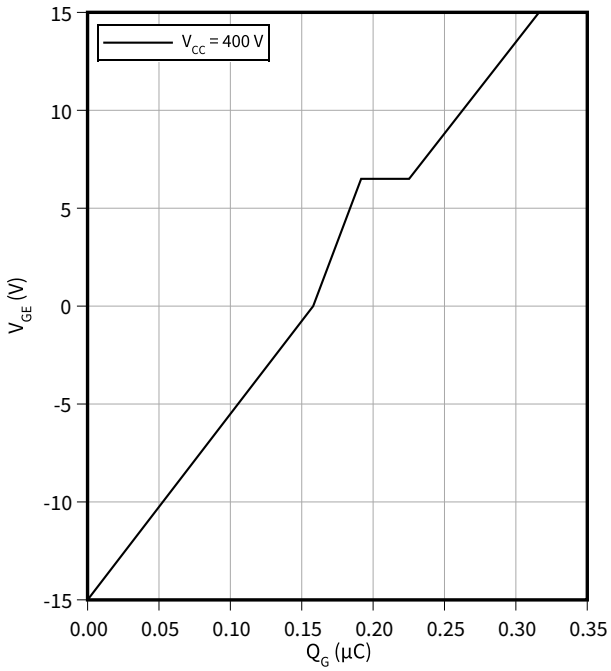

Capacity characteristic (typical), IGBT, T1 / T4

$C = f(V_{CE})$


$f = 100\ kHz$, $V_{GE} = 0\ V$, $T_{vj} = 25\ °C$

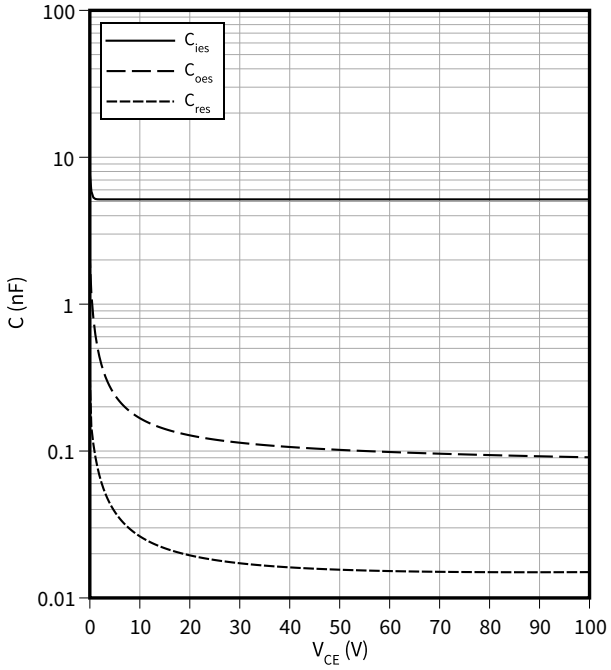

Switching times (typical), IGBT, T1 / T4

$t = f(I_C)$


$R_{Goff} = 1.5\ \Omega$, $R_{Gon} = 10\ \Omega$, $V_{CC} = 300\ V$, $V_{GE} = \pm 15\ V$, $T_{vj} = 150\ °C$

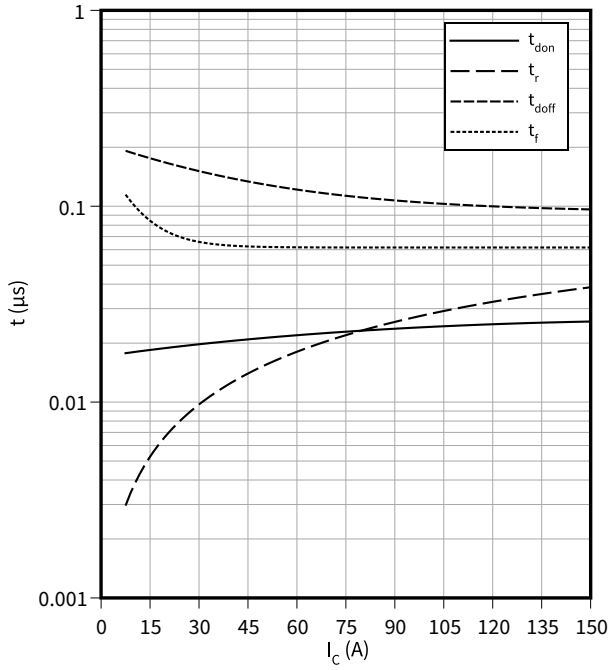

Switching times (typical), IGBT, T1 / T4

$t = f(R_G)$


$I_C = 75\ A$, $V_{CC} = 300\ V$, $V_{GE} = \pm 15\ V$, $T_{vj} = 150\ °C$

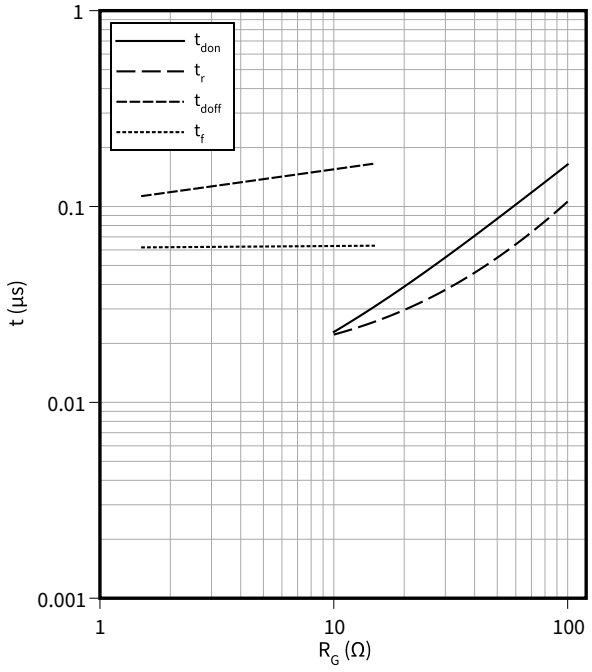

Switching losses (typical), IGBT, T1 / T4

$E = f(I_C)$


$R_{Goff} = 1.5\ \Omega$, $R_{Gon} = 10\ \Omega$, $V_{CC} = 300\ V$, $V_{GE} = \pm 15\ V$

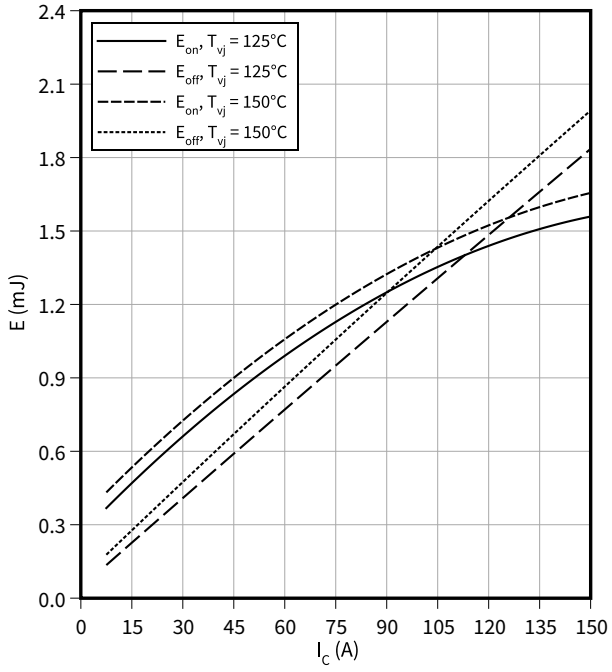

Switching losses (typical), IGBT, T1 / T4

$E = f(R_G)$


$I_C = 75\ A$, $V_{CC} = 300\ V$, $V_{GE} = \pm 15\ V$

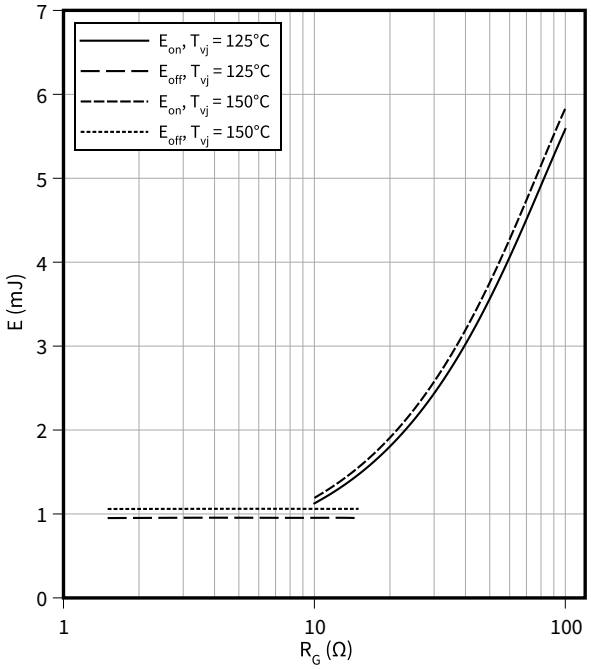

Reverse bias safe operating area (RBSOA), IGBT, T1 / T4


$I_C = f(V_{CE})$

$R_{Goff} = 1.5\ \Omega$, $V_{GE} = \pm 15\ V$, $T_{vj} = 150\ °C$

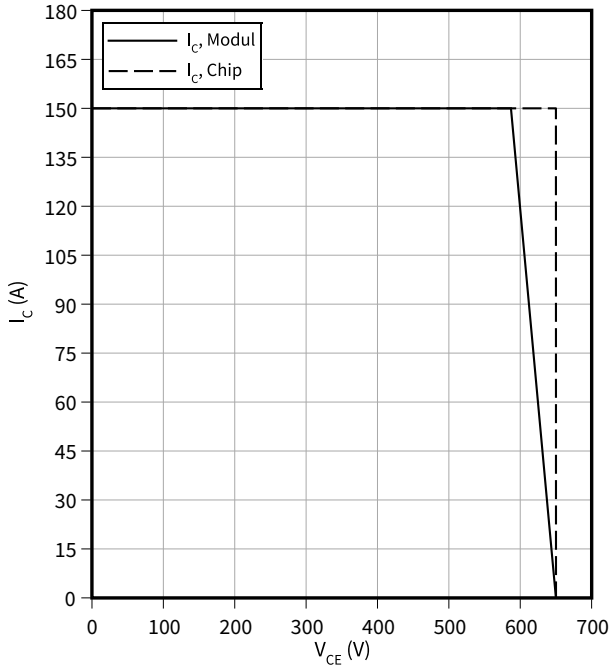

Transient thermal impedance, IGBT, T1 / T4


$Z_{th} = f(t)$

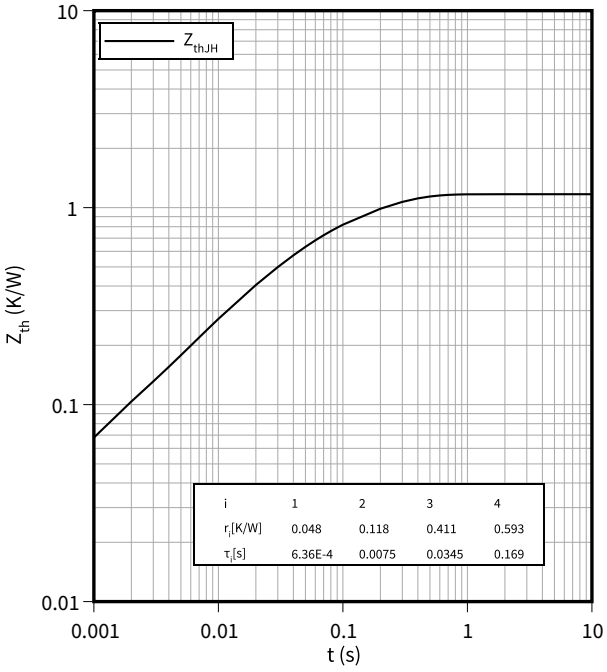

Output characteristic (typical), IGBT, T2 / T3


$I_C = f(V_{CE})$

$V_{GE} = 15\ V$

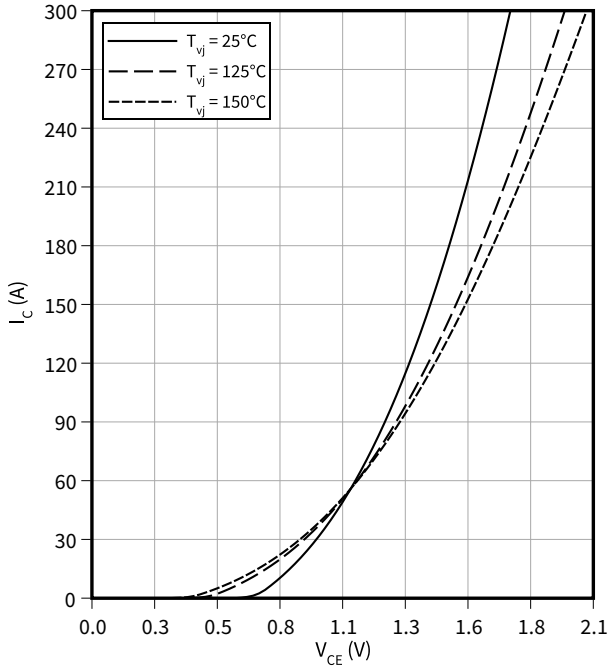


Output characteristic field (typical), IGBT, T2 / T3

$I_C = f(V_{CE})$
$T_{vj} = 150\ °C$

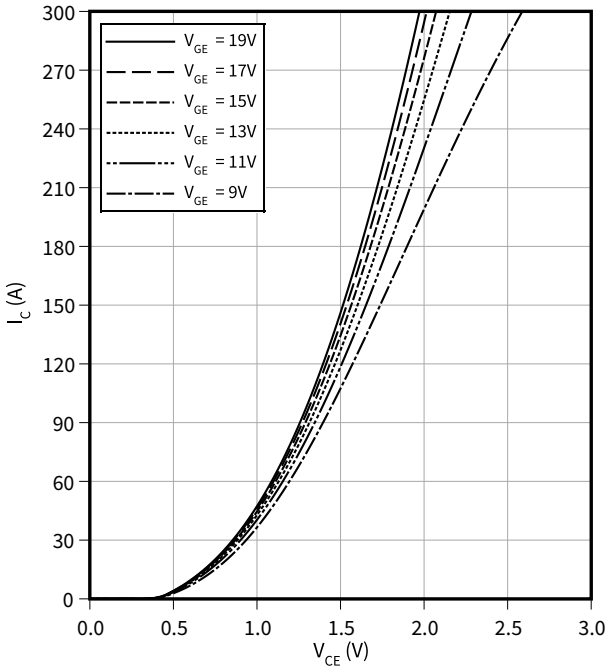


Transfer characteristic (typical), IGBT, T2 / T3

$I_C = f(V_{GE})$
$V_{CE} = 20\ V$

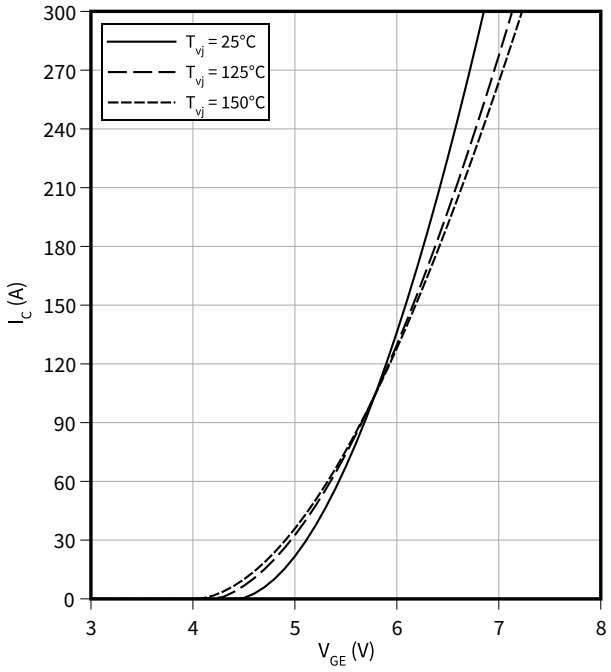


Gate charge characteristic (typical), IGBT, T2 / T3

$V_{GE} = f(Q_G)$
$I_C = 150\ A,\ T_{vj} = 25\ °C$

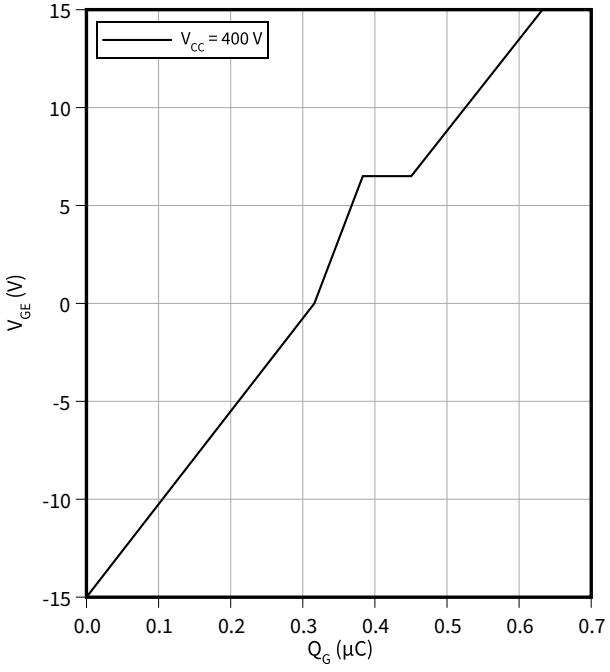

Capacity characteristic (typical), IGBT, T2 / T3


$C = f(V_{CE})$
$f = 100\ kHz,\ V_{GE} = 0\ V,\ T_{vj} = 25\ °C$

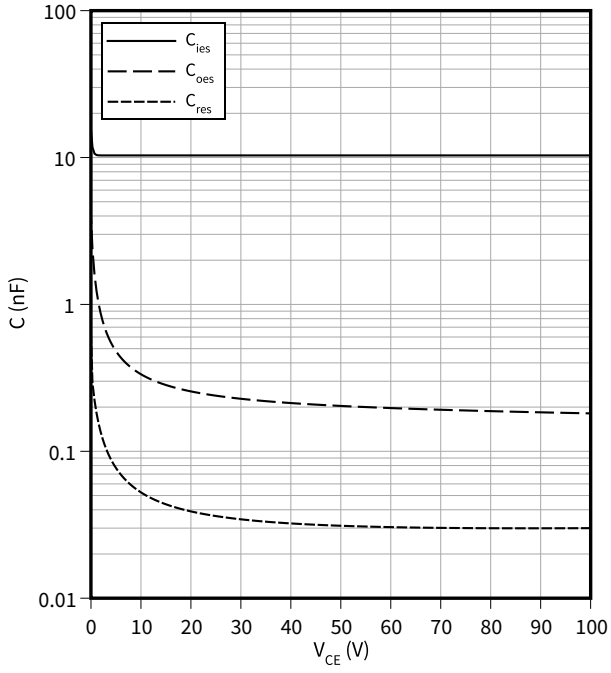

Switching times (typical), IGBT, T2 / T3

$t = f(I_C)$


$R_{Goff} = 56\ \Omega$, $R_{Gon} = 20\ \Omega$, $V_{CC} = 300$ V, $V_{GE} = \pm 15$ V, $T_{vj} = 150$ °C

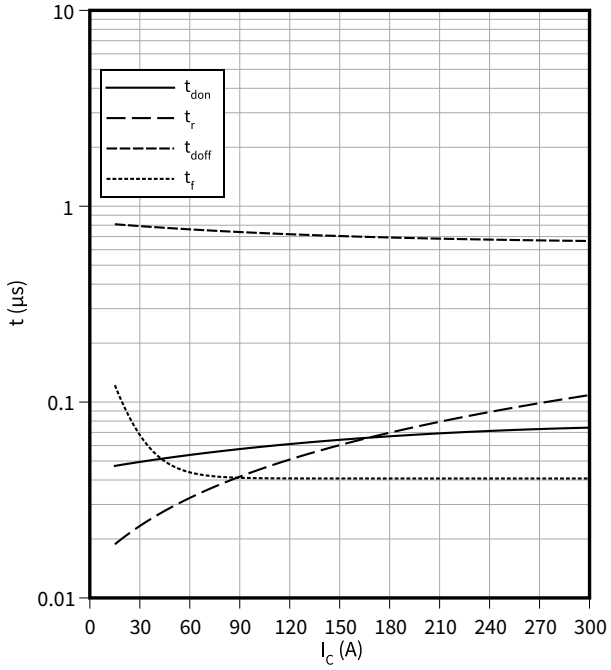

Switching times (typical), IGBT, T2 / T3

$t = f(R_G)$


$I_C = 150$ A, $V_{CC} = 300$ V, $V_{GE} = \pm 15$ V, $T_{vj} = 150$ °C

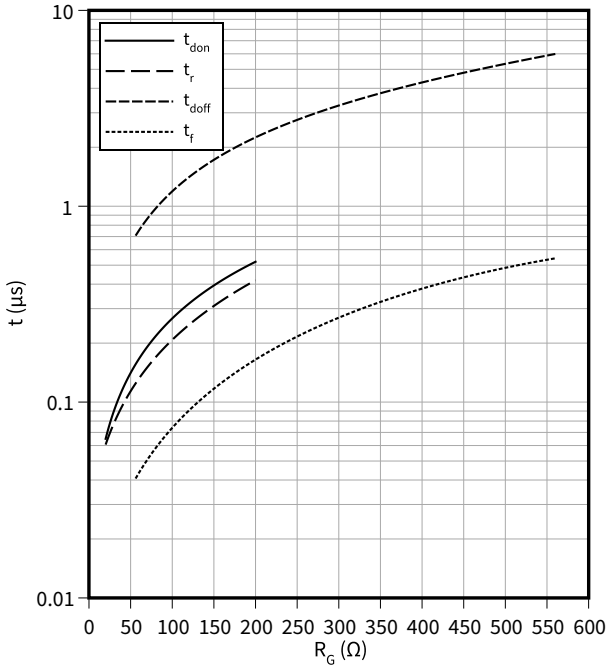

Switching losses (typical), IGBT, T2 / T3

$E = f(I_C)$


$R_{Goff} = 56\ \Omega$, $R_{Gon} = 20\ \Omega$, $V_{CC} = 300$ V, $V_{GE} = \pm 15$ V

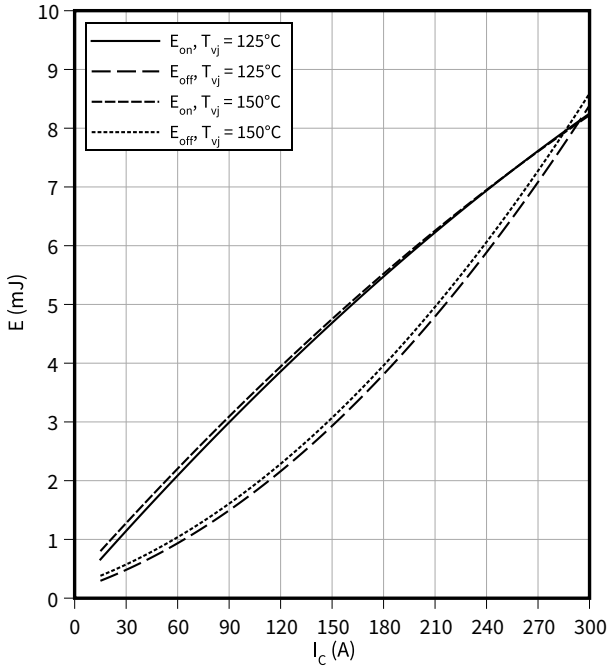

Switching losses (typical), IGBT, T2 / T3

$E = f(R_G)$


$I_C = 150$ A, $V_{CC} = 300$ V, $V_{GE} = \pm 15$ V

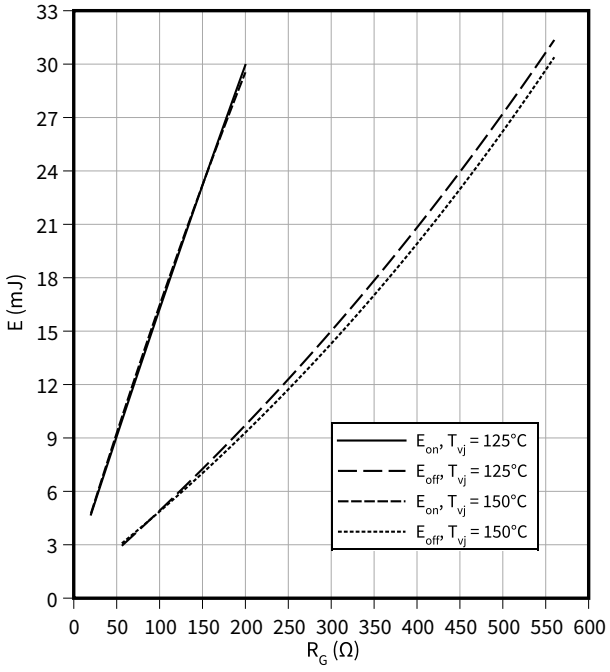

Reverse bias safe operating area (RBSOA), IGBT, T2 / T3


$I_C = f(V_{CE})$

$R_{Goff} = 56\ \Omega$, $V_{GE} = \pm 15$ V, $T_{vj} = 150$ °C

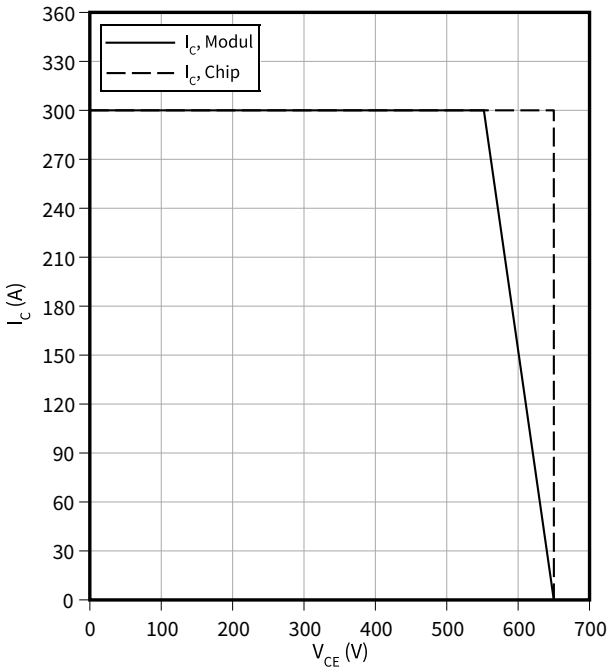


Transient thermal impedance, IGBT, T2 / T3

$Z_{th} = f(t)$

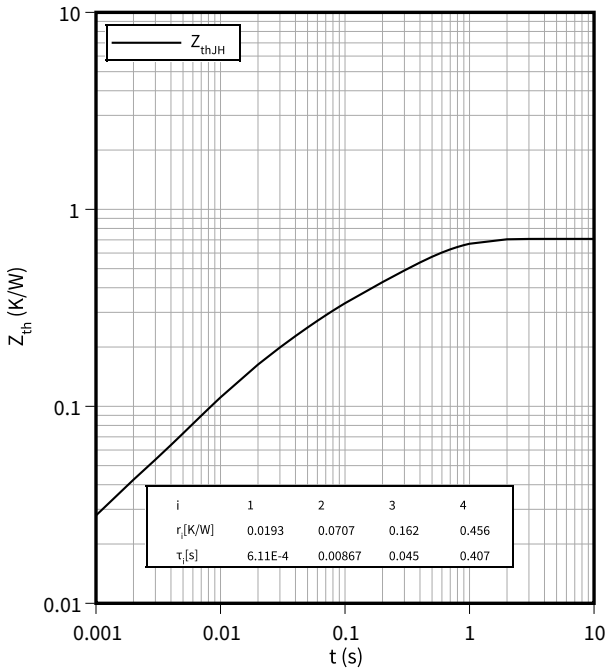

Forward characteristic (typical), Diode, D1 / D4


$I_F = f(V_F)$

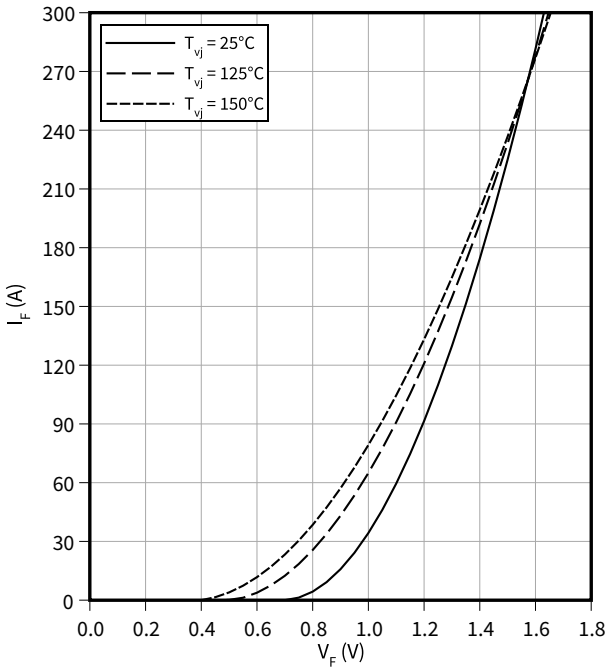

Switching losses (typical), Diode, D1 / D4

$E_{rec} = f(I_F)$


$R_{Gon} = 20\ \Omega$, $V_{CE} = 300$ V

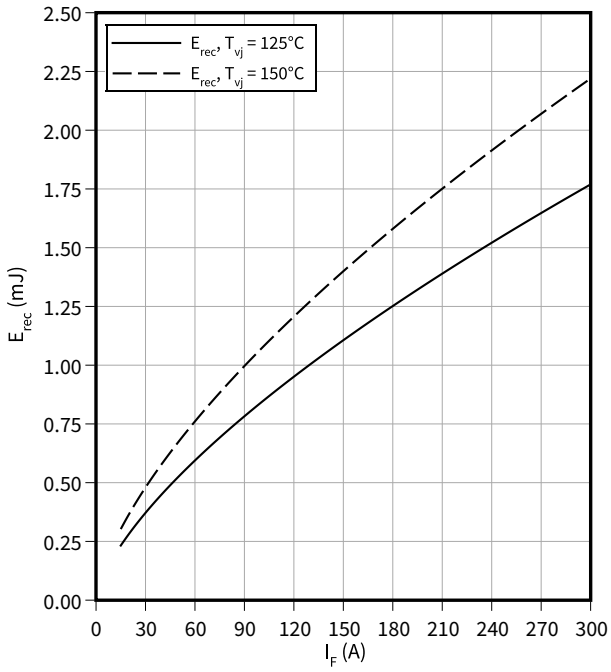

Switching losses (typical), Diode, D1 / D4


$E_{rec} = f(R_G)$

$V_{CE} = 300\ V$, $I_F = 150\ A$

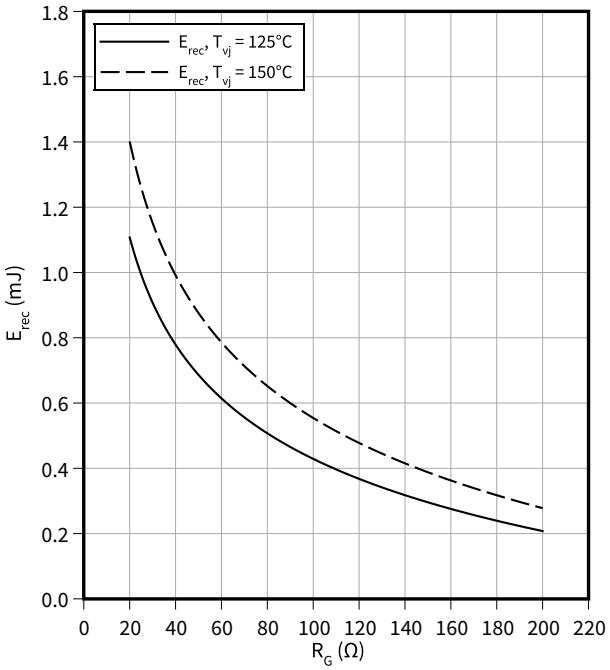


Transient thermal impedance, Diode, D1 / D4

$Z_{th} = f(t)$

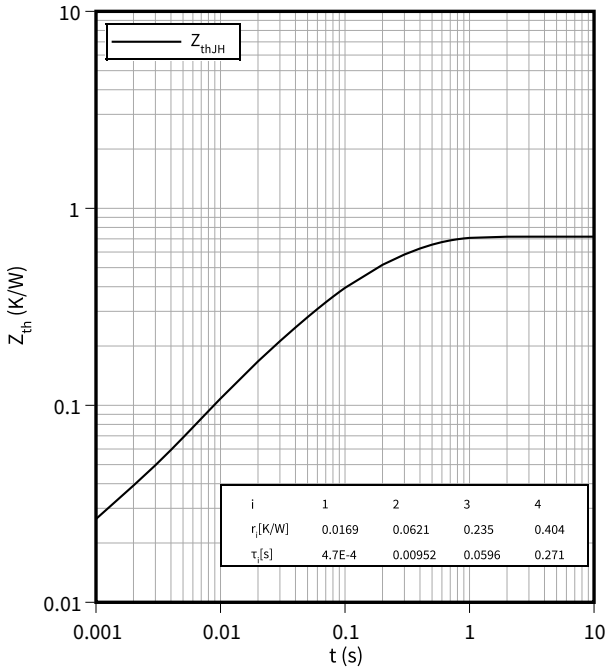

Forward characteristic (typical), Diode, D2 / D3


$I_F = f(V_F)$

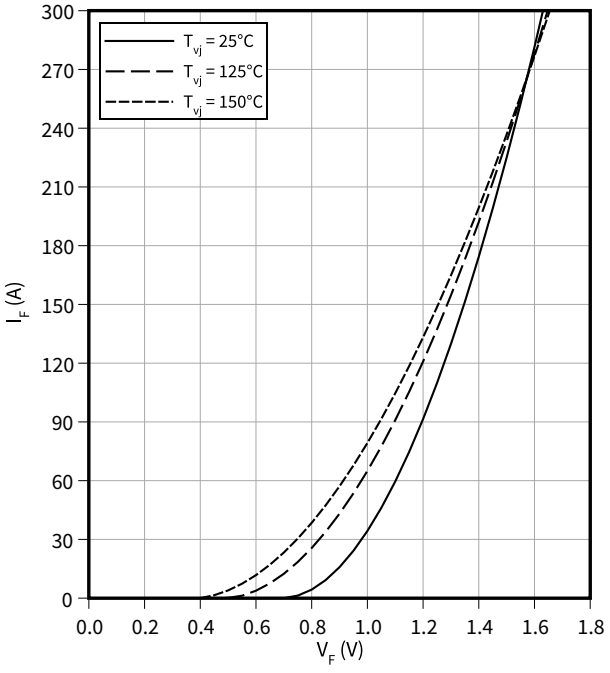

Switching losses (typical), Diode, D2 / D3

$E_{rec} = f(I_F)$


$R_{Gon} = 20\ \Omega$, $V_{CE} = 300\ V$

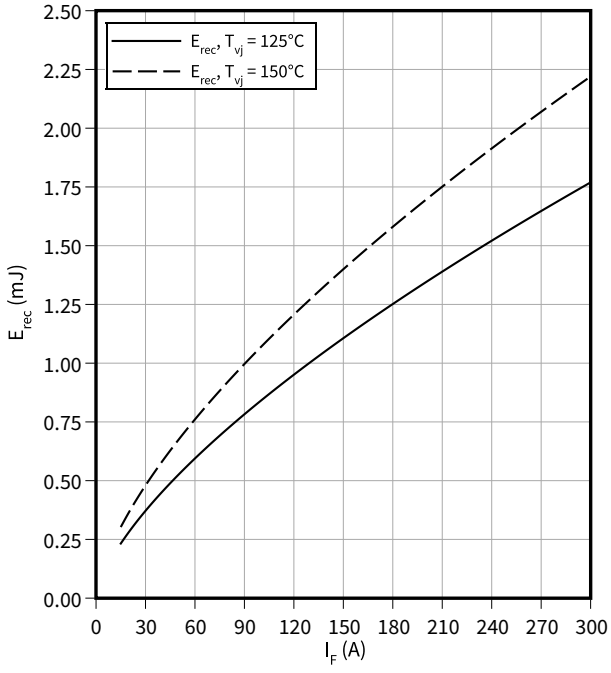

Switching losses (typical), Diode, D2 / D3


$E_{rec} = f(R_G)$

$V_{CE} = 300\ V$, $I_F = 150\ A$

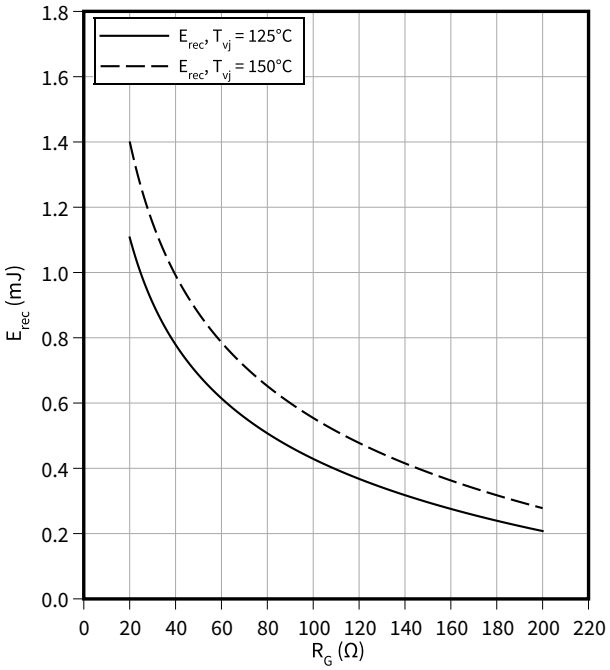


Transient thermal impedance, Diode, D2 / D3

$Z_{th} = f(t)$

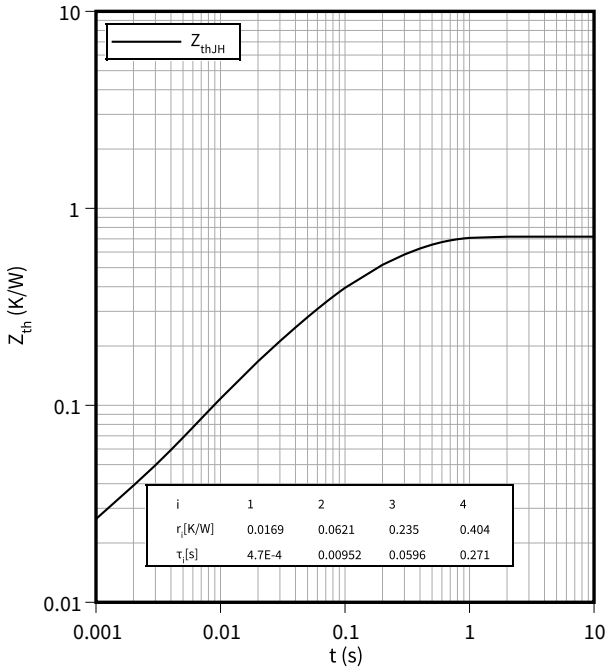

Forward characteristic (typical), Diode, D5 / D6


$I_F = f(V_F)$

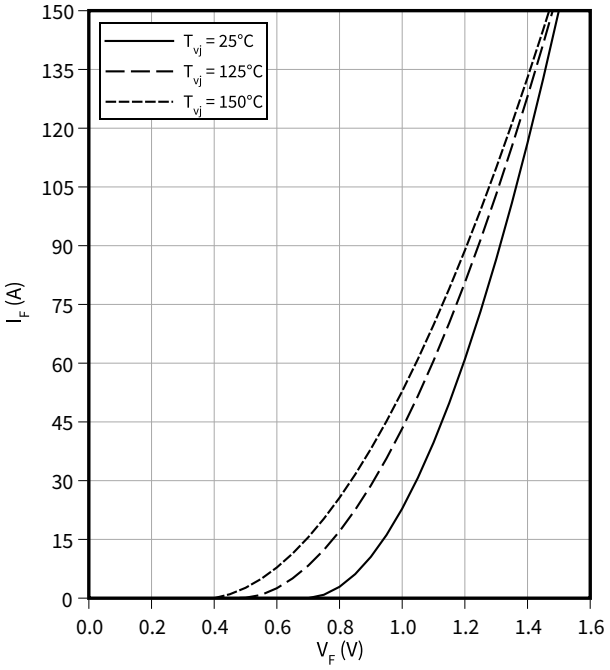

Switching losses (typical), Diode, D5 / D6

$E_{rec} = f(I_F)$


$R_{Gon} = 10\ \Omega$, $V_{CE} = 300\ V$

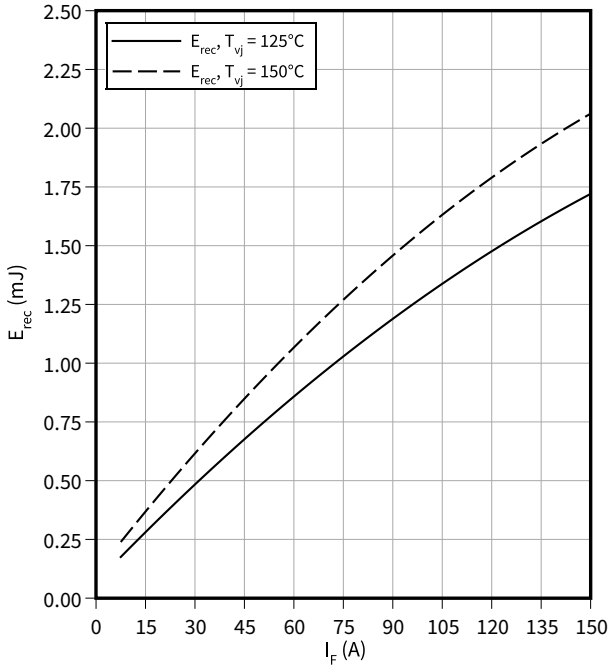

Switching losses (typical), Diode, D5 / D6


$E_{rec} = f(R_G)$

$V_{CE} = 300\ V$, $I_F = 75\ A$

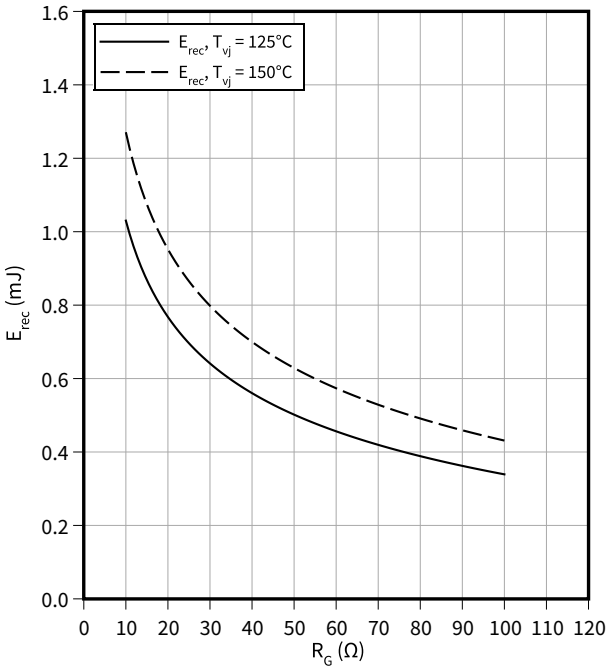


Transient thermal impedance, Diode, D5 / D6

$Z_{th} = f(t)$

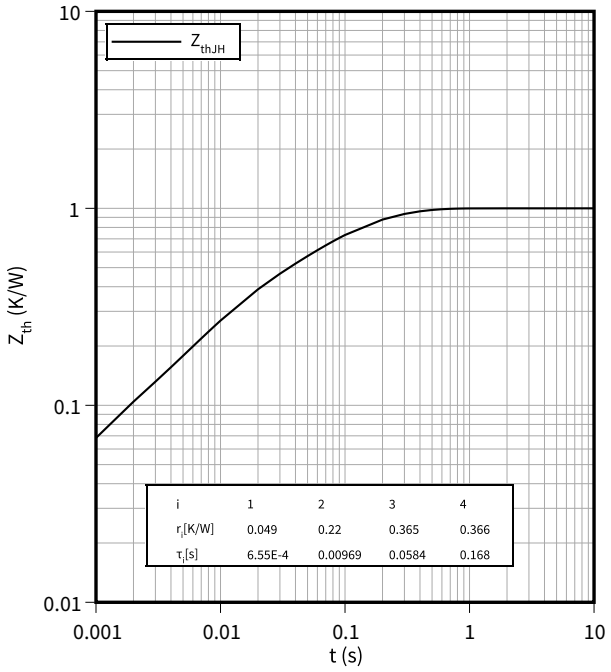

Temperature characteristic (typical), NTC-Thermistor

$R = f(T_{NTC})$

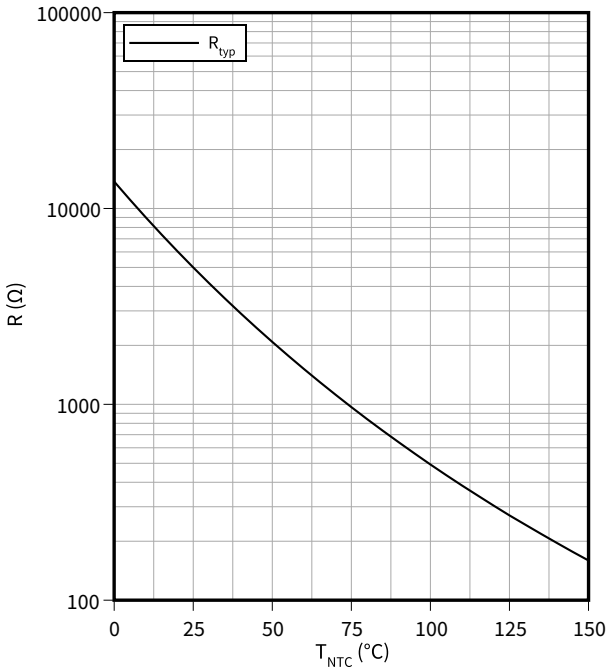

9 Circuit diagram

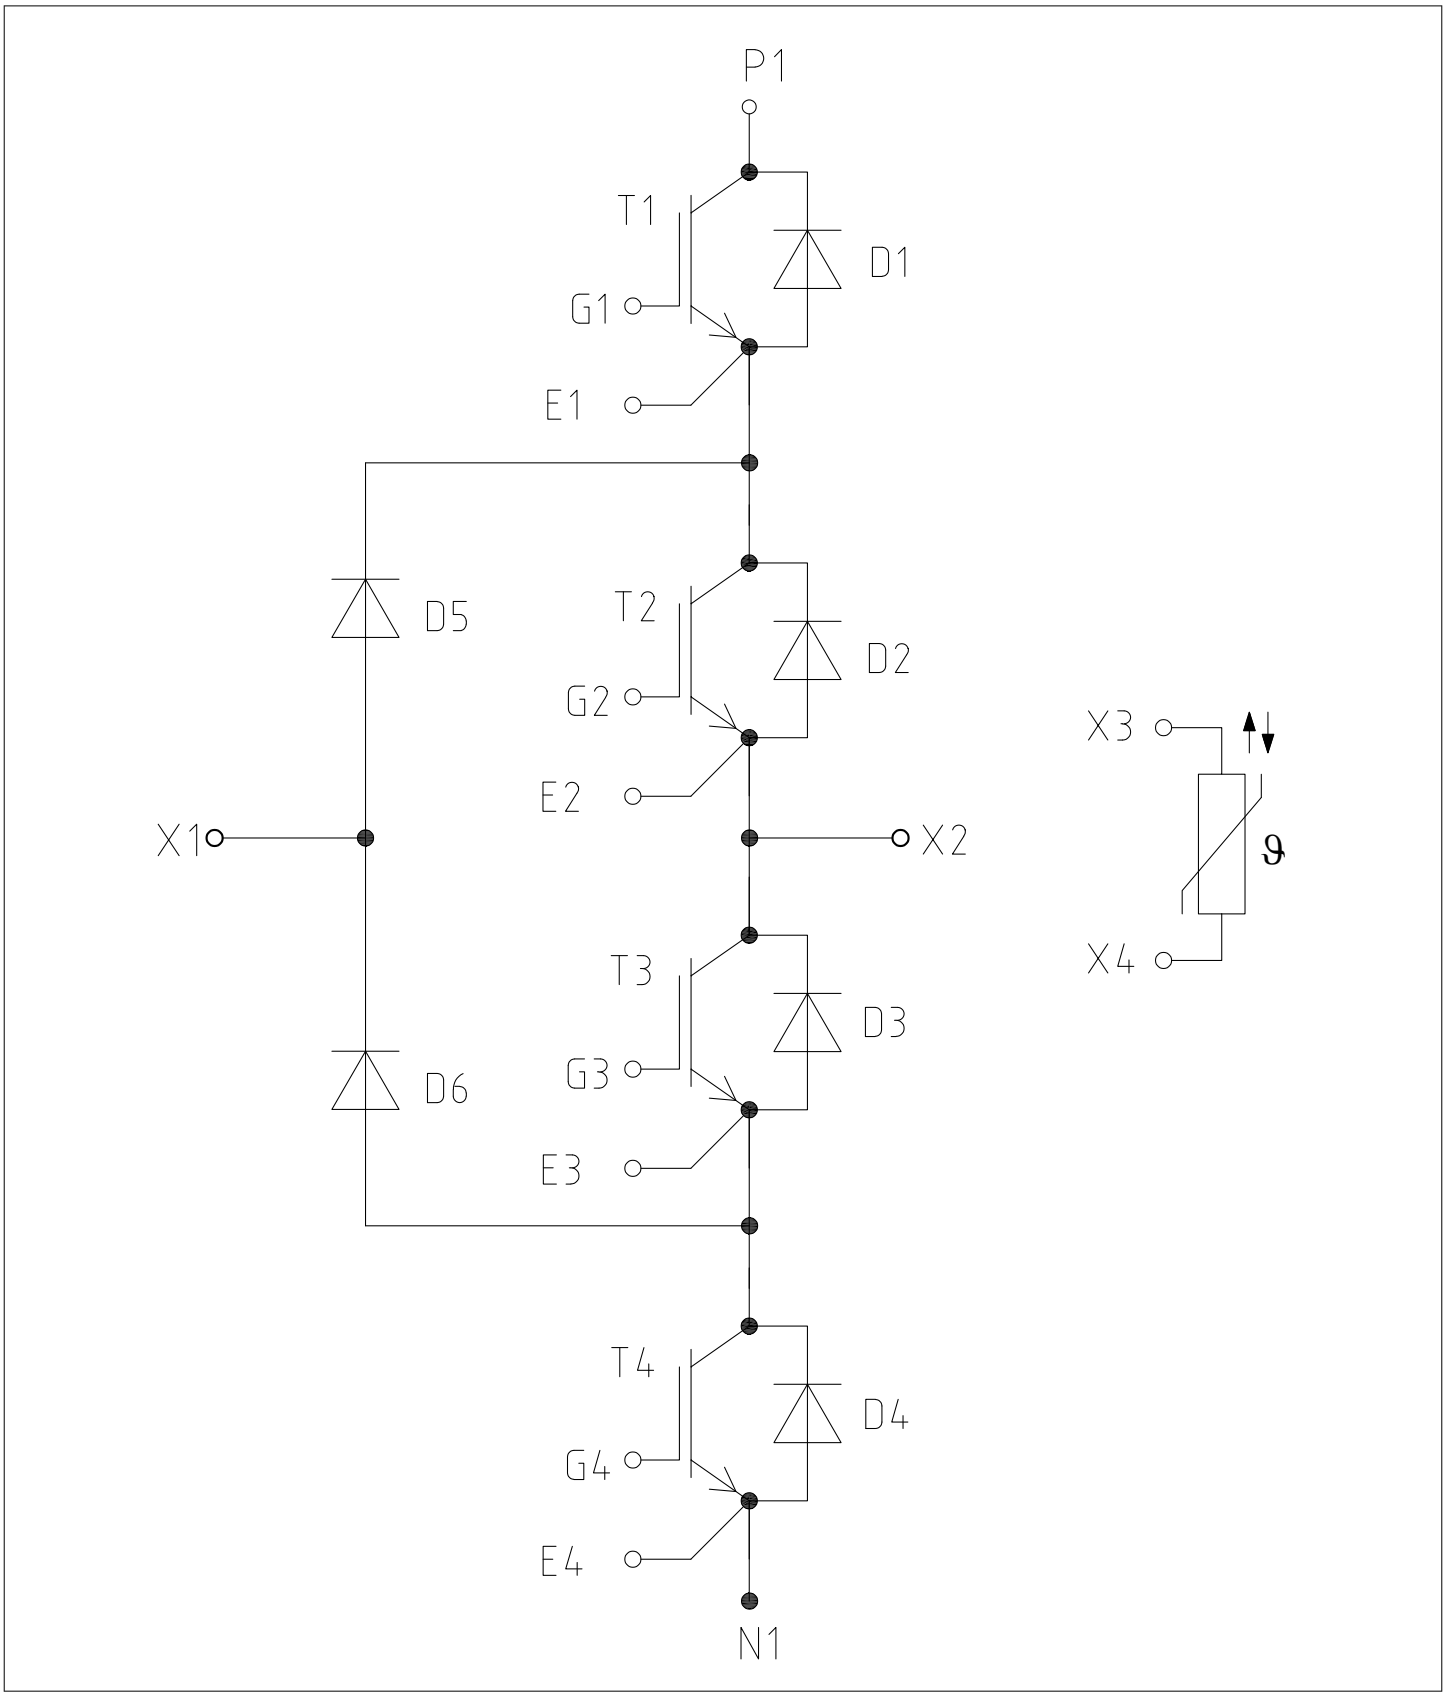


Figure 1

10 Package outlines

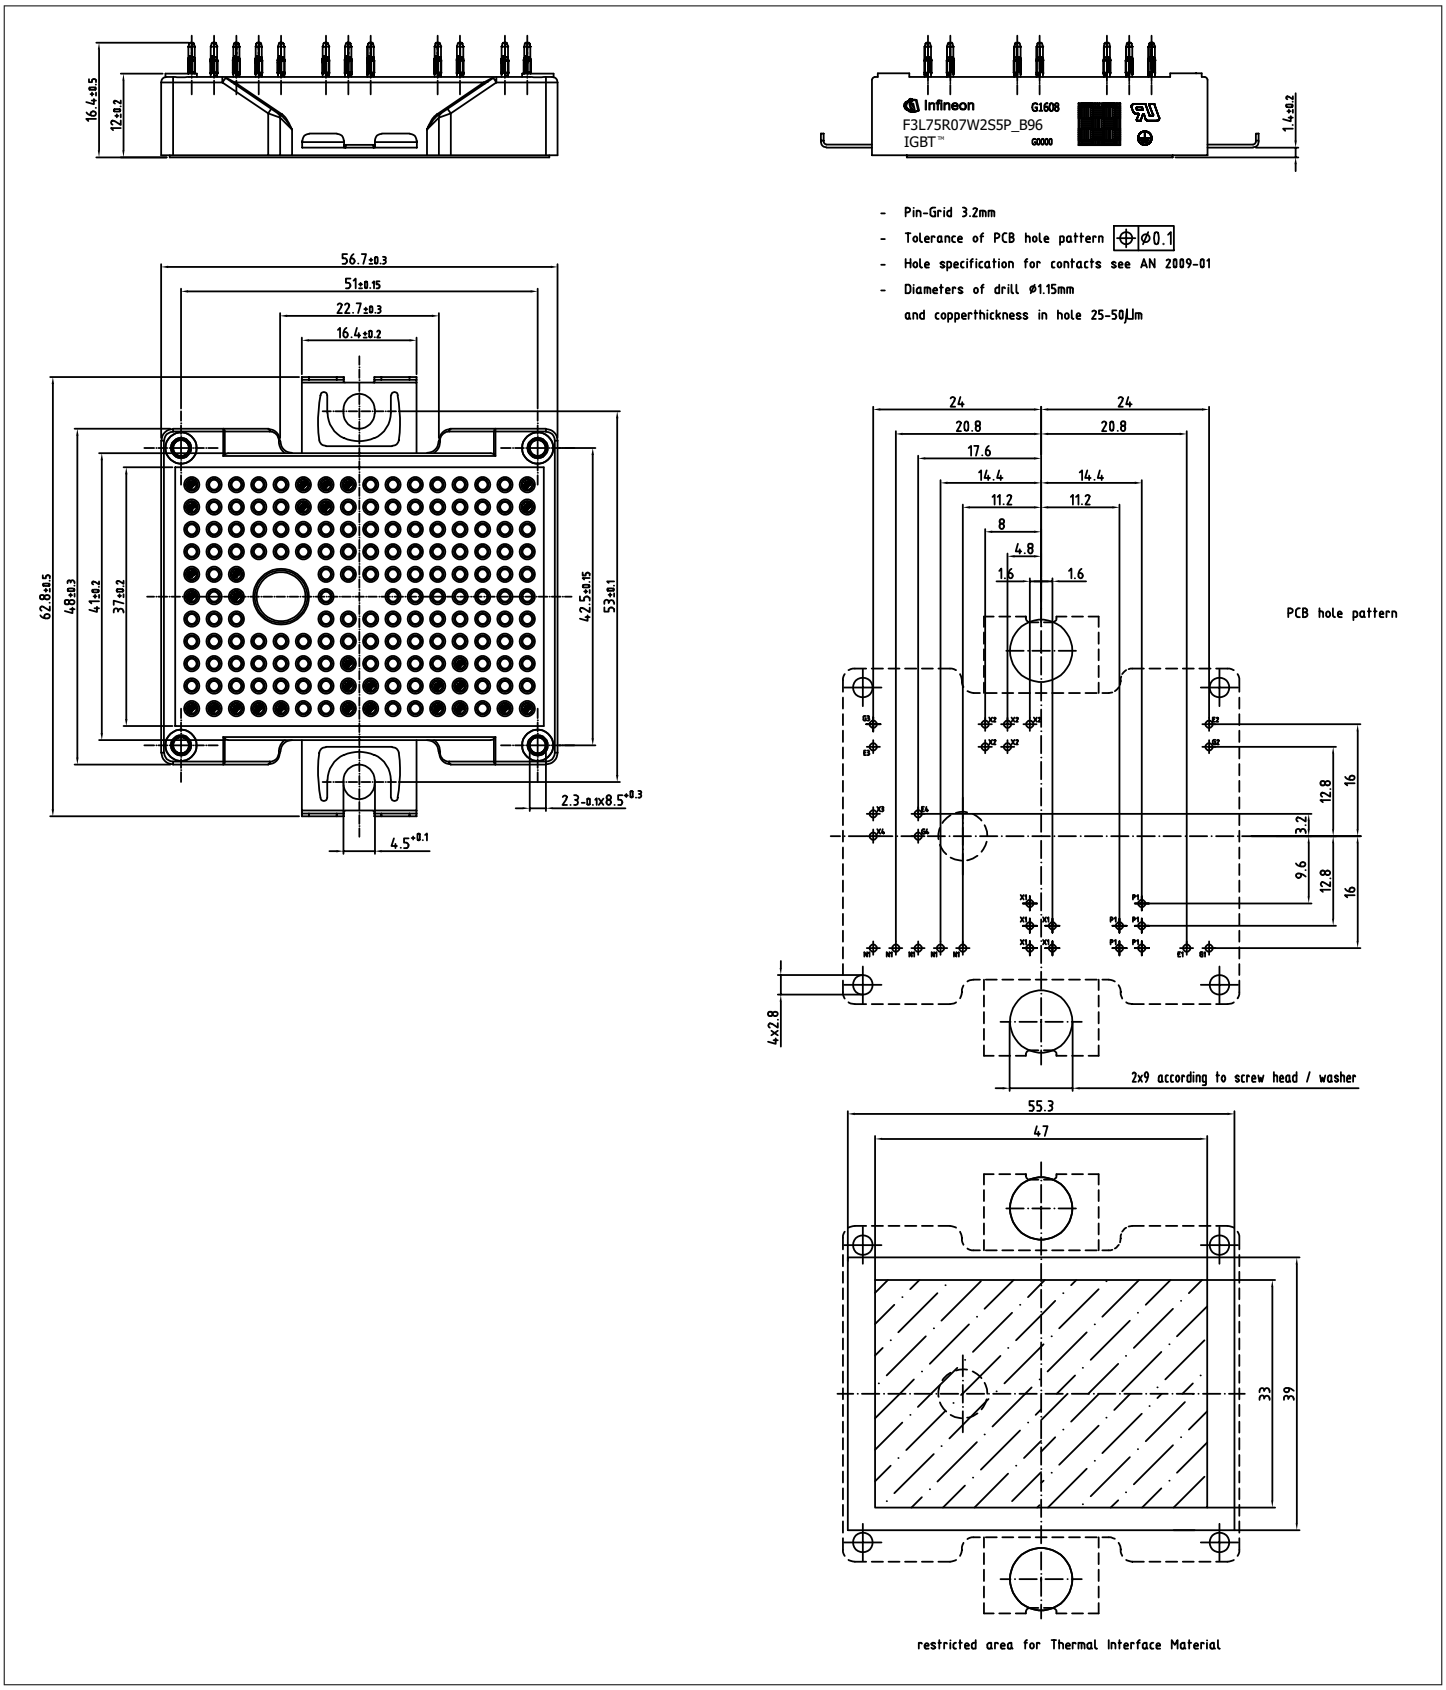


Figure 2

11 Module label code

Module label code			
Code format	Data Matrix		Barcode Code128
Encoding	ASCII text		Code Set A
Symbol size	16x16		23 digits
Standard	IEC24720 and IEC16022		IEC8859-1
Code content	*Content* Module serial number Module material number Production order number Date code (production year) Date code (production week)	*Digit* 1 – 5 6 - 11 12 - 19 20 – 21 22 – 23	*Example* 71549 142846 55054991 15 30
Example	71549142846550549911530		71549142846550549911530

Figure 3

Revision history

Document version	Date of release	Description of changes
0.10	2023-10-30	Initial version
1.00	2024-01-18	Final datasheet

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2024-01-18

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2024 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-ABH835-002

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.