
ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

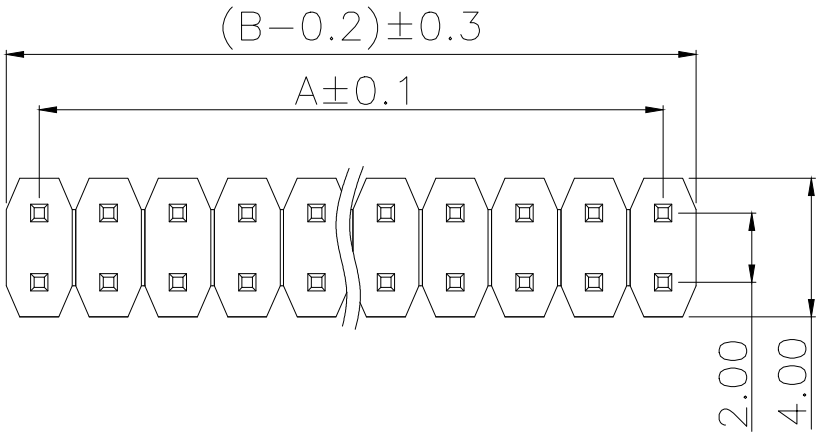


SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 500V
Operation Temperature: −40° to+105°
Contact Material: Brass
Standard: PA6T
Insrlator Material: Polyester(UL 94V−0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for30−60seconds
(260°C for5seconds)

P/N	PIN	DIM.A	DIM.B
PH2.0−01−01PZS	2*1	0.00	2.00
PH2.0−01−02PZS	2*2	2.00	4.00
PH2.0−01−03PZS	2*3	4.00	6.00
PH2.0−01−04PZS	2*4	6.00	8.00
PH2.0−01−05PZS	2*5	8.00	10.00
PH2.0−01−06PZS	2*6	10.00	12.00
PH2.0−01−07PZS	2*7	12.00	14.00
PH2.0−01−08PZS	2*8	14.00	16.00
PH2.0−01−09PZS	2*9	16.00	18.00
.....	.....	.....	.....
PH2.0−01−40PZS	2*40	(PIN−1)x2.0	(PIN)x2.0

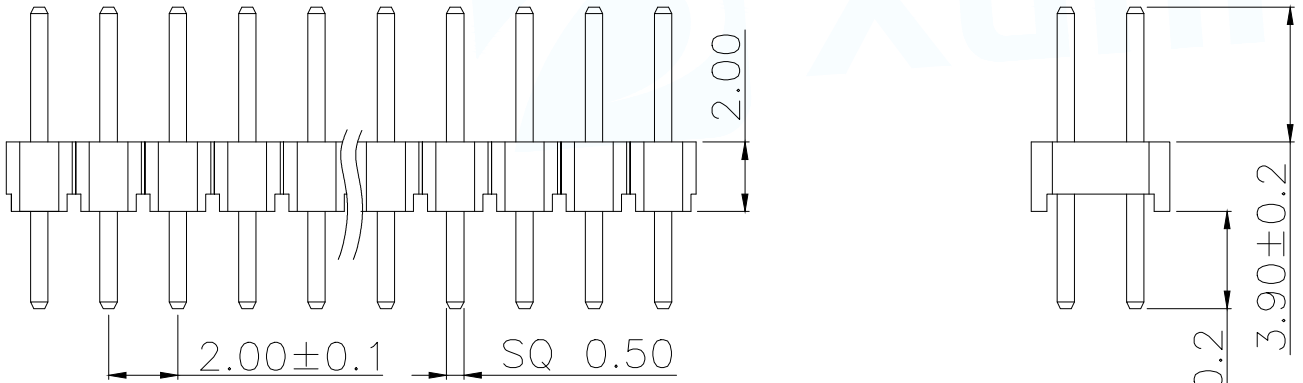

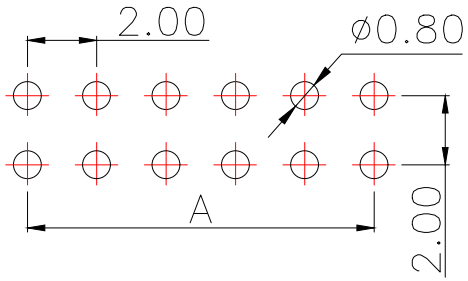

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

PART NUMBER DESCRIPTION:

PH2.0−01−NPZS

- (D＝单排;S＝双排)
- (Z＝直脚;W＝弯脚)
- (PIN数量;01.....40PIN)
- (排针开关)

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd		
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE:2.0PH H2.0 2xnPin 180度 PC2.8 PA3.9 PB2.0 L8.7 6T	
		PAR	PH2.0−01−NPZS
DECIMALS:	ANGLES:	DWN	
X.±0.30	X°±5°	CHKD	
X.X±0.25	X.X°±1°	APVD	
X.XX±0.20	X.XX°±0.5°	SCALE N:A	UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1 REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-0.5AL-6PB RJ45-005-014-11 FPC-1.0AX-14PWCR-H25 WAFER-PH2.0-2PJK FPC-0.5FX-20PWBH15 FPC-1.0HF-4PWAR-H20 HDMI-212L WAFER-WBM4.2-16PJK-GB WAFER-XH2.54-4PWZ-H62 FPC-0.5AX-24PWCR-H20 TYPEC-304YDSW-ACP16 WAFER-PH2.0-6PWB FPC-0.5AS-5PWCR-H20 FPC-0.5FX-4PWBH15 MU-103-ARW64 PHB2.0-02-20PZZ WAFER-PH2.0-11PZZ WAFER-PH2.0-3PWB WAFER-PH2.0-8PLB WAFER-VH3.96-4PLB FPC-0.5FX-14PWCR-H20 FPC-0.5HF-10PWBR-H20 WAFER-GH1.25-6PLB WAFER-MX1.25B-8PWB DC-031A-A100 FPC-0.5FX-16PWCR-H20 FPC-0.5FX-4PWCR-H20 FPC-0.5AX-30PWCR-H20 FPC-1.0AX-4PWCR-H25 SMA-KWE-323C-H13X23-LW