SIEMENS

Data sheet 5SL6225-7



Miniature circuit breaker 400 V 6kA, 2-pole, C, 25A

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	2
design of pole	2P
tripping characteristic class	C
mechanical service life (operating cycles)	
● typical	10 000
overvoltage category	III
degree of pollution	2
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
● with multi-phase operation at AC rated value	440 V
operational current	
● at 30 °C rated value	25 A
● at 40 °C rated value	23.48 A
● at 55 °C rated value	21 A
● at AC rated value	25 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
operating voltage	
● with multi-phase operation at AC maximum	440 V
● at DC rated value maximum	72 V
Protection class	
protection class IP	IP20, with connected conductors
Breaking Capacity	
switching capacity current	
● according to EN 60898 rated value	6 kA
● according to IEC 60947-2 rated value	6 kA
energy limitation class	3
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	2.6 W
suitability for operation	Residential buildings/infrastructure
Product details	
product feature	
● halogen-free	Yes

Subject to change without notice
© Copyright Siemens

● sealable	Yes
● silicon-free	Yes
product extension installable supplementary devices	Yes
Connections	
connectable conductor cross-section solid	
● minimum	0.75 mm²
● maximum	25 mm²
connectable conductor cross-section stranded	
● minimum	0.75 mm²
● maximum	25 mm²
connectable conductor cross-section finely stranded with core end processing	
● minimum	0.75 mm²
● maximum	25 mm²
tightening torque with screw-type terminals	
● minimum	2.5 N·m
● maximum	3 N·m
Mechanical Design	
height	90 mm
width	36 mm
depth	76 mm
installation depth	70 mm
number of modular width units	2
mounting position	any
net weight	261 g
Environmental conditions	
ambient temperature during operation	
● minimum	-25 °C
● maximum	45 °C
ambient temperature during storage	
● minimum	-40 °C
● maximum	75 °C

Approvals Certificates

General Product Approval

CEBEC CEBEC | UKCA | CE EG-Konf. | Confirmation | DVE VDE | Miscellaneous

General Product Approval	other		Environment	
EAC	Miscellaneous	Confirmation	Environmental Confirmations	Environmental Confirmations

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL6225-7
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5SL6225-7
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL6225-7
CAx-Online-Generator
http://www.siemens.com/cax
Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

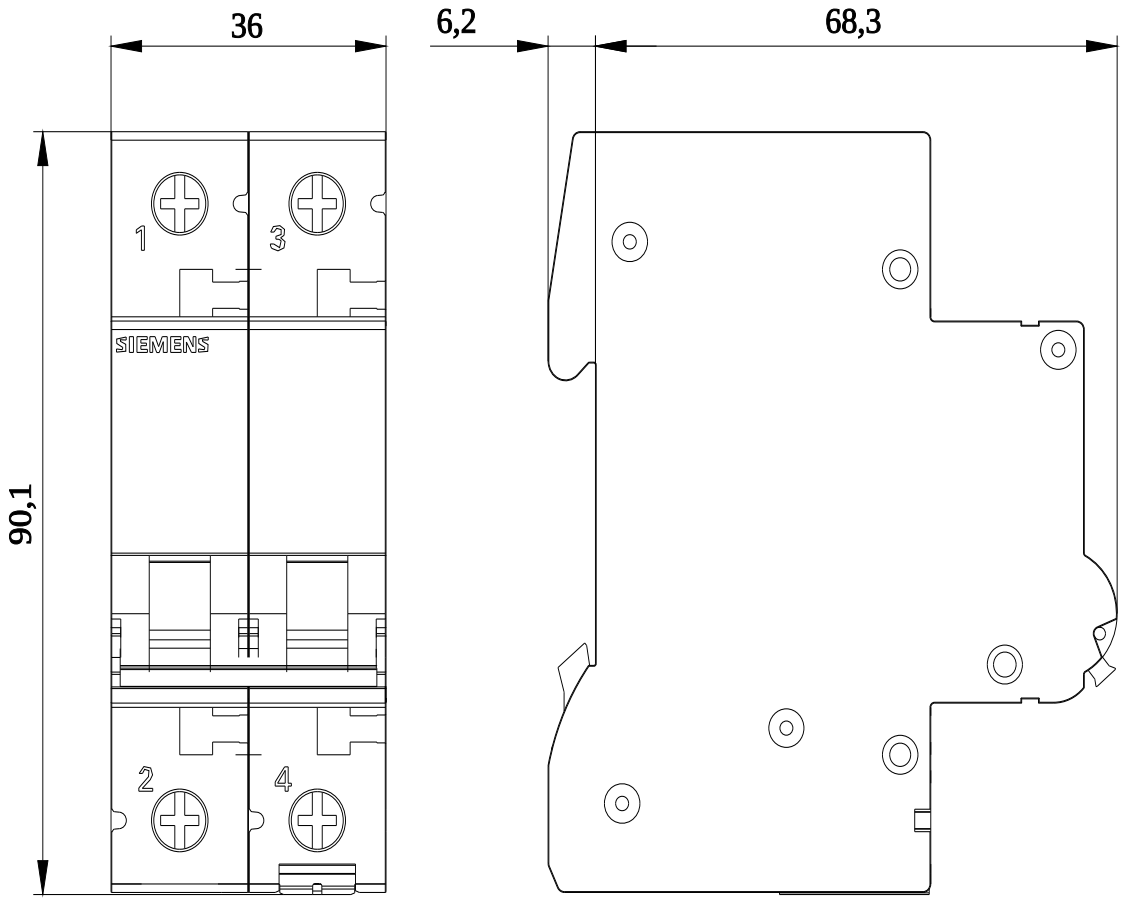

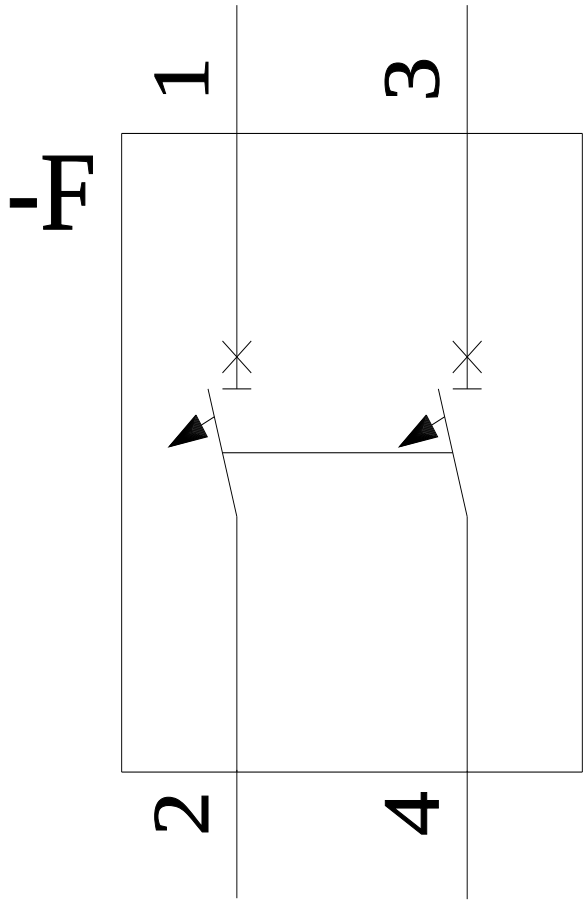

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

SIEMENS:

3SE50000AE131AJ0 3SU11020AB301BA0 3RK1908-0AP00-0BH0 3SU11020AB303BA0
6EP34378SB000AY0 3RT20181AP043MA0 3RT2027-2FB44-3MA0 3RW50746AB05 3RV29275AA00
3SE50000AF031AJ0 3SE50000AT10 3SE50000AD04 3SE50000AE11 3SE50000AF01 3SE50000AU22
6XV1843-5EH10-0CA0 3RV19351B 3SE50000AA05 3TH4364-0BB4 6ES7511-1AK02-0AB0
3RM13072AA04 3RM19106AA 3RV20211DA15 3RV29011E 3SE50000AA53 3VA91330JK10
3VA92430JJ22 6AV21240QC020AX1 6ES79548LC030AA0 3SE50000AA21