RAFIX 22 FS+ - USB feedthrough, round collar, frontring metallized

1.30.279.021/0700



General information	
Form of lens	flat lens
Color of lens	opaque slate-grey
Color of front ring	metallized
Form of collar	round


Dimensions	
Dimensions of collar	ø 29.8 mm
Overall height	11.3 mm
Mounting depth	27,7 mm
Mounting hole	22.3 mm
Key grid	30 x 30 mm
Diameter of collar	29.8 mm


Mechanical design	
Mounting	ring nut
Front connection	USB Type A
Rear connection	USB Type B
Torque for nut ring	1.2 Nm

Other specifications	
Ambient temp. operating min.	-25 °C
Ambient temp. operating max.	+70 °C
Storage temperature min.	-40 °C
Storage temperature max.	+80 °C
Operating life	1500 operations cycle
Degree of protection from front side	IP65 (DIN EN 60529) with closed sealing cap
Relative humidity	5 bis 95% (non condensed)
Shock resistance to IEC 60068-2-27 (EN 61131-2)	50 g at 11 ms half sine amplitude
Vibration resistance according to IEC 600 68-2-6 (EN 61131-2)	5 g at 10...500 Hz
ROHS compliant	yes
REACH compliant	yes

Technical data are approximate and intended solely for general orientation in the selection of a product.
Subject to modifications and errors. Images and other graphics may only be similar.
For more information, refer to www.rafi.de chapter Imprint / Data Protection.

Panel cut-out to IEC 60947-5-1

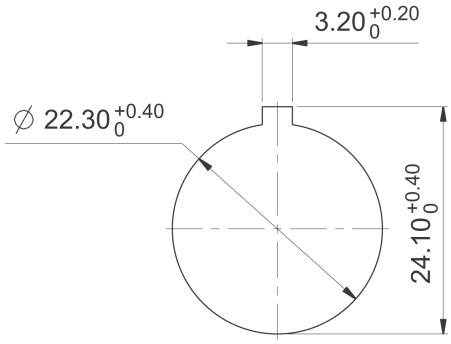

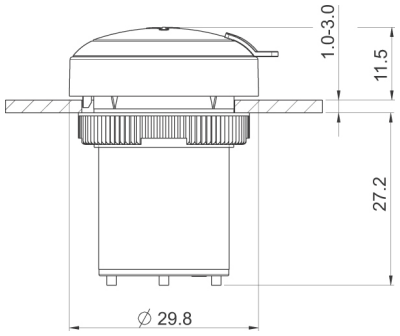

Technical data are approximate and intended solely for general orientation in the selection of a product.
Subject to modifications and errors. Images and other graphics may only be similar.
For more information, refer to www.rafi.de chapter Imprint / Data Protection.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RAFI:

1.15.106.503/1400	1.30.270.001/2307	1.30.270.231/2500	3.14.200.023/0000	5.00.100.139/0000
1.30.070.251/0200	5.92.025.368/0000	1.10.011.001/0221	1.10.011.001/0441	1.15.213.003/0000
1.65.124.301/1002	1.10.102.001/0104	1.11.011.001/0550	1.12.000.501/0000	1.74.508.001/2200
3.14.200.739/0000	5.46.167.042/0209	5.49.233.008/1002	1.30.074.121/0301	1.10.001.151/0104
1.10.011.001/0661	1.14.002.106/0000	1.15.108.451/0000	1.30.078.021/0100	3.14.002.062/0000
5.00.100.163/0000	1.30.074.501/0304	3.14.100.041/0000	1.15.108.552/0000	1.69.508.810/0000