
finder
SWITCH TO THE FUTURE



50
SERIES

PCB Relay with forcibly guided contacts 8 A

- Hoists and cranes
- Escalators
- Medical and dentistry
- Hospitals
- Carousel warehouses
- Elevators and lifts
- Disabled lift
- Wood-processing machines

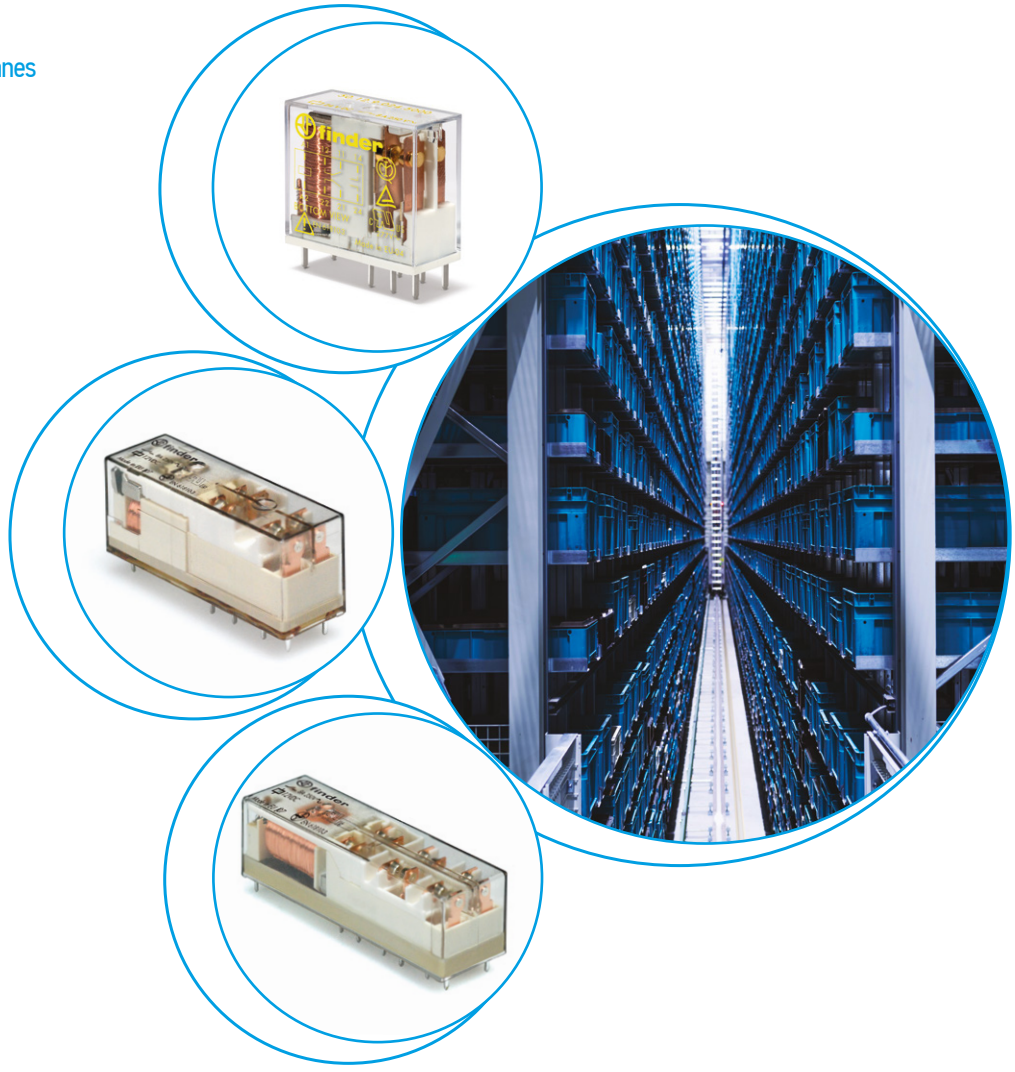

FINDER reserves the right to alter characteristics at any time without notice. FINDER assumes no liability for damage to persons or property, caused as a result of the incorrect use or application of its products.

PCB Relay with forcibly guided contacts according to EN 61810-3 (previously EN 50205) **Type B** **2 CO contacts*** **Type 50.12…1000** - 2 pole 8 A - Contact AgNi **Type 50.12…5000** - 2 pole 8 A - Contact AgNi + Au • High physical separation between adjacent contacts • Cadmium Free contact materials • 8 mm, 6 kV (1.2/50 µs) isolation, coil-contacts • Flux proof: RT II	**50.12…1000**  • For medium duty switching, suggested for DC loads • 2 pole 8 A • 5 mm pinning • PCB mounting	**50.12…5000**  • For safety applications • Gold plate contacts for low level switching capability • 5 mm pinning • PCB mounting
* According to EN 61810-3 only 1 NO and 1 NC (11-14 and 21-22 or 11-12 and 21-24) shall be used as forcibly guided contacts. *For UL ratings see:* *"General technical information" page* V For outline drawing see page 7	 Copper side view	 Copper side view

Contact specification			
Contact configuration		2 CO (DPDT)	2 CO (DPDT)
Rated current/Maximum peak current	A	8/15	8/15
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2000	2000
Rated load AC15 (230 V AC)	VA	500	500
Single phase motor rating (230 V AC)	kW	0.37	0.37
Breaking capacity DC1: 30/110/220 V	A	8/0.65/0.2	8/0.65/0.2
Minimum switching load	mW (V/mA)	500 (10/10)	50 (5/5)
Standard contact material		AgNi	AgNi + Au
Coil specification			
Nominal voltage (U_N)	V AC (50/60 Hz)	—	—
	V DC	5 - 6 - 12 - 24 - 48 - 60 - 110 - 125	5 - 6 - 12 - 24 - 48 - 60 - 110 - 125
Rated power AC/DC	VA (50 Hz)/W	—/0.7	—/0.7
Operating range	AC (50 Hz)	—	—
	DC	(0.75…1.2)U_N	(0.75…1.2)U_N
Holding voltage	AC/DC	—/0.4 U_N	—/0.4 U_N
Must drop-out voltage	AC/DC	—/0.1 U_N	—/0.1 U_N
Technical data			
Mechanical life AC/DC	cycles	—/10 · 10^6	—/10 · 10^6
Electrical life at rated load AC1	cycles	100 · 10^3	100 · 10^3
Operate/release time	ms	10/4	10/4
Insulation between coil and contacts (1.2/50 µs)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1500	1500
Ambient temperature range	°C	–40…+70	–40…+70
Environmental protection		RT II	RT II
Approvals (according to type)			

X-2019, www.findernet.com

50 SERIES
Forcibly guided contacts relay 8 A

PCB Relay with forcibly guided contacts according to EN 61810 (previously EN 50205)
Type A

Type 50.14...4220/4310
- 4 pole 8 A (2 NO + 2 NC) or (3 NO +1 NC)
- Contact $AgSnO_2$

Type 50.16...5420/5510/5330
- 6 pole 8 A (4 NO + 2 NC) or (5 NO +1 NC) or (3 NO+ 3 NC)
- Contact $AgSnO_2$ + Au


- High physical separation between adjacent contacts
- Cadmium Free contact materials
- DC coil 800 mW
- 8 mm, 6 kV (1.2/50 µs) isolation, coil-contacts
- PCB mounting
- Wash tight: RT III

C

NEW **50.14**




- For safety applications
- 4 pole 8 A
- PCB mounting



NEW **50.16**



- For safety applications
- 6 pole 8 A
- PCB mounting

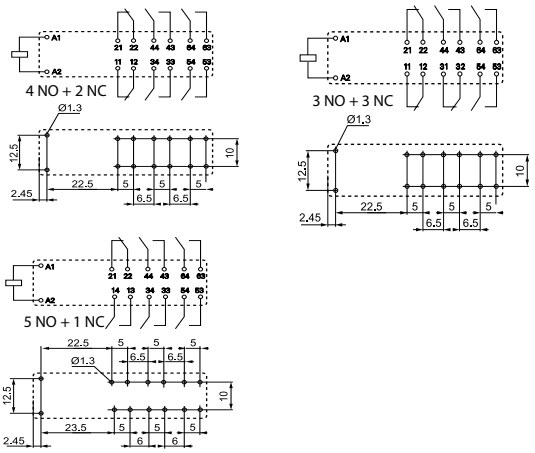

For UL ratings see:
"General technical information" page V

For outline drawing see page 7

Copper side view

Copper side view

Contact specification			
Contact configuration		2 NO +2 NC, 3 NO + 1 NC	4 NO +2 NC, 5 NO + 1 NC, 3 NO+ 3 NC
Rated current/Maximum peak current	A	8/15	8/15
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2000	2000
Rated load AC15 (230 V AC)	VA	700	1100
Single phase motor rating (230 V AC)	kW	0.37	0.37
Breaking capacity DC1: 30/110/220 V	A	8/0.6/0.2	8/0.6/0.2
Minimum switching load	mW (V/mA)	50 (5/10)	50 (5/10)
Standard contact material		$AgSnO_2$	$AgSnO_2$ + Au
Coil specification			
Nominal voltage (U_N)	V AC (50/60 Hz)	—	—
	V DC	12 - 24 - 48 - 110	12 - 24 - 48 - 110
Rated power AC/DC	VA (50 Hz)/W	—/0.8	—/0.8
Operating range	AC (50 Hz)	—	—
	DC	$(0.75...1.2)U_N$	$(0.75...1.2)U_N$
Holding voltage	AC/DC	—/0.4 U_N	—/0.4 U_N
Must drop-out voltage	AC/DC	—/0.1 U_N	—/0.1 U_N
Technical data			
Mechanical life AC/DC	cycles	—/$10 \cdot 10^6$	—/$10 \cdot 10^6$
Electrical life at rated load AC1	cycles	$100 \cdot 10^3$	$100 \cdot 10^3$
Operate/release time	ms	10/4	10/4
Insulation between coil and contacts (1.2/50 µs)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1500	1500
Ambient temperature range	°C	–40...+70	–40...+70
Environmental protection		RT III	RT III
Approvals (according to type)			

X-2019, www.findernet.com

Ordering information

Example: 50 series forcibly guided contacts, 2 CO (DPDT) 8 A contacts, 24 V DC coil.

5	0	.	1	2	.	9	.	0	2	4	.	5	0	0	0		
												A	B	C	D		

Series

Type
1 = PCB

No. of poles
2 = 2 pole 8 A
4 = 4 pole 8 A
6 = 6 pole 8 A

Coil version
9 = DC

Coil voltage
See coil specifications

A: Contact material
1 = AgNi (50.12)
4 = $AgSnO_2$ (50.14)
5 = AgNi + Au (50.12)
5 = $AgSnO_2$ + Au (50.16)

B: Contact circuit
0 = CO (nPDT)
2 = 2 NO (DPST-NO)
3 = 3 NO (3PST-NO)
4 = 4 NO (4PST-NO)
5 = 5 NO (5PST-NO)

D: Special versions
0 = Flux proof (RT II)
0 = Wash tight (RT III), 50.14, 50.16

C: Options
0 = CO (nPDT)
1 = 1 NC (SPST-NC)
2 = 2 NC (DPST-NC)
3 = 3 NC (3PST-NC)


C

Technical data


Insulation according to EN 61810-1				
Nominal voltage of supply system		V AC	230/400	
Rated insulation voltage		V AC	250	400
Pollution degree			3	2
Insulation between coil and contact set				
Type of insulation			Reinforced (8 mm)	
Overvoltage category			III	
Rated impulse voltage		kV (1.2/50 µs)	6	
Dielectric strength		V AC	4000	
Insulation between adjacent contacts				
Type of insulation			Basic	
Overvoltage category			III	
Rated impulse voltage		kV (1.2/50 µs)	4	
Dielectric strength (50.12, 50.16)		V AC	3000	
Dielectric strength (50.14)		V AC	2500	
Insulation between open contacts				
Type of disconnection			Micro-disconnection	
Dielectric strength		V AC/kV (1.2/50 µs)	1500/2.5	
Insulation between coil terminals				
Rated impulse voltage (surge) differential mode (according to EN 61000-4-5)		kV (1.2/50 µs)	2	
Other data				
Bounce time: NO/NC		ms	2/10	
Vibration resistance (10…200)Hz: NO/NC		g	20/6	
Shock resistance NO/NC		g	20/5	
Power lost to the environment	without contact current	W	0.7	
	with rated current	W	1.2	
Recommended distance between relays mounted on PCB		mm	≥ 5	

Contact specification


F 50 - Electrical life (AC) v contact current (type 50.12)

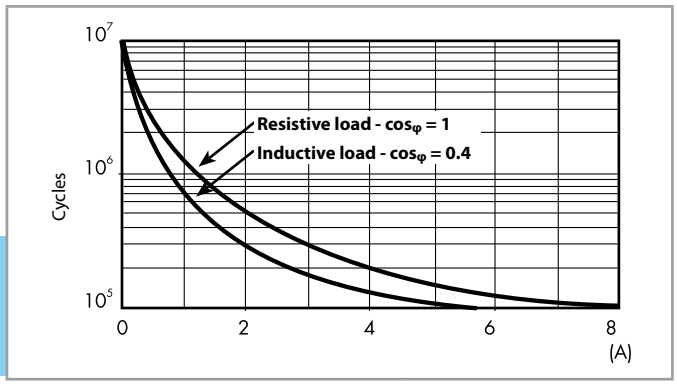

H 50 - Maximum DC1 breaking capacity (type 50.12)

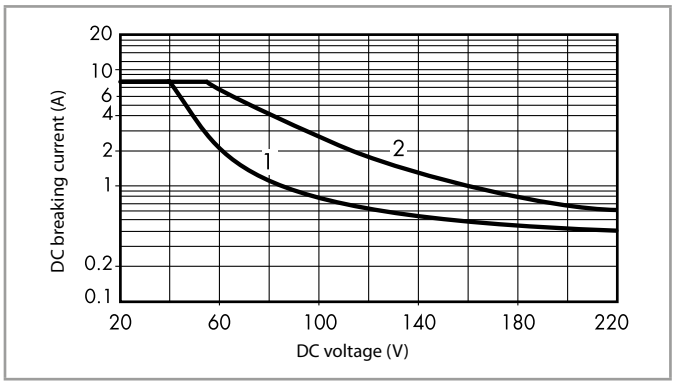

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of ≥ 100 · 10³ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
  Note: the release time for the load will be increased.

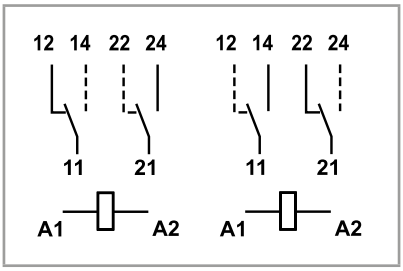


Alternative selection of NO and NC contacts to provide Forcibly guided (mechanically linked) contacts, in accordance with EN 61810-3 (type B).

Coil specifications

DC coil data (type 50.12)

Nominal voltage U_N	Coil code	Operating range U_{min}	Operating range U_{max}	Resistance R	Rated coil consumption I at U_N
V		V	V	Ω	mA
5	**9**.005	3.8	6	35	143
6	**9**.006	4.5	7.2	50	120
12	**9**.012	9	14.4	205	58.5
24	**9**.024	18	28.8	820	29.3
48	**9**.048	36	57.6	3280	14.4
60	**9**.060	45	72	5140	11.7
110	**9**.110	82.5	131	17250	6.4
125	**9**.125	93.7	150	22300	5.6

R 50 - DC coil operating range v ambient temperature
Standard coil (type 50.12)

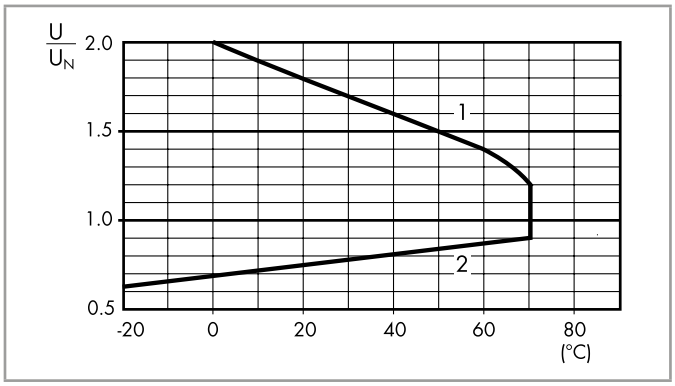

1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.


DC coil data (type 50.14/16)

Nominal voltage U_N	Coil code	Operating range U_{min}	Operating range U_{max}	Resistance R	Rated coil consumption I at U_N
V		V	V	Ω	mA
12	**9**.012	9	14.4	180	66.6
24	**9**.024	18	28.8	720	33.3
48	**9**.048	36	57.6	2880	16.6
110	**9**.110	82.5	131	15125	7.7


X-2019, www.findernet.com

Contact specification

F 50 - Electrical life (AC) v contact current (type 50.14)

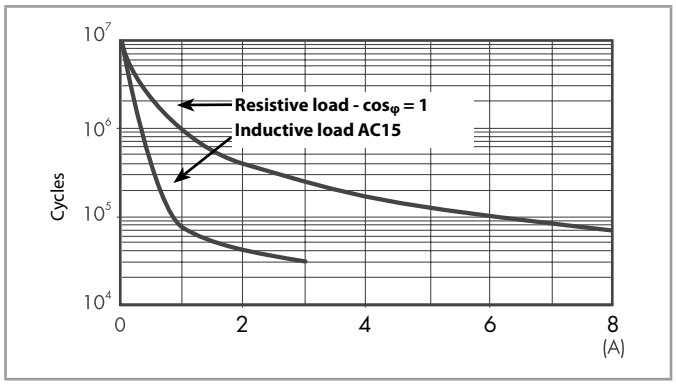


H 50 - Maximum DC1 breaking capacity (type 50.14)

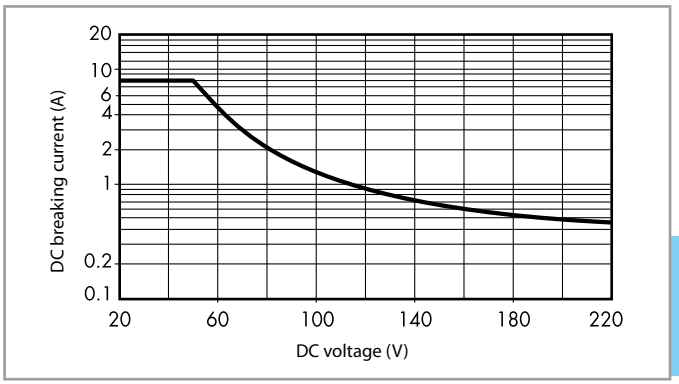


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of ≥ 100 · 10³ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
  Note: the release time for the load will be increased.

F 50 - Electrical life (AC) v contact current (type 50.16)

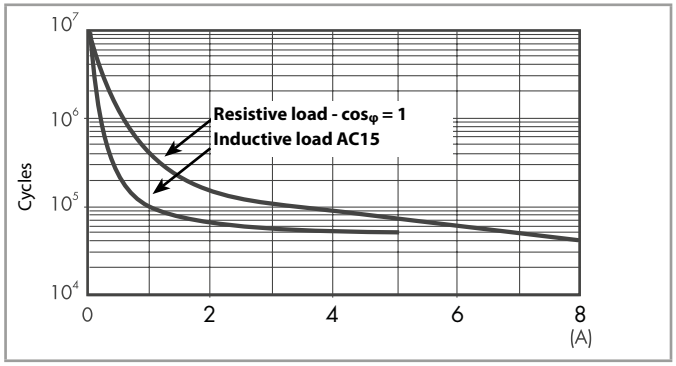


H 50 - Maximum DC1 breaking capacity (type 50.16)

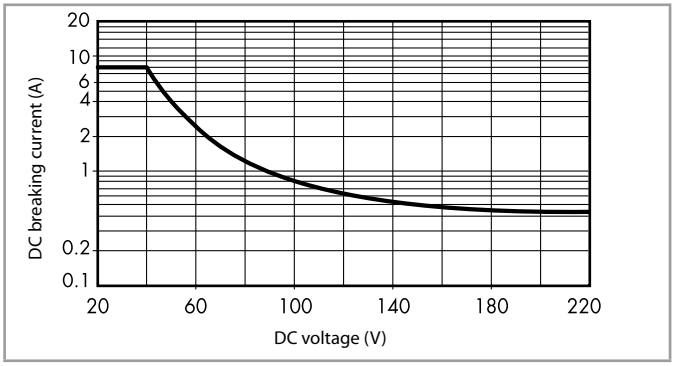


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of ≥ 100 · 10³ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
  Note: the release time for the load will be increased.

Outline drawings


Types 50.12…1000/50.12…5000



Type 50.14



Type 50.16

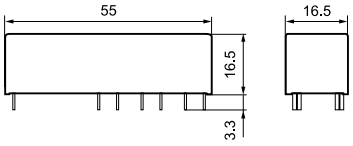

X-2019, www.findernet.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

finder:

093.08 22.23.8.024.4000 20.28.8.230.0000 563290600040 7F.20.8.120.1020 93.68.0.024 99.80.0.024.98 RB1492500000 78.50.1.230.1202 99.02.8.230.07 12.A2.8.230.0000 NFC 39.01.0.012.0060 553390120090 60.12.8.240.0040 623290484800 553492200040 56.32.9.024.0000T 40.52.9.110.0000 22.34.0.230.4320 260180240000 48.P6.7.024.1050SPA 80.21.0.240.0000 39.61.0.060.0060 563291100040 606390240000 41.31.8.230.0000 20.23.9.012.0000 32.21.7.012.4000 39.60.0.024.9024 406290240000