

Units:mm



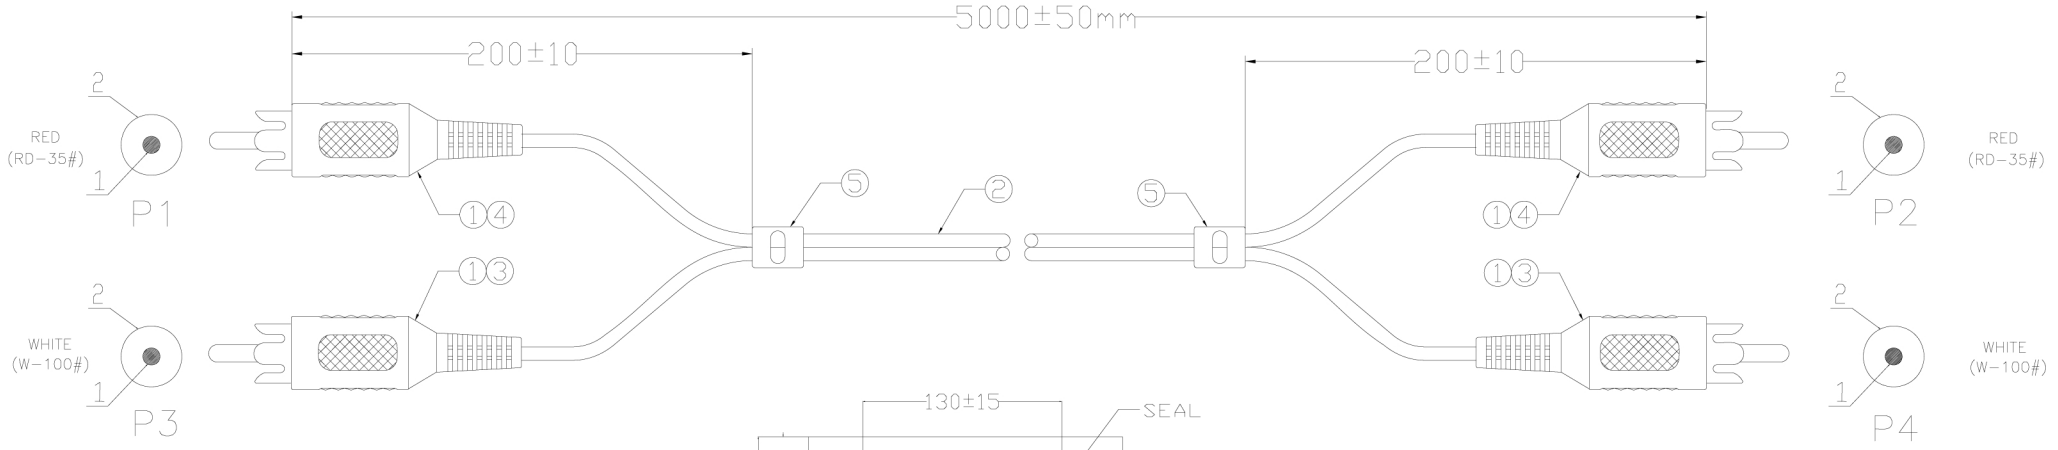

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance:5 Ohm(max)
3.Insulation resistance:10Mohm(min)
4.dielectric test:DC 300V

NOTE:
1.小PE袋/大PE袋对应料号.包袋数量及时间印刷样式:

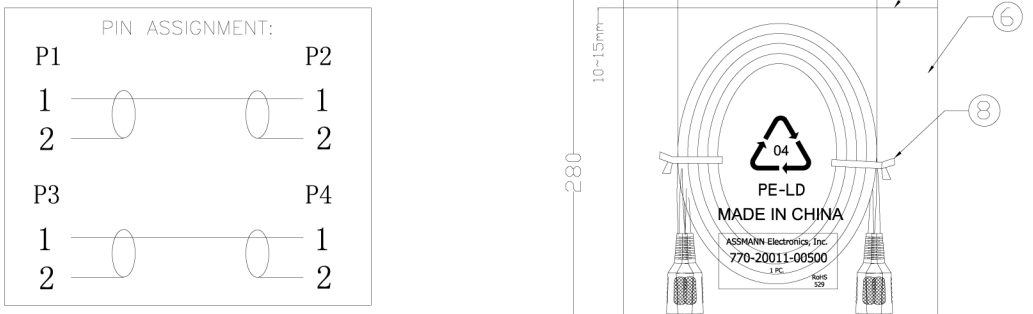

2.外箱两个侧唛ITEM NO后面各贴一个35*22mm ROHS标签。

NO.	NAME	Q'TY	SPECIFICATION
⑧	TIE	2	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"5PCS"
⑥	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
	OUT JACKET	6.6g	PVC-40P RED(RD-35),(Mould NO.WM-009)
③	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO.WM-009)
②	CABLE	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
①	CONN	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN

CnC Tech, LLC
Industrial Cable and Connector Technology

DRAWED BY	LICHENG	DARWING NO.	VG/LJQ-094-082-E
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20011-00500
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITEON	A/0	PROJECTION	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

102-1030-BE-00100 3239-16-1-0500-005-1-TS 512-26-8800-BL-0007F 743-60010-00200
911S-2-5-00700-PL 2000-1-2-41-00-BK 51025-10-0100-01 521-26-04-SV-014F 1569-22-1-0500-006-1-TS
3521-08-0101-99 3522-20-0100-99 520-26-4400-SV-0010F 10064-30-1-0500-007-1-TS
1332-22-1-0500-001-1-TS 1569-22-1-0500-007-1-TS 3135-18-1-0500-003-1-TS 3135-18-1-0500-005-1-TS
302-28-26-GR-0100F 3221-26-0300-00 1007-18-1-2000-007-1-TD 3122-18-1-0500-002-1-TS
3239-20-1-0500-002-1-TS 1002-003-02000 3132-22-1-0500-001-1-TS 521-26-04-SV-005F
523-26-6600-SV-0010F CNC-SAE-16-183-002 3132-24-1-0500-002-1-TS 1007-20-1-2000-007-1-TS
1569-18-1-0500-008-1-TS