


Specifications


Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material:Brass
Insulation Material: Polyester UL94V−0
PBT
Contact plating: Gold Flash

All materials must be GP materials

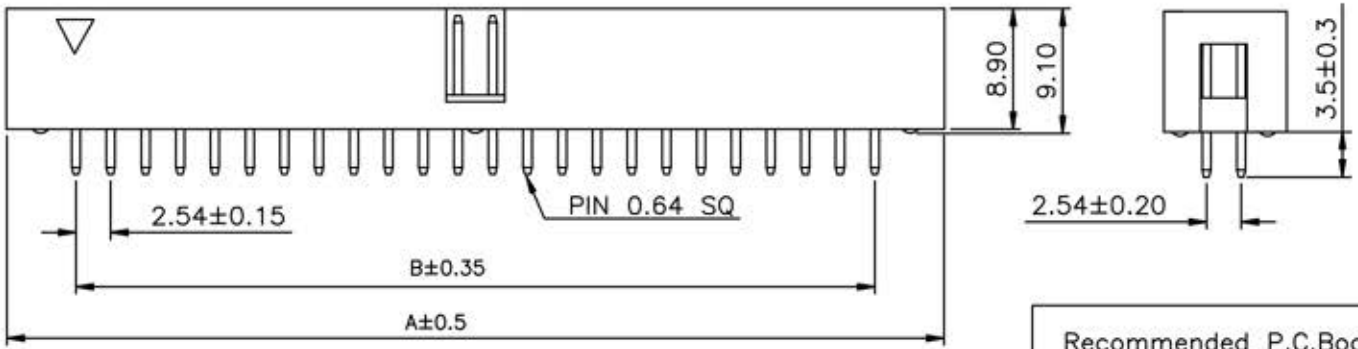

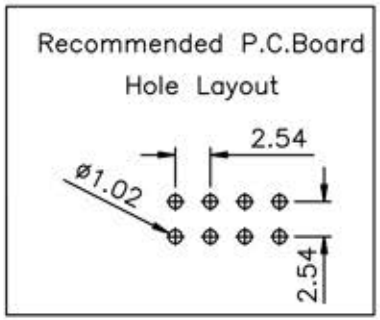

NUMBER OF PASITION	Dimensions A	B
10	20.32	12.70
14	25.40	17.78
16	27.94	20.32
20	33.02	25.40
26	40.64	33.02
30	45.72	38.10
34	50.80	43.18
40	58.42	50.80
50	71.12	63.50
60	83.82	76.20
64	88.90	81.28

CnC Tech, LLC
Industrial Cable and Connector Technology

DESIGN *tumayt*		PART NO.	3020-XX-0200-00	
DATE 2011.12.05		REV A	SIZE A4	UNLESS OTHERWISE SPECIFIED TOLERANCE ANG ±5° 0 ±0.3 .0 ±0.15 .00 ±0.10
CHECKED		UNIT mm		

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

1002-003-02000 1007-18-1-2000-007-1-TD 102-1030-BE-00100 520-26-4400-SV-0010F 911S-2-5-00700-PL
10064-30-1-0500-007-1-TS 1569-22-1-0500-007-1-TS 2000-1-2-41-00-BK 3132-24-1-0500-002-1-TS
3522-20-0100-99 1007-20-1-2000-007-1-TS 1569-22-1-0500-006-1-TS 302-28-26-GR-0100F
3122-18-1-0500-002-1-TS 3135-18-1-0500-005-1-TS 3221-26-0300-00 3521-08-0101-99
512-26-8800-BL-0007F 3135-18-1-0500-003-1-TS 521-26-04-SV-005F CNC-SAE-16-183-002
521-26-04-SV-014F 743-60010-00200 1569-18-1-0500-008-1-TS 3132-22-1-0500-001-1-TS
51025-10-0100-01 1332-22-1-0500-001-1-TS 3239-20-1-0500-002-1-TS 523-26-6600-SV-0010F
3239-16-1-0500-005-1-TS