




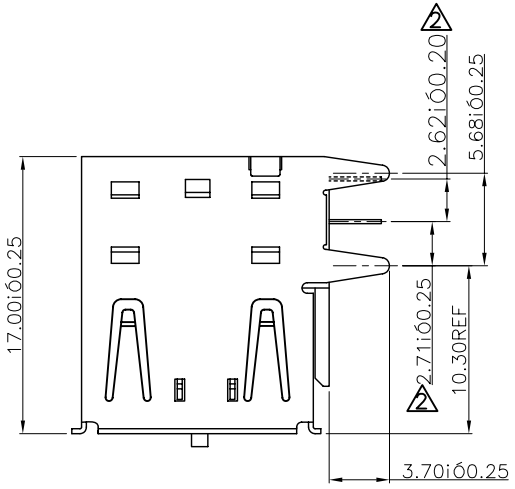

NOTES:
MATERIAL:
CONTACTS:BRASS T=0.25mm
INSULATOR:PBT+30%G.F. UL 94V-0
FRONT SHELL:BRASS T=0.30mm
BACK SHELL:SPCC T=0.30mm
SPRING:SPCC
MECHANICAL:
MATING:35N MA
WITHDRAWAL FORCE:10N MIN
DURABILITY:1500CYCLES MIN
ELECTRICAL:
CURRENT RATING1.5A
VOLTAGE RATING:30V
WITHSTANDING VOLTAGE:750V AC
CONTACT RESISTANCE:25mΩ MAX
INSULATION RESISTANCE:1000MΩ MIN
PLATING
CONTACTS:GOLD FLASH AND TIN OVER NICKEL PLATED
SHELL:NICKEL OVER ALL PLATING
ENVIRONMENTAL:
TEMPERATURE RANGE:-55øXC TO+85øXC

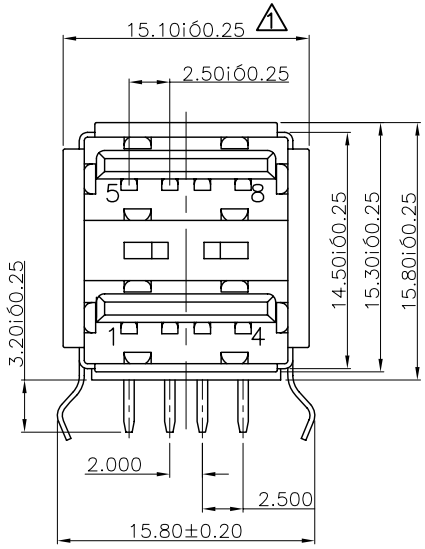

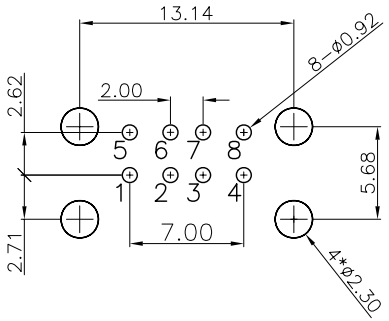

P.C.B LAYOUT

10/01/30	ING	EG-N1012072			A3
09/12/29	BENDEE	EG-H12067	變更尺寸標注位置	2	A2
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差參考表			CnC Tech,LLC					
				TITLE:	USB 8P A/F 雙層DIP 90°雙彈片5U"成品			
X.X ±0.38	X.X° ±2.0°	APPD:		PRODUCT NO:	1001-004-01010			
X.XX ±0.25	X.XX° ±1.0°	CHECK:		DATE	SCALE	UNIT	TYPE	PAGE
X.XXX ±0.13	X.XXX° ±0.5°	DRAW:		2010.01.30	1:1	mm	CD	1 / 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

3221-26-0300-00 3239-20-1-0500-002-1-TS 51025-10-0100-01 521-26-04-SV-005F
1569-18-1-0500-008-1-TS 3135-18-1-0500-005-1-TS 512-26-8800-BL-0007F 302-28-26-GR-0100F
3239-16-1-0500-005-1-TS 743-60010-00200 911S-2-5-00700-PL 1007-18-1-2000-007-1-TD
2000-1-2-41-00-BK 3132-24-1-0500-002-1-TS 3522-20-0100-99 10064-30-1-0500-007-1-TS
1569-22-1-0500-006-1-TS 523-26-6600-SV-0010F CNC-SAE-16-183-002 1569-22-1-0500-007-1-TS
520-26-4400-SV-0010F 521-26-04-SV-014F 1002-003-02000 1007-20-1-2000-007-1-TS
3132-22-1-0500-001-1-TS 3135-18-1-0500-003-1-TS 3521-08-0101-99 102-1030-BE-00100
1332-22-1-0500-001-1-TS 3122-18-1-0500-002-1-TS