

UNIT:mm

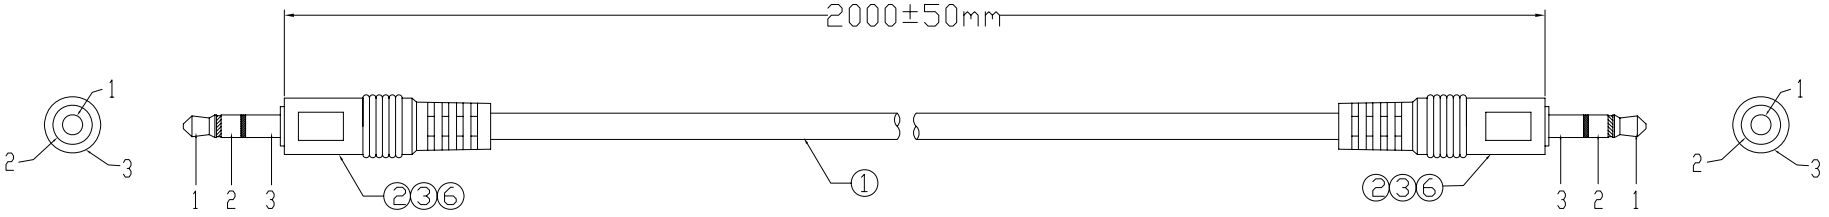

P1

CONN OUTER MOLD: WM-020




CONN OUTER MOLD: WM-020

P2

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHTIE	2
3	SPIRAL	3

Electronic Test:
1.100% Test,(Open,Short,Miss Wire)
2.Contact Resistance:2 ohm max.
3.Insulation Resistance:1M ohm min.
4.Hi-Pot:100V DC/10ms

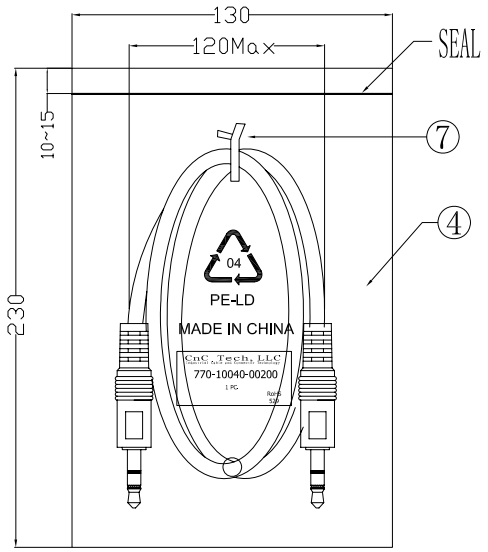

1PCS/PE BAG

NO.	NAME	Q'TY	SPECIFICATION
⑦	TIE	1	BLACK L=80mm
⑥	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*L15mm.
⑤	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
④	PE BAG	1	CLEAR SIZE:100*200*0.05mm PRINT BLACK"MADE IN CHINA".
③	OUT JACKET	5.5g	OUTER MODEL PVC 45P COLOR BLACK
②	CONN	2	3.5ST MALE Tray6.0mm L=30mm MOLD TYPE NI-PLATED INSULATOR COLOR:BLACK
①	CABLE	1	NOUL 28AWG(7/0.12 TC)*2C(RED,WHITE)+S(43/0.12 TC) JACKET BLACK OD:3.0MM L=2020±20mm.

CnC Tech, LLC
Industrial Cable and Connector Technology

DRAWED BY	ZHONGHS	DARWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	770-10040-00200
DECIDE BY		DATE	2012-02-15
VERSIONS/EDITEON	A/0	PROJECTION	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

3221-26-0300-00 3239-16-1-0500-005-1-TS 521-26-04-SV-005F 102-1030-BE-00100
1332-22-1-0500-001-1-TS 2000-1-2-41-00-BK 3135-18-1-0500-003-1-TS 512-26-8800-BL-0007F
523-26-6600-SV-0010F 10064-30-1-0500-007-1-TS 3135-18-1-0500-005-1-TS 3239-20-1-0500-002-1-TS
51025-10-0100-01 520-26-4400-SV-0010F 1569-18-1-0500-008-1-TS 3122-18-1-0500-002-1-TS
3522-20-0100-99 1002-003-02000 1569-22-1-0500-007-1-TS 3132-24-1-0500-002-1-TS
1007-20-1-2000-007-1-TS 3132-22-1-0500-001-1-TS 743-60010-00200 911S-2-5-00700-PL
CNC-SAE-16-183-002 1569-22-1-0500-006-1-TS 3521-08-0101-99 521-26-04-SV-014F
1007-18-1-2000-007-1-TD 302-28-26-GR-0100F