
RoHS COMPLIANT

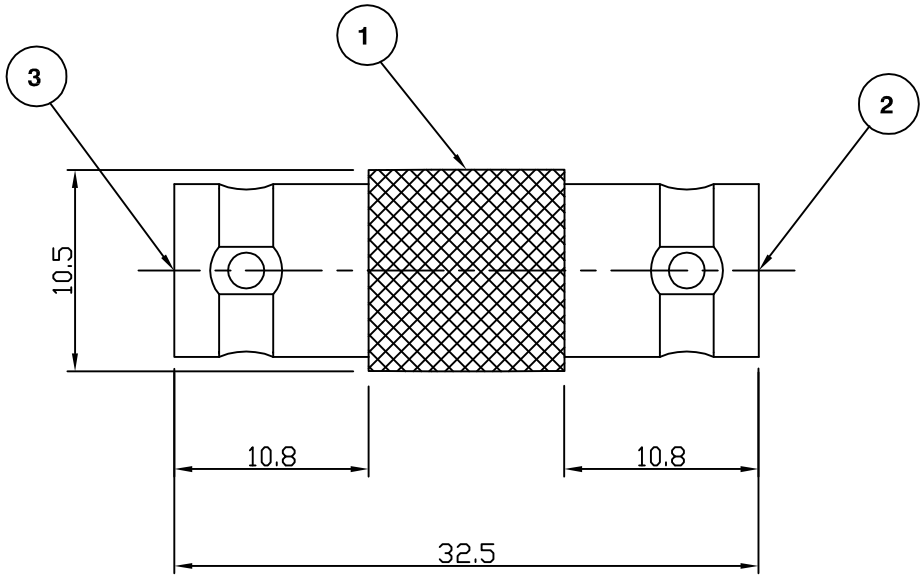

Electrical Characteristics

Nominal Impedance:	50 ohms
Frequency Range:	DC to 4 GHz
Operating Voltage (rms):	500 V maximum at sea level
Dielectric Withstand Voltage (rms):	1500 V maximum at sea level
Contact Resistance:	1.5 milliohms maximum
Insulation Resistance:	5000 megohms minimum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Brass, nickel plated
2	Dielectric	POM
3	Contact	Brass, gold plated

Drawing Update	JT	3	01 Apr 10
CAD Issue	SN	2	30 Sep 02
First Issue	AT	1	09 Feb 95
DESCRIPTION OF REVISION	APPVD	ISS	DATE

cinch CONNECTIVITY SOLUTIONS a bel group

Cinch Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford,Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale	DRAWN BY:	S Nash	TITLE: BNC Jack to BNC Jack
DIMENSIONS: mm	CHECKED BY:	R Drenan	
TOLERANCES: ± 0.2mm unless otherwise stated	APPROVED BY:	P D Couzens	
	DATE:	30 Sep 02	

PART NUMBER: **VBA90-1**

PAGE: 1 of 1

COPYRIGHT © 2002 VITELEC ELECTRONICS LIMITED THIS DRAWING MAY NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT OUR WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

108-0913-001 135-3402-001 21-14-M5.0 30-9506-88 415-0028-048 415-0043-MM250
CN1021A14G03P8-040 M49142/03-0005 30-9516 40-98443N-C 131-3701-306 142-0403-011
415-0030-MM150 8-141 DD2466134 DEUH-9P M24308/4-5F 147-0701-832 415-0203-024 415-0536-012
CN0967C10A20P6-040 145-0693-002 145-0701-821 147-0701-241 CJ70-7 111-0102-001 12-141
40-9715HM ATT-0263-04-SMA-02 C0909A18-11PN-106