



| 标 记 MARK | ECN编号/变更内容 ECN NO/DEFINITION | 修 改 REVISE | 日 期 DATE | 核 准 APPROVE |
|---|---|---|---|---|
| | | | | |
| | | | | |

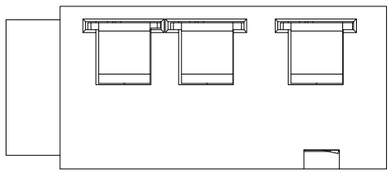


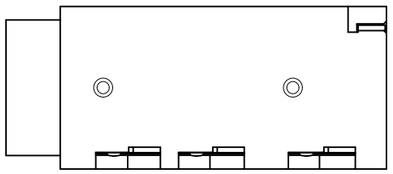


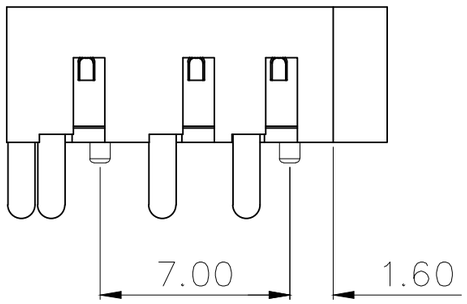

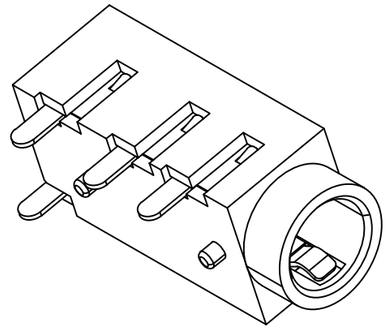



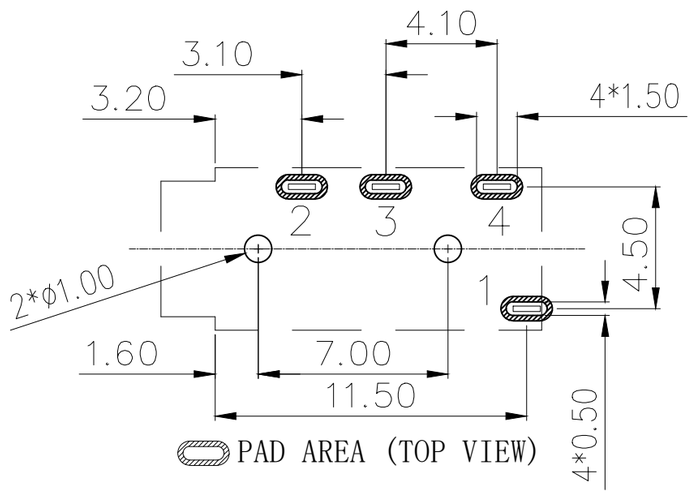
3D VIEW

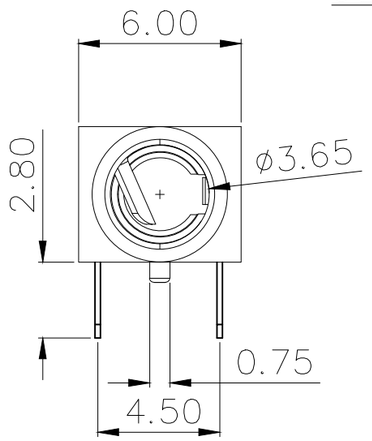


电气性能

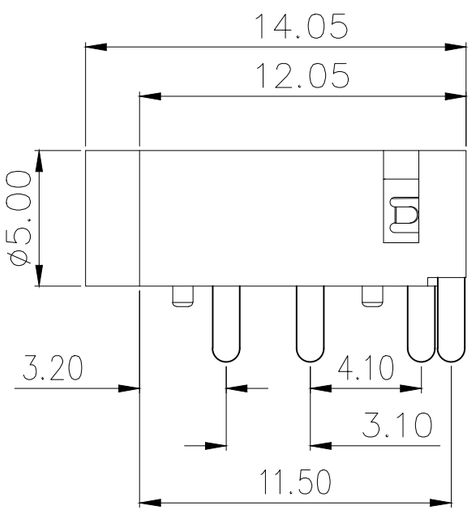


PAD AREA (TOP VIEW)

RECOMMEND PCB LAYOUT(±0.05)

NOTES

1. MATERIAL:
   1.1. HOUSING: PPA COLOR IS BLACK;
   1.2. CONTACT: PHOSPHOR COPPER (C5191,T=0.2mm);
2. FINISH:
   2.1. TERMINAL:
   CONTACT AREA: NI PLATED OVER ALL;
   SOLDER AREA: SN PLATED OVER ALL;
3. ELECTRICAL:
   3.1. VOLTAGE RATING: 30 VAC RMS;
   3.2. CURRENT RATING: 0.5 AMP;
   3.3. CONTACT RESISTANCE: 30MILLIOHMS MAX.;
   3.4. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz,1MIN.;
   3.5. INSULATION RESISTANCE: 100MEGOHMS MIN @500V DC;
4. MECHANICAL:
   4.1. MATING FORCE: 5~25N;
   4.2. UNMATING FORCE: 5~25N;
   4.3. OPERATING LIFE: 5000 CYCLES;
5. ENVIRONMENTAL:
   5.1. STORAGE TEMPERATURE RANGE: −40℃~+85℃
   5.2. OPERATION TEMPERATURE RANGE: −25℃~+70℃;
6. SALT SPRAY TEST: 8H(EXCLUDING RIVETED BENDS)

| 序 号 | 品 名 | 材 质 | 电镀/颜色 | 备 注 |
|---|---|---|---|---|
| 2 | 接触 | 铜 | 镀镍 | |
| 1 | 基座 | PPA | 黑色 | |

| | | | |
|---|---|---|---|
| 深圳市虹成电子有限公司 | 品 名 TITLE | 耳机座 | |
| | 料 号 PART NO | HC-PJ-320A | |
| UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30 ANGULAR: X.xx° ±1° X.x° ±3° X.° ±5° | 比 列 SCALE | 1:1 | |
| | 单 位 UNIT | MM | 制 图 DRAW: AhYe |
| | 张 数 PART NO | 1 OF 1 | 审 核 CHECKED: 夏操云 |
| | 版 本 REV | A | 批 准 APPROVE: 赵亮亮 |

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## HC:

HCZZ0451-4 HC-USB3.0-L257-J HC-USB3.0-L175-2X1-J HCZZ0530-4 HC-FPC-0.5-24P-FH20
HC-FPC-0.5-40P-FH20 HCZZ0576-5 HCZZ0451-3 HC-USB3.0-C34-P HC-PM254-8.5H-2x20PS
HC-FPC-0.5-6P-CSH20 HC-PZ254-11.5L-2x18PZ HC-PM254-8.5H-1x21PZ HC-PHB2.0-2x5A HCZZ0001-4
HC-PM200-4.3H-2x8PS HC-PHB2.0-2x4AW HC-PZ127-7.2L-2x3PS HCZZ0001-2 HCZZ0451-6
HC-PZ254-13.8L-1x6PWA HC-PM254-5.0H-2x10PZ HC-PM200-4.3H-2x20PZ HCZZ0032-6
HC-FPC-0.5-10P-FH20 HCZZ0001-6 HC-USB3.0-C26 HCZZ0514-6 HC-FPC-0.5-50P-FHH20
HC-PZ254-11.5L-1x10PZ