
ROHS

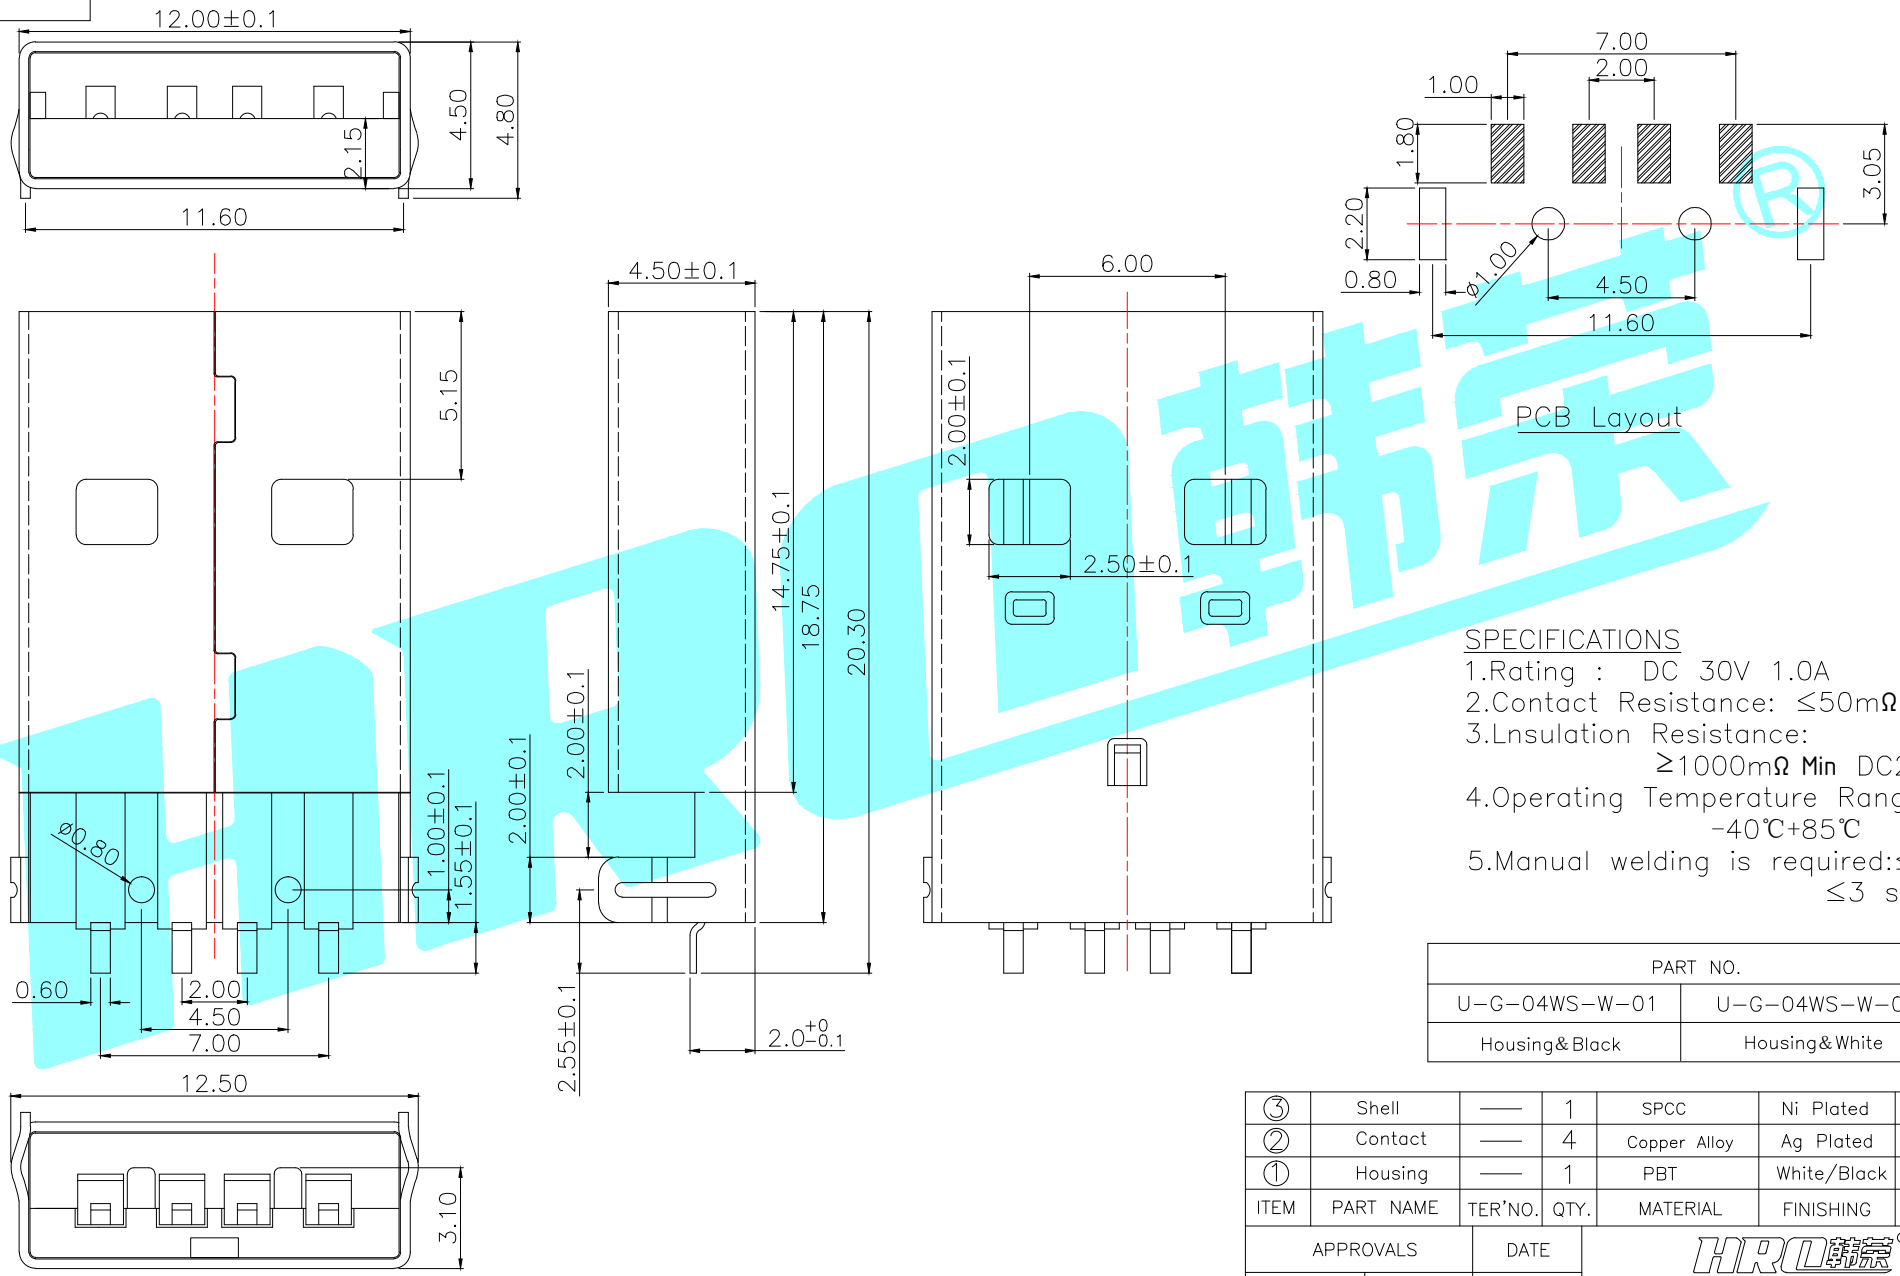

SPECIFICATIONS

1.Rating : DC 30V 1.0A
2.Contact Resistance: ≤50mΩ
3.Lnsulation Resistance:
≥1000mΩ Min DC250V
4.Operating Temperature Range:
-40℃+85℃
5.Manual welding is required:≤350°C
≤3 seconds

PART NO.	
U-G-04WS-W-01	U-G-04WS-W-02
Housing&Black	Housing&White

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	——	1	SPCC	Ni Plated	——
②	Contact	——	4	Copper Alloy	Ag Plated	——
①	Housing	——	1	PBT	White/Black	——

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD
DRAWN	JKUN.LU	2014/9/29	
CHECKED			TITLE: USB CONNECTOR
APPROVALS			PART NO. U-G-04WS-W-□□
TOLERANCES ARE	30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~5 ±0.15	ANGLE ±2°	UNIT: mm / SCALE: 1:1 / PROJ: / DRAWING NO. —— / SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K2-1102SP-A5SC-04 DS-01BP K2-1102SP-K4SC-04 SIM-08A U-F-M5DD-W-L K2-1102BG-I4CW-01 K2-1102DP-G4SW-04 K8-5851D-L1 U-F-M5DD-Y-L1 U-F-M5DS-Y-1 U-M-M5DD-W-2 PJ-3250-5A TYPE-C-31-M-04 U-C-M5DW-W-1 DQ-03BP ES-07KP K2-1102AT-A4CW-01 SS-22D03-G4 K2-1818DP-A3SW-01 K3-1346S-F1 PJ-399B-6A DA-10RP K3-2258S-E1 K5-1617SA-01 U-C-M5SS-Y-1 U-F-M5DD-Y-L K2-1102DP-S3SW-04 U-F-M5SS-W-5 DC-031A-10A K2-1101DF-A4DW-01