




MAPX	MODIFICATION	DATE

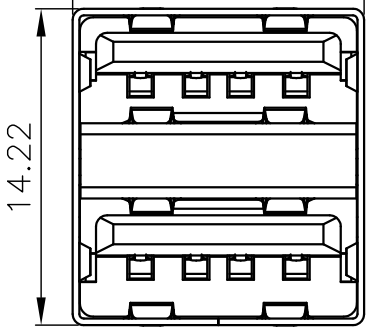


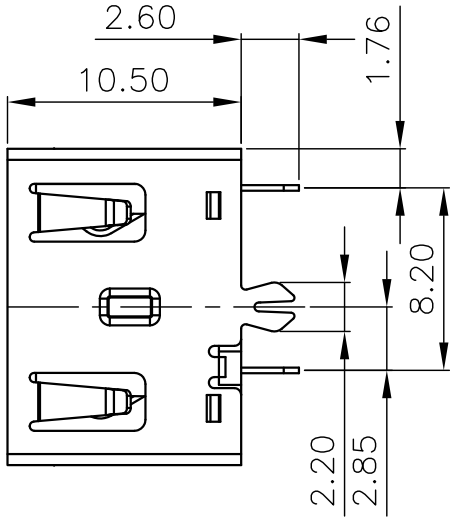



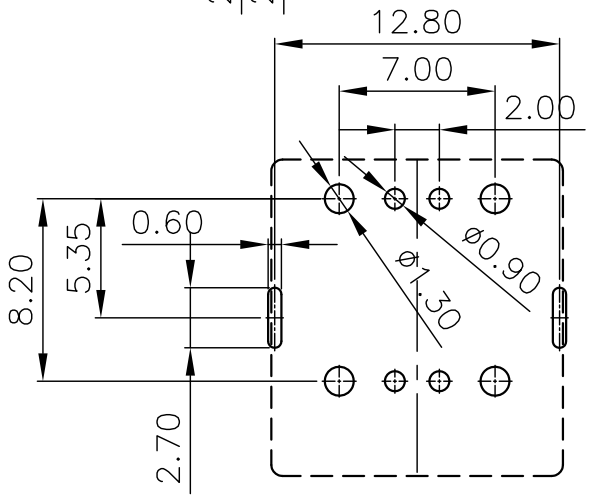

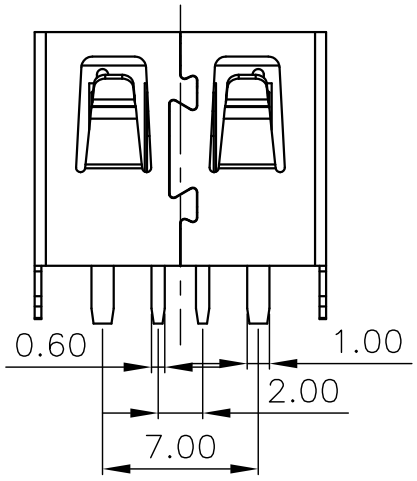



P. C. B LAYOUT

Note:
1.Material:
1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0
1.2,Contact: copper alloy,t=0.25mm
1.3,Shell: copper/Ferroalloy alloy,t=0.30mm
2.Specification:
2.1,Current rating:1.5A Max.
2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3,Contact resistance: 30 mΩ Max.
2.4,Insulation resistance: 100 MΩ Min.
2.5,Total mating force: 3.57 Kgf Max.
2.6,Total unmating force: 1.0 Kgf Min.
3.Finish:
3.1,Contact: Piated Golg in Mating Area: Tin On Solder Talls
Shell: Nickel Plating
4.Environmental:
4.1,Temperature range: -55°C~85°C

PART ON:
907-222AXXX1Y1XX

- 电镀规格；02,镀金1u″ 04,镀金3u″ 07,镀金15u″ 08,镀金30u″
- 端子材质；1,青铜 2,磷铜
- 端子规格；D,90度 Y,180度 S,SMT贴板
- 塑胶型态；1,双层短体 2,双层半包
- 塑胶颜色；01,白色 02,黑色 03,本色
- 塑胶材质；1,PBT 2,LCP 3,PA9T 4,PPA 5,PA6T
- 对插方向；A,正向 B,反向
- 外壳材质；1,铁壳 2,铜壳
- 插口类型；1,有边平弹 2,无边平弹
- 外壳脚型；1,弯脚 2,直脚 3,无脚 4,鱼叉脚
- 类别;双层系列

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE		
X.	±0.30	X. ±5.°
.X	±0.25	.X ±2.°
.XX	±0.15	.XX ±1.°
.XXX	±0.10	.XXX ±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	907-422A1021Y10210		
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	AF大电流180度10.5双层鱼叉脚无边平弹铜壳PBT黑胶		
日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW		版本 VER	A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

906-262A1021D10200 907-312A1101Y10210 918-468K2029Y50000 907-111A1022D10200
908-351A1011D10100 917-P81A202ES60201 918-415K3028S40000 920-C52A2021S10105
906-752B1114D10200 911-221A2021S10100 912-112A1011D10100 917-B88C201AH70201
920-A62A2021S10104 920-C62A2021S10103 904-232A2031S10100 910-151A2021D10100
918-418K2022Y40011 919-162A1012D10400 912-112A2021S10100 904-232B2032S10100
906-552A1012D10200 916-151A1022Y10200 920-A62A2021S10108 920-A64A2091S101A3
904-331B2032S10200 905-761A2032S10200 912-312A1012D10100 918-318K2023C40005
920-154A2021Y10110 920-F52A2021S10105