


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/20/05	–	INITIAL RELEASE
A	01/20/09	100073	UPDATE DRAWING FORMAT

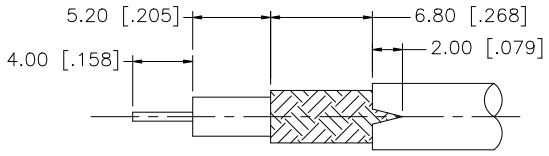

RECOMMENDED
CABLE STRIPPING DIM'S

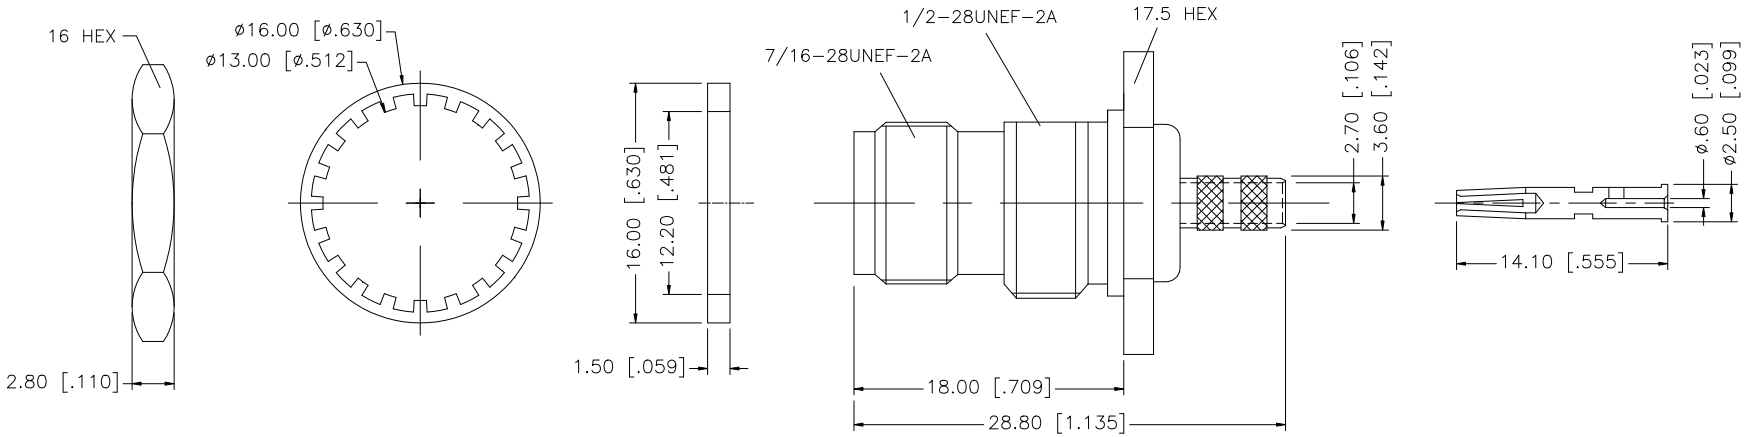

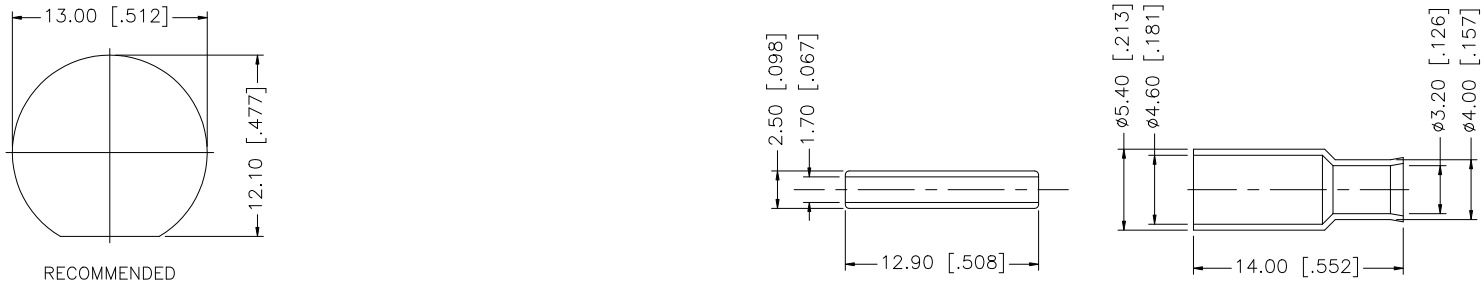

RECOMMENDED
MOUNTING HOLE

	DESCRIPTION	MATERIAL	FINISH	QTY
8	FERRULE	COPPER	NICKEL	1
7	SLEEVE	DELRIN	NATURAL	1
6	HEX NUT	BRASS	NICKEL	1
5	LOCK WASHER	BRASS	NICKEL	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	DELRIN	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	01/20/09
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/122/122358.DWG

Amphenol Connex

PART DESCRIPTION
TNC BULKHEAD CRIMP JACK
(FOR RG–174/U, 316/U DOUBLE BRAID)

PART NO. 122358

DWG. NO. 122358.DWG | REV. NC | SIZE A | SCALE NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-S08-07LF 86130202123355E1LF 95157-140LF LD25S33E4GV00LF 70218-1116LF 86093967896755LF 86093968191755E3LF 67996-204HLF 68000-236HLF 68001-200HLF 70234-112LF CD15S13E4RV09LF DCMF37P RJSBE5080C2 65781-158 86093488314745V1LF 91614-403ALF D15P13A6RV12LF 69192-408HLF DAPO15S365TLF LD15P33E4GV00LF 68002116HLF 863013A DEM09P032N 54202-G0805CLF 68001-108HLF 76384-316LF 70430-164LF 86093968813H45V1LF RJE061661210