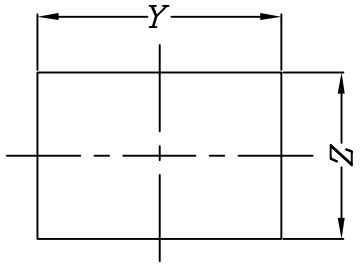

NOTES:
1.Circuit:Reset OFF ①
2.Operation farce: 800±300gf
3.Electrocal rating:10(4)A 250V~
10A 125V~
6A 250V~
4.Contact resistance:<30mΩ
5.Insulation resistance:>100MΩ(500VDC between open contacts)
6.Dielectric strength:>1500VAC 0.5mA 1 mintute
7.Color: cover is black, body is black.


Panel cut - out:

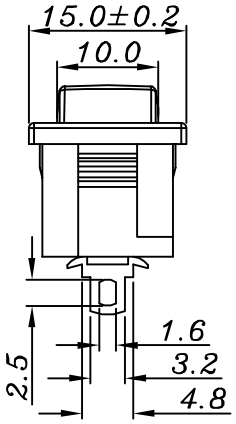
| X | Dim.Y | Dim.Z |
|---|---|---|
| 0.75~1.25mm | 19.20+0.1/−0 | 12.80+0.1/−0 |
| 1.25~2.0mm | 19.30+0.1/−0 | 12.80+0.1/−0 |

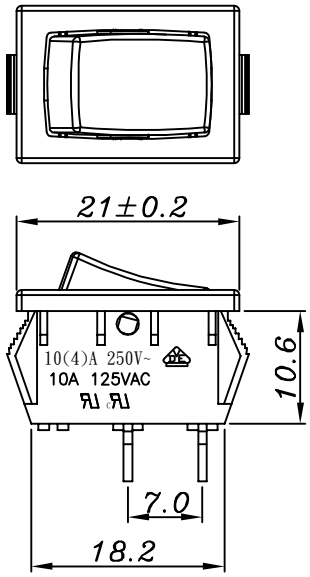




Circuit of Switch




| NO | DESCRIPTION |
|---|---|
| 5 | → |
| 4 | → |
| 3 | → |
| 2 | → |
| 1 | 500 → 800 |

| NO | DESCRIPTION |
|---|---|
| 10 | → |
| 9 | → |
| 8 | → |
| 7 | → |
| 6 | → |

| DIMENSIONAL TOLERANCES | |
|---|---|
| RANGE | TOLERANCE |
| X | ±0.4 |
| X.X | ±0.3 |
| X.XX | ±0.2 |
| ANGLES | ±0.5° |

| APPROVED | CHECKED | DESIGN | DRAWN |
|---|---|---|---|
| | | | simon 2008.11.07 |

ROCK TEK ELECTRICAL(SHENZHEN) CO.,LTD.

| | |
|---|---|
| ALL SIZE ARE IN | MM |
| SCALE | FIT |
| MAT'L | *** |
| MATERIAL NO. | RT-S01-145-L1NB1B |
| DRAWING NO. | ****** |
| REV | A |