



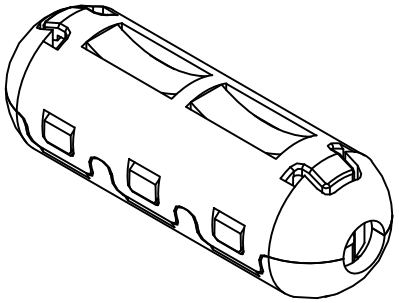

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	111 Ω	277 Ω	449 Ω
Minimum	- Ω	222 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

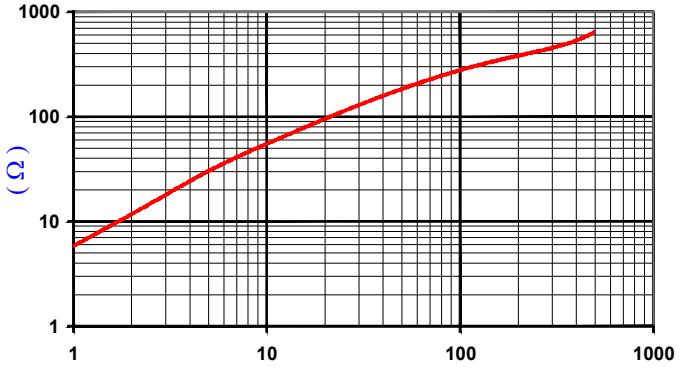

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 4360

NOTES:

1. ASSEMBLED PART #: 28A0434-0A2
2. CASE COLOR: BLACK-0A2.
3. CASE FLAMMABILITY RATING: UL94 V-0.
4. CASE MATERIAL: Halogen Free Nylon
5. CORE DIMENSIONS REFER TO 28A0434-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.
6. COSMETIC SPECIFICATION REFER TO WI-QA-038.

A	14.71 [.579]	±	1.00 [.039]
B	5.44 [.214]	±	1.00 [.039]
C	43.03 [1.694]	±	2.00 [.079]
D	–	±	–
E	2.92 [.115]	±	Ref.

DIMENSIONS ARE IN mm [INCHES].

REV	DESCRIPTION	DATE	INT
G	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 5&6	01/13/14	Jcai
F	UPDATE COMPANY LOGO ADD NOTES 3&4	01/27/09	JRK
E	CHANGE CASE DIM "C" TO 43.03 [1.694]	10/30/07	TMB
D	UPDATE 100MHz MINIMUM VALUE UPDATE COMPANY LOGO	07/03/07	TMB
C	CHG CASE DIMS & TOLERANCES ADD DIM "E" REMOVE NOTES "1","3",&"4"	06/30/06	TMB

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.

Laird™

PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
28A0434-0A2	G	FERRITE SNAP-ON	TMB

DATE:	SCALE:	MATERIAL:
10/27/04	N.T.S.	Ferrite

CAD # 28A0434-0A2-G
TOOL #

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Laird:

29220104 A15754-04 CC1812C513R-10 CMX1211Z601B-10 LI0603B201R-10 MI0805M221R-10 MI1210K600R-10 0097064502 28B0500-100 HI0805O121R-10 LI0603G221R-10 NS1050HA TRA6927M3PBN-001 28A0392-0A2 28R1141-010 CM3440Z171R-10 CMX1211Z680B-10 DM3312X101R-10 HF0402B102R-10 LFB095051-000 24296254 HI1206N680R-10 TYS30126R8M-10 28A1507-0A2 MGV201610R68M-10 MP1040-100 0097061102 28B0734-000 DA1206D301R-10 28A2005-0A2