



D款，反向10.0后两脚,SMT-*6.20

MAPX	MODIFICATION	DATE

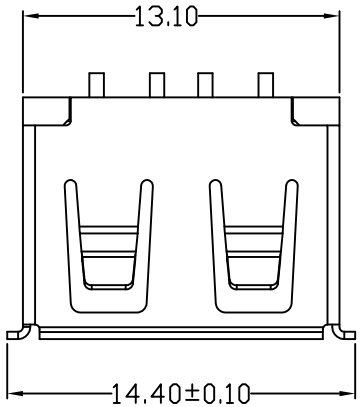

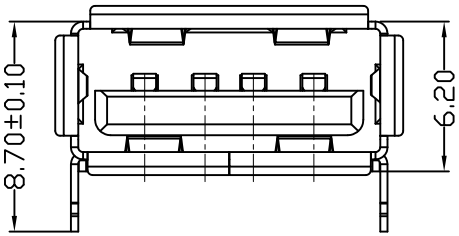


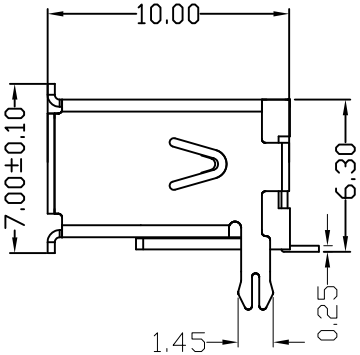

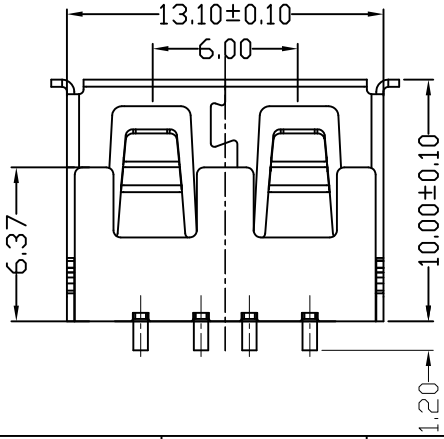

NOTES:
1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:
1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
3.ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
4.Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

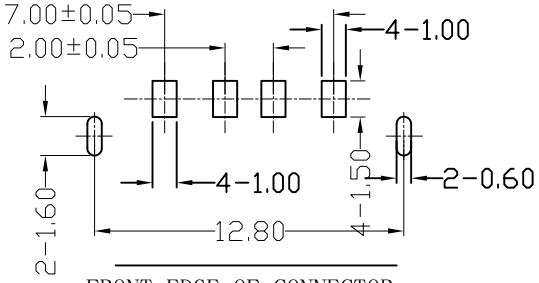

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.15	X.	±5.°
.X	±0.10	.X	±2.°
.XX	±0.05	.XX	±1.°
.XXX	±0.03	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	911-211B2026S10100
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0D款后两脚有边方弹铁壳反向 LCP黑胶6.2SMT
日期 DATE	2012.09.24	核准 APPD		角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

906-262A1021D10200 916-151A1022Y10200 904-232A2031S10100 904-232B2032S10100
906-752B1114D10200 907-111A1022D10200 917-P81A202ES60201 918-318K2023C40005
920-C62A2021S10103 911-221A2021S10100 912-112A2021S10100 920-A62A2021S10108
907-312A1101Y10210 912-312A1012D10100 918-415K3028S40000 920-C52A2021S10105
910-151A2021D10100 917-B88C201AH70201 920-154A2021Y10110 905-761A2032S10200
906-552A1012D10200 908-351A1011D10100 912-112A1011D10100 918-418K2022Y40011
920-A62A2021S10104 920-A64A2091S101A3 904-331B2032S10200 918-468K2029Y50000
919-162A1012D10400 920-F52A2021S10105