NHD-7.0-800480EF-ATXL#

TFT (Thin-Film-Transistor) Color Liquid Crystal Display Module

NHD-	Newhaven Display
7.0-	7.0” Diagonal
800480-	800xRGBx480 Pixels
EF-	Model
A-	Built-in Driver / No Controller
T-	White LED backlight
X-	TFT
L-	12:00 Optimal View, Wide Temperature
#-	**RoHS Compliant**

Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795 Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com nhsales@newhavendisplay.com


Document Revision History


Revision	Date	Description	Changed by
0	8/29/2013	Initial Release	ML
1	2/10/2015	Mechanical drawing updated	AK
2	4/1/2015	Mechanical drawing updated	AK
3	3/11/16	Added Backlight Lifetime, Datasheet Reformat	SB
4	7/5/16	Added Chromaticity	SB
5	6/20/19	Backlight Characteristics Updated	SB
6	1/21/20	LCD Driver Changed to EK9716	SB


Functions and Features

- **800xRGBx480 resolution**
- **LED backlight**
- **24-bit digital RGB interface**
- **16.7M colors**

SYMBOL	REVISION	DATE

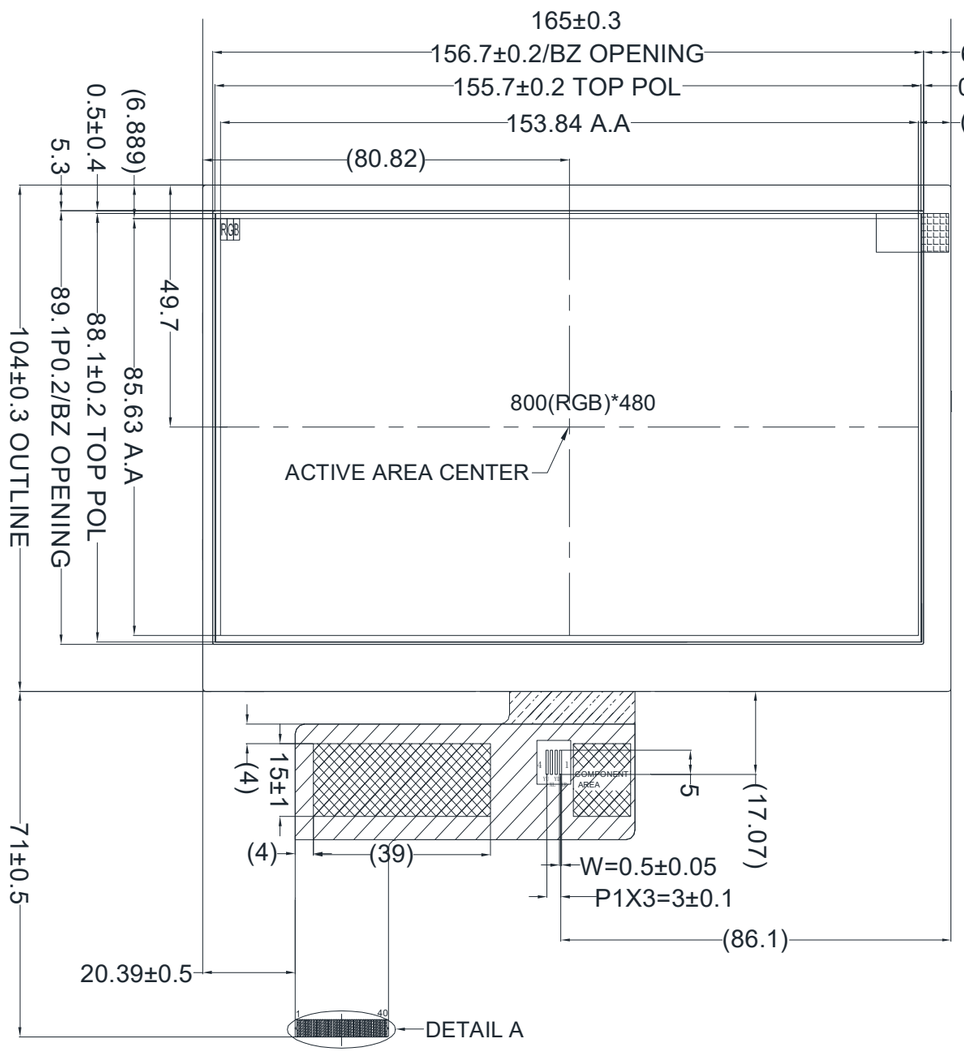

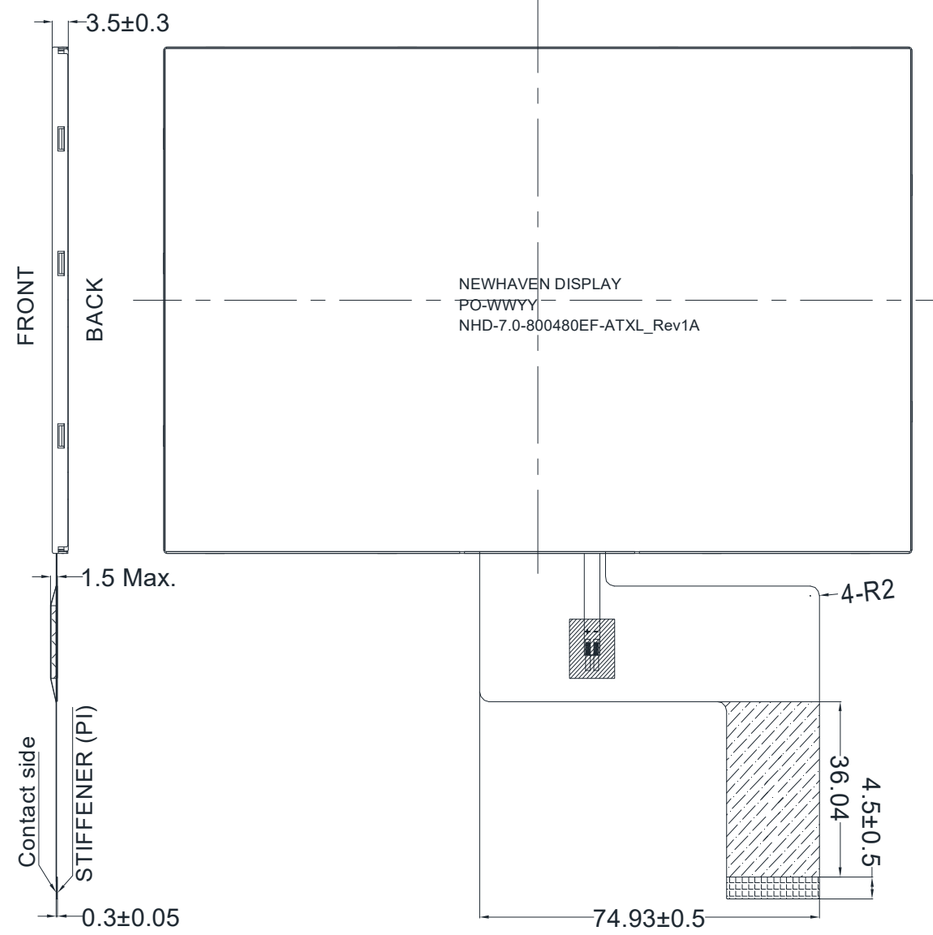



PIN	SYMBOL
1	LED-K
2	LED-A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

Notes:

1. Display Size:	7” TFT
2. Optimal View:	12:00
3. Display Mode:	Transmissive / Normally White / Anti-Glare
4. Driver IC:	EK9716 & EK73002
5. Supply Voltage:	3.3V
6. Backlight:	White LED / 16 V / 60 mA (Typ)
7. Brightness:	330 cd/m² (Typ)



LED CIRCUIT

5*3=15EA,20mA*3=60mA

STANDARD TOLERANCE:
(UNLESS OTHERWISE SPECIFIED)

LINEAR: ±0.3mm

UNLESS OTHERWISE SPECIFIED:
- DIMENSIONS ARE IN MILLIMETERS
- THIRD ANGLE PROJECTION

NEWHAVEN DISPLAY INTERNATIONAL

DRAWING/PART NUMBER: NHD-7.0-800480EF-ATXL#

REVISION: 1A

SIZE: A3

SCALE: NS

DRAWN BY: S. Baxi

APPROVED BY: S. Baxi

DRAWN DATE: 01/22/20

APPROVED DATE: 01/22/20

DO NOT SCALE DRAWING

SHEET 1 OF 1

THIS DRAWING IS SOLELY THE PROPERTY OF NEWHAVEN DISPLAY INTERNATIONAL, INC. THE INFORMATION IT CONTAINS IS NOT TO BE DISCLOSED, REPRODUCED OR COPIED IN WHOLE OR PART WITHOUT WRITTEN APPROVAL FROM NEWHAVEN DISPLAY.

Pin Description

Pin No.	Symbol	Connection	Function Description
1	LED-K	Power Supply	Ground for Backlight
2	LED-A	Power Supply	Backlight Power Supply (60mA @ 16V)
3	GND	Power Supply	Ground
4	VDD	Power Supply	Power Supply (+3.3V)
5-12	[R0-R7]	MPU	Red Data Signals
13-20	[G0-G7]	MPU	Green Data Signals
21-28	[B0-B7]	MPU	Blue Data Signals
29	GND	Power Supply	Ground
30	CLKIN	MPU	Clock for input data (Falling Edge Triggered)
31	DISP	MPU	Display on/off DISP=1: Display on
32	HSD	MPU	Line synchronization signal
33	VSD	MPU	Frame synchronization signal
34	DEN	MPU	Data Enable signal
35	NC	-	No Connect
36	GND	Power Supply	Ground
37	NC(XR)	-	No Connect
38	NC(YD)	-	No Connect
39	NC(XL)	-	No Connect
40	NC(YU)	-	No Connect

LCD connector: 0.5mm pitch 40-Conductor FFC. Molex p/n: 54104-4031 (top contact)
Backlight connector: on LCD connector **Mates with:** ---

Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Temperature Range	T_{OP}	Absolute Max	-20	-	+70	°C
Storage Temperature Range	T_{ST}	Absolute Max	-30	-	+80	°C
Supply Voltage	V_{DD}	-	3.0	3.3	3.6	V
Supply Current	I_{DD}	V_{DD}=3.3V. 25°C	47	95	143	mA
"H" Level Input	V_{IH}	-	0.7 * V_{DD}	-	V_{DD}	V
"L" Level Input	V_{IL}	-	V_{SS}	-	0.3 * V_{DD}	V
"H" Level Output	V_{OH}	-	V_{DD} – 0.4	-	V_{DD}	V
"L" Level Output	V_{OL}	-	V_{SS}	-	V_{SS} + 0.4	V
Backlight Supply Current	I_{LED}	-	30	60	75	mA
Backlight Supply Voltage	V_{LED}	I_{LED} = 60 mA	14	16	17	V
Backlight Lifetime*	-	T_{OP} = 25° C	20,000	50,000	-	Hrs.

*Backlight lifetime is rated as Hours until **half-brightness**, under normal operating conditions. The LED of the backlight is driven by current drain; drive voltage is for reference only. Drive voltage must be selected to ensure backlight current drain is below MAX level stated

Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Optimal Viewing Angles	Top	φY+	CR ≥10	-	70	-	°
	Bottom	φY-		-	60	-	°
	Left	θX-		-	70	-	°
	Right	θX+		-	70	-	°
Contrast Ratio		CR	-	-	500	-	-
Luminance		L_V	I_{LED} = 60 mA	260	330	-	cd/m^2
Response Time		T_R+T_F	T_{OP} = 25°C	-	25	-	ms
Chromaticity	Red	X_R	-	0.531	0.581	0.631	-
		Y_R	-	0.280	0.330	0.380	-
	Green	X_G	-	0.298	0.348	0.398	-
		Y_G	-	0.559	0.609	0.659	-
	Blue	X_B	-	0.102	0.152	0.202	-
		Y_B	-	0.057	0.104	0.154	-
	White	X_W	-	0.252	0.302	0.352	-
		Y_W	-	0.284	0.334	0.384	-

Driver Information


Built-in EK9716B Source Driver: https://www.newhavendisplay.com/appnotes/datasheets/LCDs/EK9716B_v1-1.pdf
Built-in EK73002AB2 Gate Driver: https://www.newhavendisplay.com/appnotes/datasheets/LCDs/EK73002AB2.pdf

Timing Characteristics

Parallel RGB Input Timing Requirements

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK Frequency		F_{clk}	28.2	29.2	40	MHz	-
DLCK Period		T_{clk}	25	34	-	ns	-
HSYNC	Period Time	T_h	908	928	1088	DCLK	Thw + Thbp = 88 DLCK is fixed
	Display Period	T_{hdisp}		800		DCLK	
	Pulse Width	T_{hw}	1	48	87	DCLK	
	Back Porch	T_{hbp}	87	40	1	DCLK	
	Front Porch	T_{hfp}	20	40	200	DCLK	-
VSYNC	Period Time	T_v	517	525	613	H	Tvw + Tvbp = 32 H is fixed
	Display Period	T_{vdisp}		480		H	
	Pulse Width	T_{vw}	1	1	3	H	
	Back Porch	T_{vbp}	31	31	29	H	
	Front Porch	T_{vfp}	5	13	101	H	-


DE Mode Timing Diagram

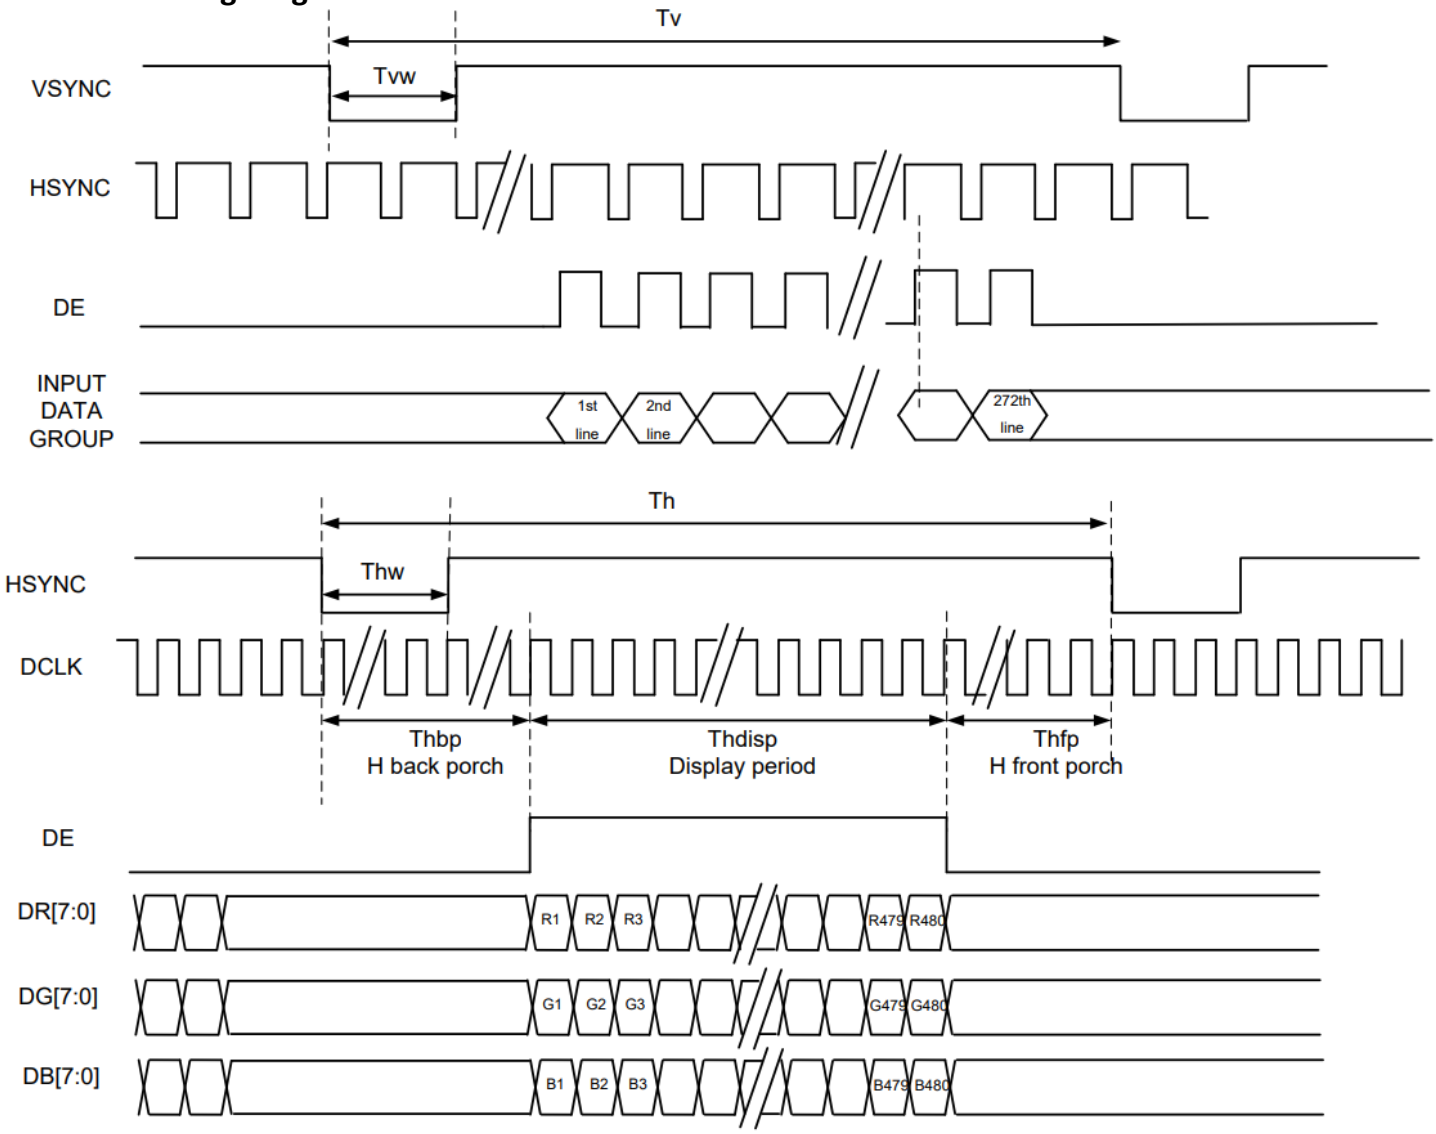


Input Setup Timing Requirements

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
V_{DD} Power Source Slew Time	T_{por}	-	-	20	ms	From 0V to 90% V_{DD}
CLK cycle time	T_{cph}	25	-	-	ns	-
CLK pulse duty	T_{cwh}	40	50	60	%	-
Data setup time	T_{dsu}	8	-	-	ns	-
Data hold time	T_{dhd}	8	-	-	ns	-
DEN setup time	T_{esu}	8	-	-	ns	-
DEN hold time	T_{ehd}	8	-	-	ns	-


Input Setup Timing Diagram

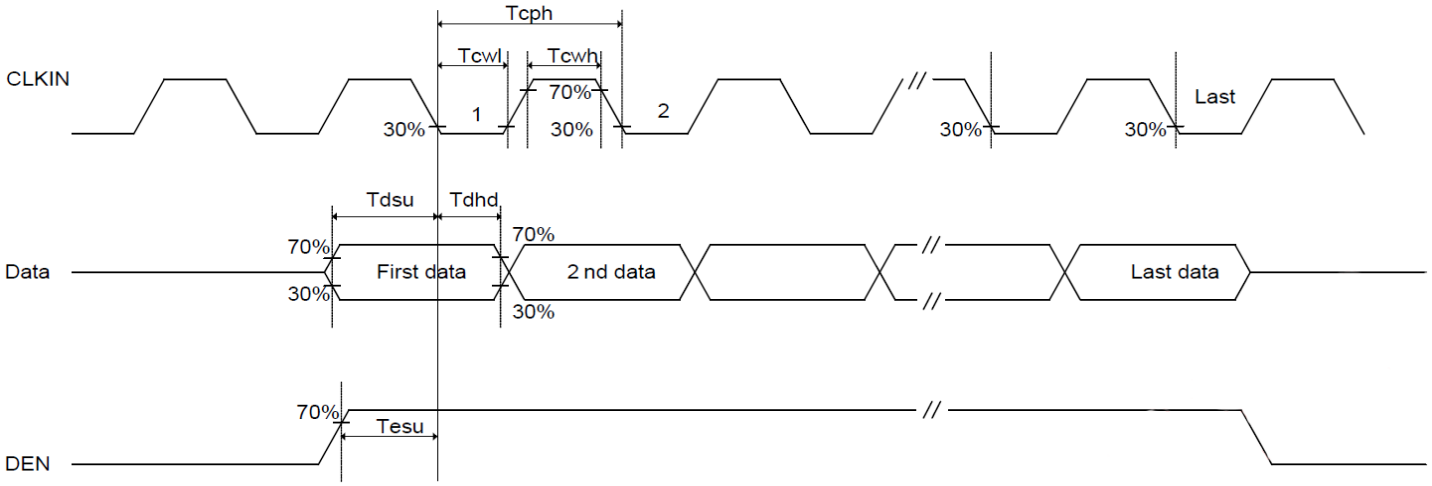

Power ON/OFF Sequence

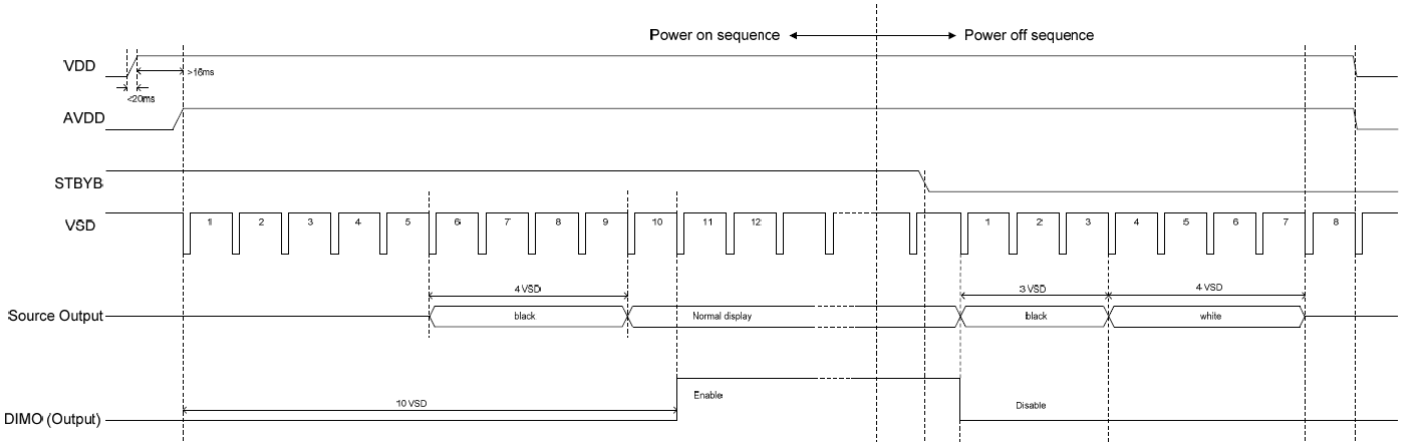

Enter/Exit Standby Mode Sequence

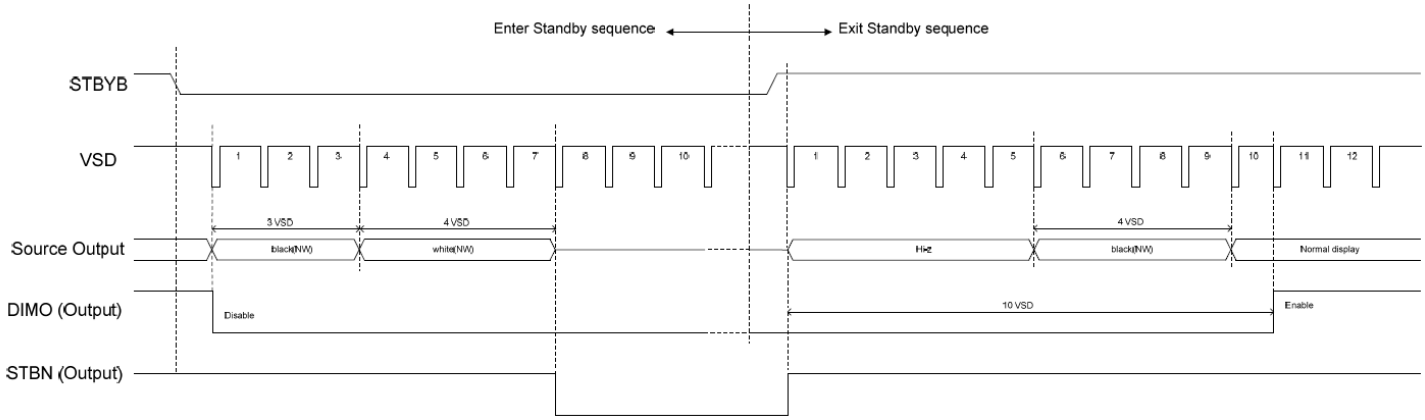

Quality Information

Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	+80°C, 96hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C, 96hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.	+70°C, 96hrs	2
Low Temperature Operation	Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.	-20°C, 96hrs	1,2
High Temperature / Humidity Operation	Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time.	+50°C, 90% RH, 96hrs	1,2
Thermal Shock resistance	Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.	-30°C, 30min -> 80°C, 30min, Change time 5min, 10 cycles	
Vibration test	Endurance test applying vibration to simulate transportation and use.	10-55Hz, 1.5mm amplitude. 60 sec in each of 3 directions: X, Y, Z For 15 minutes	3
Static electricity test	Endurance test applying electric static discharge.	Air: ±8KV 150pf/330Ω 5 Times Contact: ±4KV 150pf/330Ω 5 times	

Note 1: No condensation to be observed.
Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.
Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisplay.com/index.php?main_page=terms

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Newhaven Display:

M0216MD-162MDBR2-J NHD-0220DZ-FL-YBW NHD-0420CW-AB3 NHD-7.0-1024600AF-LSXP-CTP
NHD-7.0-800480AF-LSXP-CTP NHD-0216SZW-BB5 NHD-0220DZ-FSW-FBW NHD-0420AZ-FL-YBW-33V3
NHD-3.5-320240FT-CSXP-T NHD-5.5-25664UCG3 NHD-7.0-800480EF-ASXV#-CTP
NHD-2.4-240320CF-CSXV#-F NHD-2.4-240320CF-CTXI#-FT NHD-7.0-800480AF-ASXP-CTP NHD-FFC20-1
NHD-C0216CZ-NSW-BBW-3V3 NHD-0224AZ-FSW-GBW NHD-2.23-12832UCY3
NHD-3.5-320240JF-ASXP-CTP NHD-7.0-800480AF-LSXP-T NHD-4.3-800480EZ-ASXP-CTP
NHD-4.3-800480FT-CSXP-CTP NHD-7.0-800480AF-ASXP-T NHD-7.0-HDMI-N-RSXV-CTU
NHD-0216CW-AB3 NHD-2.1-480480AF-ASXP NHD-C0216AZ-FSW-GBW NHD-0220FZ-FSW-GBW-P-33V3
NHD-0420CW-AW3 NHD-3.12-25664UCY2