



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/02/17	J	DIM. 12.80 WAS 13.00 DIM. 13.60 WAS 14.22 DIM. 24.20 WAS 24.40 DIM. 0.90 WAS 1.02	T.B.	B.S.	
07/17/17	K	DIM. 51.31 WAS 51.40 DIM. 13.50 WAS 13.60 DIM. 24.51 WAS 24.20 DIM. 18.91 WAS 18.29 DIM. 5.70 WAS 5.49	T.B.	B.S.	
03/06/19	L	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

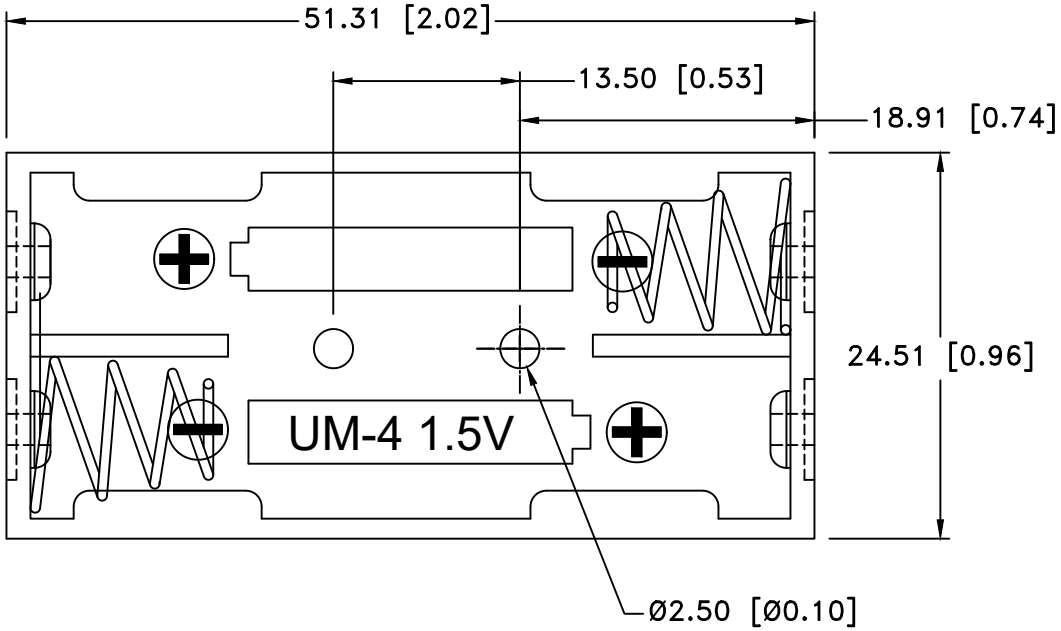

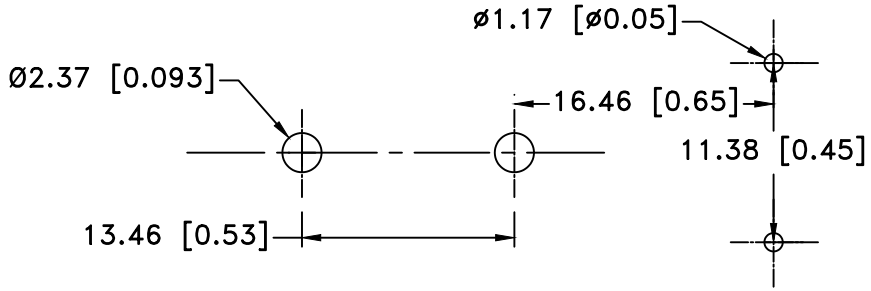

PCB LAYOUT

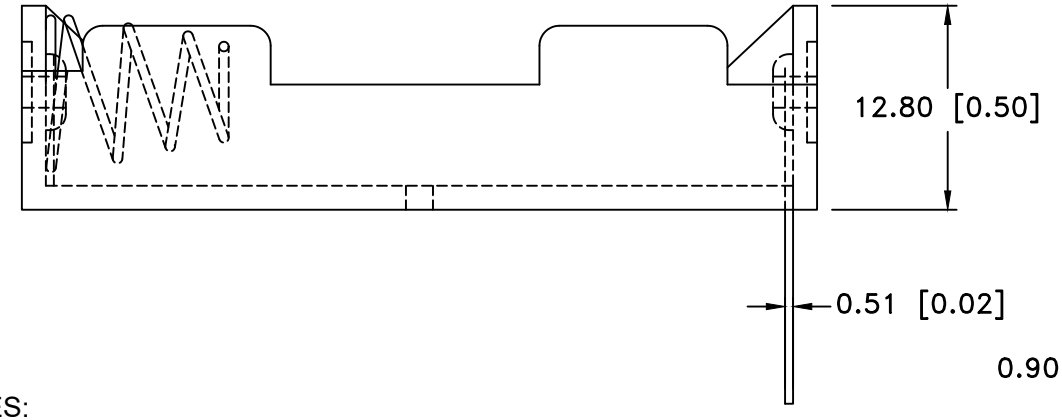

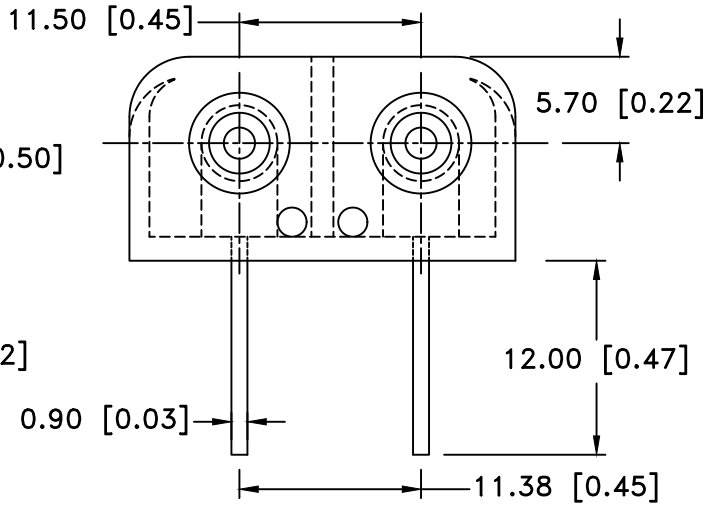

NOTES:

1. MATERIAL:
   - HOUSING : BLACK POLYPROPYLENE
   - FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
   - TEMPERATURE RANGE: -10°C to +100°C
   - RIVETS: BRASS, NICKEL PLATED.
   - SPRING: SPRING STEEL, NICKEL PLATED.
   - PC PINS: BRASS, NICKEL PLATED.
   - CONTACTS: SPRING STEEL, NICKEL PLATED.
   - CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000

ROHS COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title: TWO "AAA" CELL HOLDER WITH PC PINS		
Angular ± 3°	Date: 03/06/19	Drawing Number: BC2AAAPC	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Memory Protection Devices:

ZA1030 ZA5073 ZA5074-B BK-6010 EJ502B BK-6139 BLP2032SM-GTR ZA5018 APP-001 BK-414-TR BK-6210 BK-940-TR BU2032-1-HD-G SN-T5-1 ZA2070 172-0014 BC2/3AC BH600-G BU2032SM-JJ-GTR ZA5071 ZA5074 APP-001-15AMP BHSD-2032-COVER BK-876 BK-885 BU1632SM-JJ-GTR ZA5074-2.5 172-4207 BK-6001 BS-7