



由 Autodesk 教育版产品制作

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
⚠	侧弹变更	2013.3.10

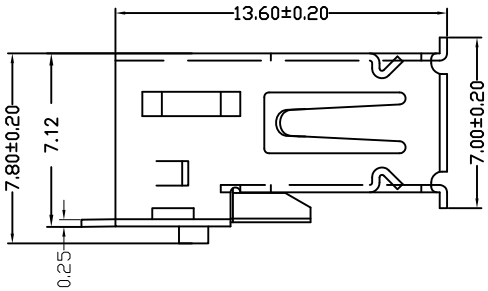

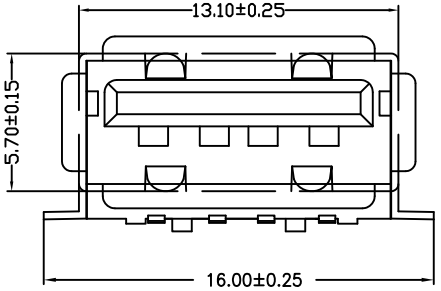

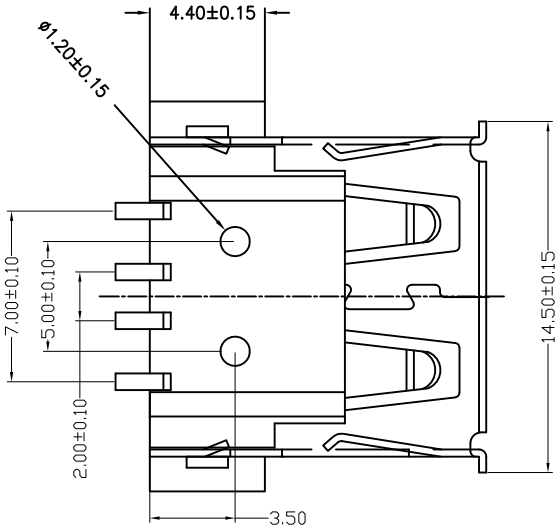

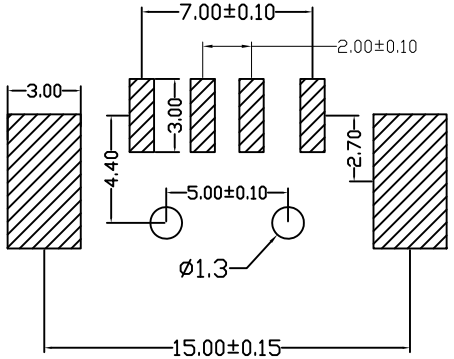

PCB LAYOUT

NOTES:
Housing: Thermoplastics
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating: 1.5 AMP. 30V AC
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30 MΩ Max.
Dielectric Withstanding Voltage: 500W AC
Temperature Range: −35℃ to +85℃
Insulator color: Black/White
Plastic material: PBT/LCP/Others
Shell finish: Nickel plated/Tin-Lead plated
Mechanical:
Mating Force: 3.5KG MAX
Unmating Force: 0.7 KG MIN.
Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

备注：侧弹分为外弹与内弹

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	904-131A2032S10100
X.	±0.25	X'.	±5'	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF方脚贴板有边内弹铁壳LCP本色1.2柱
.X	±0.20	.X'	±2'						
.XX	±0.15	.XX'	±1'	日期 DATE	2015.06.20	核准 APPD		角法 VIEW	版本 VER A0
.XXX	±0.10	.XXX'	±0.5'						

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

920-F52A2021S10105 904-232B2032S10100 918-318K2023C40005 918-468K2029Y50000
920-C52A2021S10105 906-752B1114D10200 908-351A1011D10100 912-112A2021S10100
917-B88C201AH70201 920-A64A2091S101A3 904-232A2031S10100 904-331B2032S10200
907-111A1022D10200 907-312A1101Y10210 920-C62A2021S10103 905-761A2032S10200
912-312A1012D10100 920-A62A2021S10108 912-112A1011D10100 920-154A2021Y10110
906-262A1021D10200 906-552A1012D10200 918-415K3028S40000 911-221A2021S10100
917-P81A202ES60201 919-162A1012D10400 920-A62A2021S10104 910-151A2021D10100
916-151A1022Y10200 918-418K2022Y40011