CPDZC5V0SPC-HF

1- Line Bi-directional TVS Diode


Features

- Ultra low leakage: nA level
- Operating voltage: 5V
- Low Clamping Voltage
- Complies with following standards:
  - – IEC 61000-4-2 (ESD) immunity test
    - Air discharge: ±15kV
    - Contact discharge: 8kV
  - – IEC61000-4-4 (EFT) 40A (5/50ns)
  - – IEC61000-4-5 (Lightning) 3A (8/20μs)
- RoHS Compliant


Applications

- 10/100/1000 Mbit/s Ethernet
- USB2.0/USB3.0
- HDMI
- Display ports
- MDDI ports
- Digital Visual Interface (DVI)
- Cellular handsets & accessories
- Computer and peripherals

Dimensions DFN0603

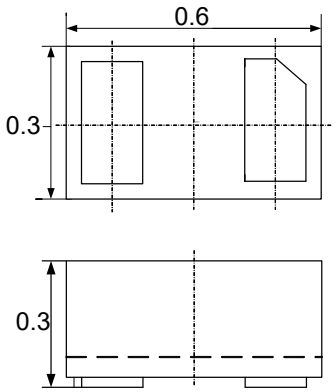

Pin Configuration



Mechanical Characteristics

- Package: DFN0603
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel:10,000pcs
- Reel Size:7 inch
- Device Marking:RV


Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	Ppp	50	W
ESD per IEC 61000−4−2 (Air)	V_{ESD}	±15	Kv
ESD per IEC 61000−4−2 (Contact)		±8	
Operating Temperature Range	T_J	-55 to +125	℃
Storage Temperature Range	T_{STJ}	-55 to +150	℃


Electrical Characteristics(TA=25°C unless otherwise specified)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	I_T = 1mA	5.8			V
Reverse Leakage Current	I_R	V_{RWM} = 5V			1	μA
Clamping Voltage	V_C	I_{PP} = 1A (8 x 20 μs pulse)			9.8	V
Clamping Voltage	V_C	I_{PP} = 3A (8 x 20 μs pulse)			15.8	V
Junction Capacitance	C_J	V_R = 0V, f = 1MHz			0.5	pF

Characteristic Curves

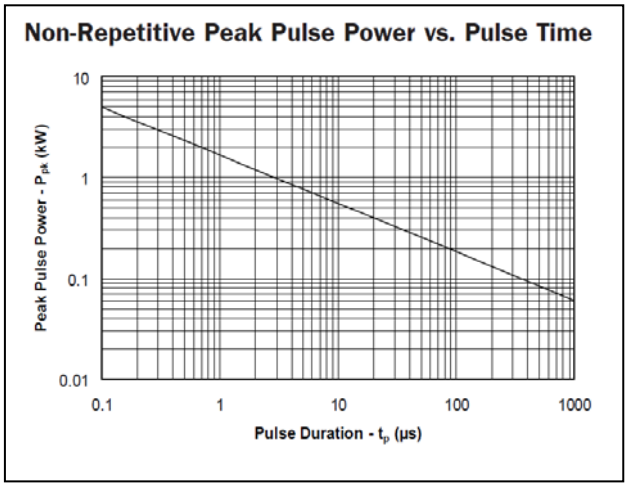


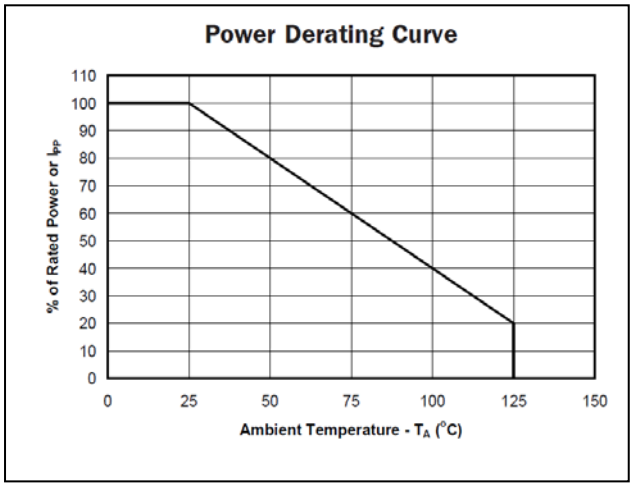

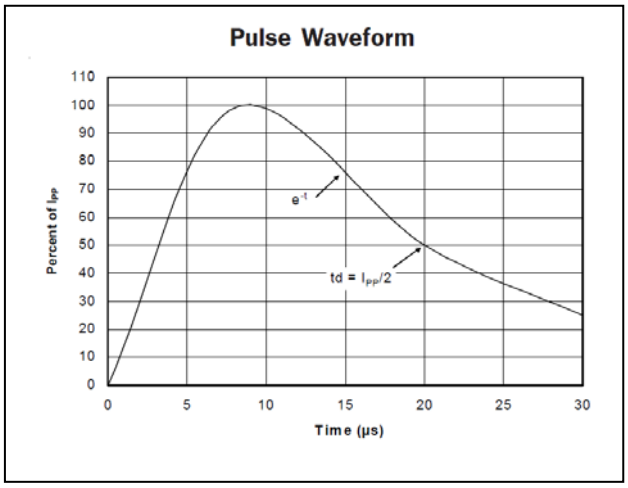

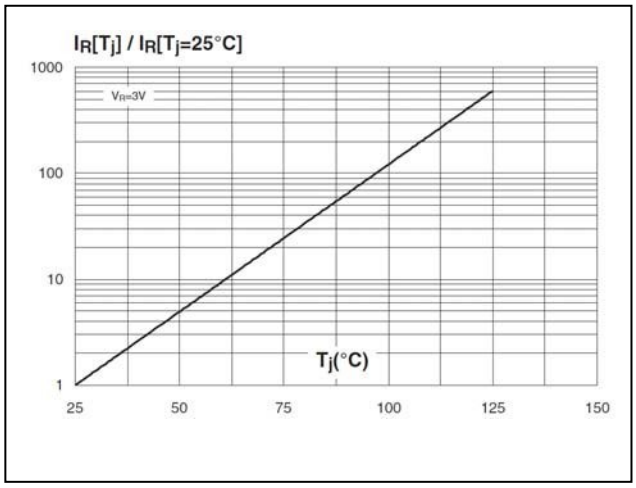


DFN0603 Package Outline Drawing

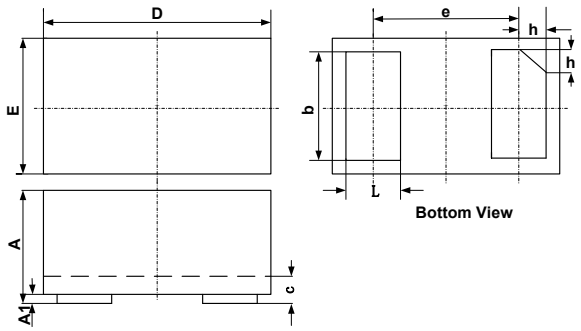

SYM	DIMENSIONS		
	MILLIMETERS		
	MIN	NOM	MAX
A	0.230		0.330
A1	0.000	0.020	0.050
b	0.215	0.245	0.275
c	0.120	0.150	0.180
D	0.550	0.600	0.650
e	0.355 BSC		
E	0.250	0.300	0.350
L	0.160	0.190	0.220
h	0.079 BSC		

Suggested Land Pattern

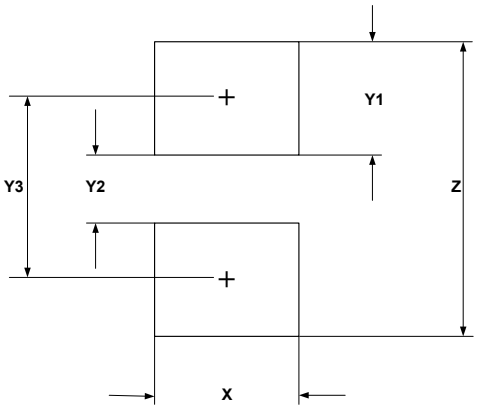

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X	0.30	0.012
Y1	0.25	0.010
Y2	0.15	0.006
Y3	0.40	0.016
Z	0.65	0.026

Shanghai Leiditech Electronic Co.,Ltd
Email: sale1@leiditech.com
Tel : +86- 021 50828806
Fax : +86- 021 50477059

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Leiditech:

L35L5V0CB2 LC24CI 1.5KE510A 1.5KE9.1CA HY05U-523 PESD36VS2UT SMS24C PS03CBUL2 SM8S26A NVTR4502P P4KE170CA TPD1E1B04DPYR-TP LMTL5P02 P4KE130A P4KE43CA P4KE480CA S3301TE SD33CW SE10F10B3.3A TPAOZ8804ADI 5.0SMDJ110CA CM1213-08MR LC0534N SDA1211CDN STL45N10F7AG ULC0521C ULC0524BLC P4KE120A P4SMFJ24CA 5KP9.0A