

RoHS 2015/863/EU REACH compliant Conflict minerals free

GEYER quartz technology

Quartz Crystal

SMD-version

part no.	12.86588
model	KX – 6T
frequency	15.4560 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±10 ppm
temperature tolerance -40° ~ +85°C	±15 ppm
load capacitance C_L	9 pF
series resistance R1 max.	130 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance C_O max.	3.5 pF
drive level max.	100 µW
contents of reel	1000 pcs.

Dimensions (mm):

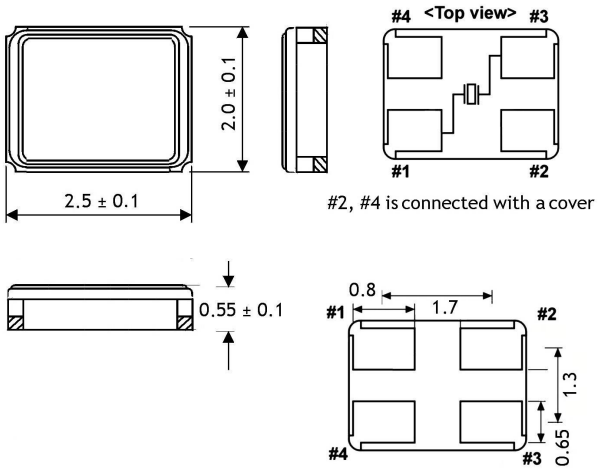

Reflow soldering condition:

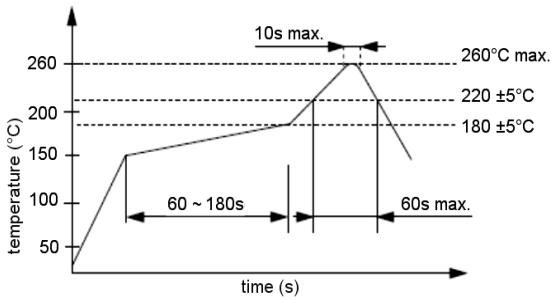

Tape specification:

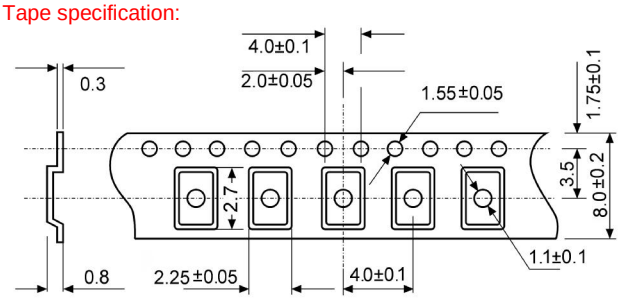

reel diameter 178 mm

Suggested soldering pad:



GEYER ELECTRONIC e.K. Lochhamer Schlag 5 82166 Gräfelfing/München
Tel. +49 89 546868-0 quartz@geyer-electronic.de ww.geyer-electronic.de

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Geyer Electronic:

12.60113 12.85526 12.89495 12.95542 12.95543 12.60370 12.84812 12.87148 12.87174 12.88664
12.89020 12.60146 12.87106 12.88603 12.86526 12.86533 12.89997 12.87150 12.85562 12.86564
12.90329 12.94474 12.89190 12.95102 12.95548 12.86512 12.87165 12.89126 12.90307 12.90325