
Description


The SV0603E180G0B is based on Multilayer fabrication technology. These components are designed to suppress a variety of transient events, including those specified in IEC 61000-4-2 or other standards used for Electromagnetic Compliance (EMC). The SV0603E180G0B is typically applied to protect integrated circuits and other components at the circuit board level. It can operate over a wider temperature range than zener diodes.



Features

- Lead Free type
- SMD type zinc oxide based ceramic chip
- Insulator over coat keeps excellent low and stable leakage current
- Plating termination provided good solderability characteristic
- Quick response time (<1ns)
- Low clamping voltage
- Meet IEC61000-4-2 standard
- Low capacitance can meet high speed single transient voltage protection

Equivalent Circuits



Applications

- Low capacitance product applications for high-speed signal lines such as HDMI, DVI, USB, IEEE 1394 Port etc.
- Normal capacitance product applications for I/O Port (RS232, USB, PS2, VGA, Audio) on Mother Board and Notebook, Set–Top Box, MP3 Players, DVD Players, and Docking System etc.

Electrical Characteristics (25±5℃)

Symbol	Minimum	Typical	Maximum	Units
V_{DC}	—	—	18	V
V_V	46	—	60	V
V_C	—	—	110	V
C_P	—	1	—	pF

V_{DC} – Maximum DC operating voltage the varistor can maintain and not exceed 10μA leakage current.


V_V – Voltage across the device measure at 1mA DC current.


Equivalent to V_B “breakdown voltage”

V_C – Maximum peak current across the varistor with 8/20μs waveform and 1A pulse current.

C_P – Device capacitance measured with zero volt bias 1Vrms at 1MHz. The pF is ±30%.

Construction & Dimensions

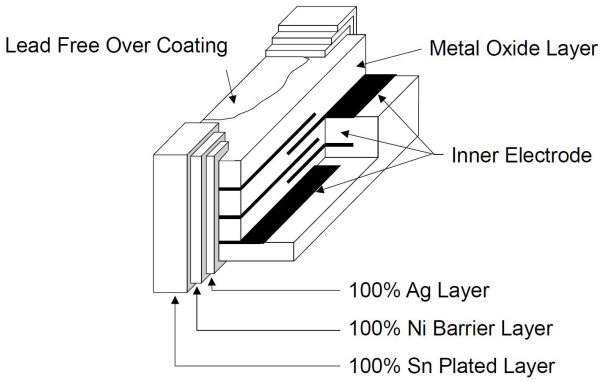




Size EIA (EIAJ)	0603 (1608)	
Symbol	Inches	Millimeters
L	0.063±0.006	1.60±0.15
W	0.031±0.004	0.80±0.10
T	0.031±0.008	0.80±0.20
C	0.012±0.008	0.30±0.20

Pad Layouts & Precaution for handling of substrate

Solder cream in reflow soldering

Refer to the recommendable land pattern as printing mask pattern for solder cream.

(1) Print solder in a thickness of 150 to 200μm




Size EIA (EIAJ)	0603 (1608)	
Symbol	Inches	Millimeters
A	0.040	1.02
B	0.030	0.76
D	0.020	0.50
E	0.100	2.54

Precaution for handling of substrate

Do not exceed to bend the board after soldering thes product extremely. (reference examples)

- Mounting place must be as far as possible from the position, which is close to the break line of board or on the line of large holes of board.
- Do not bend extremely the board, in mounting another component. If necessary, use back-up pin (support pin) to prevent from bending extremely.
- Do not break the board by hand. We recommend to use the machine or the jig to break it.

Soldering Parameters

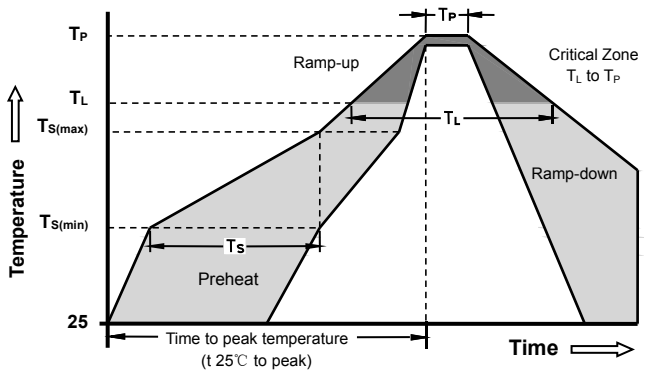

Reflow Condition		Pb-Free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max ($T_{s(max)}$)	+200°C
	-Time (min to max) (T_S)	60 -180 Seconds
Average ramp up rate (Liquidus Temp T_L) to peak		3°C/Second Max
$T_{S(max)}$ to T_L - Ramp-up Rate		3°C/Second Max
Reflow	- Temperature (T_L) (Liquidus)	+217°C
	- Time (min to max) (T_L)	60 -150 Seconds
Peak Temperature (T_P)		260 +0/-5°C
Time within 5°C of actual peak Temperature (T_P)		20-40 Seconds
Ramp-down Rate		6°C/Second Max
Time 25°C to peak Temperature (T_P)		8 minutes Max

Precaution for Soldering

Note that this product will be easily damaged by rapid heating, rapid cooling or local heating.
Do not give heat shock over 100°C in the process of soldering.
We recommend to take preheating and gradual cooling

Soldering gun procedure

Note the follows, in case of using solder gun for replacement.
1) The tip temperature must be less than 280 for the period within 3 seconds by using soldering gun under 30W
2) The soldering gun tip shall not touch this product directly.

Soldering volume

Note that excess of soldering volume will easily get crack the body of this product.

General Technical Data

Operating Temperature		-40 ~ +85ºC
Storage Temperature		-40 ~ +85ºC
Response Time		<1 ns
Solderability		245±5ºC, 3±1sec
Solder leach resistance		260±5ºC, 10±1sec
Taping Package Storage Condition	**Storage Temperature**	5 ~ 40ºC
	Relative Humidity	To 65%
	Storage Time	12 Months max

Environmental Performance

Item	Specifications	Test Condition
Bias Humidity	$\triangle V_V / V_V \leq \pm 10$ %	90%RH, 40ºC, Working Voltage, 1000 hrs
Thermal Shock	$\triangle V_V / V_V \leq \pm 10$ %	-40ºC to 85ºC, 30 min. cycle, 5 cycles
Full Load Voltage	$\triangle V_V / V_V \leq \pm 10$ %	Working Voltage, 85ºC,1000 hrs

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

KUU:

GBLC15CI SMDJ16A SMBJ160CA SMDJ7.5CA 1N60PW B340A LSMD050 MBR0540-7-F SMDJ7.0A SMDJ9.0A WNM4002-3/TR 1N5819W S4 KMOV0402E180C030T SMDJ8.5A ESD3V3D523-2U LSMD150 SMBJ17A K1N5819HW-7-F KNTC0603/10KF3950 SD103AWS S4 SM712.TCT BV03C ESD0301BU MSMD150 PESD12VS1UB SJD12C15L01 SMF15A ESD05V32D-LC MSMD050/24 SMBJ6.0CA